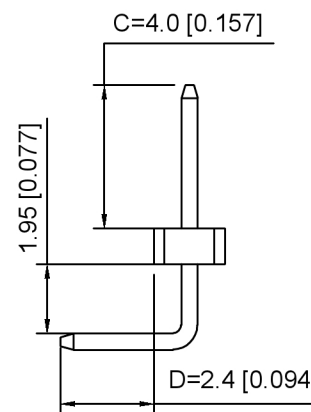
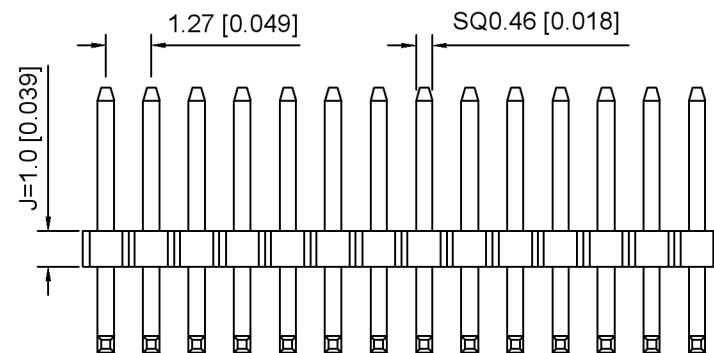
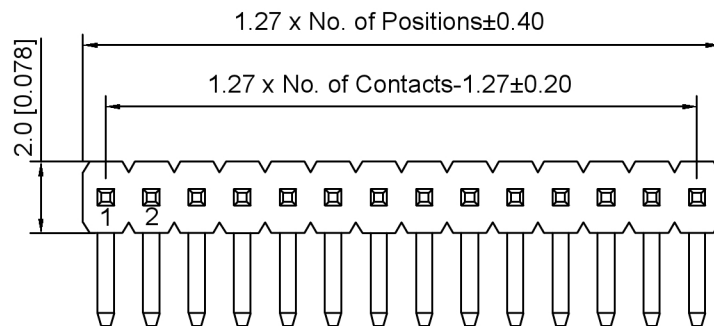


PCB LAYOUT

Specifications:

规格:

Voltage rating:250V AC/DC

额定电压: 250V AC/DC

Current rating:1A AC/DC

额定电流: 1A AC/DC

Withstanding voltage:300V AC/minute

耐受电压: 300V AC/分钟

Temperature range:-40℃-+105℃

温度范围: -40℃-+105℃

Insulation resistance:≥1000MΩ

绝缘电阻: ≥1000MΩ

Contact resistance:≤20mΩ

接触电阻: ≤20mΩ

Material:PA6T UL94V-0

材质: PA6T UL94V-0

Plating Category:1U"Gold

镀层: 1U"Gold

Wave soldering temperature:255±5℃, 10S

波峰焊温度: 255±5℃, 10S

X1311 W R - XX J - C40 D24
① ② ③ ④ ⑤ ⑥ ⑦

1.Series No

2.Category:W-Wafer

3.Welding Board Angle:R-Straight 90°

4.Row No.Pin No:XX Pin

5.Plastic height:J=1.0 mm

6.Pin Length:C=4.0mm

7.Pin Length:D=2.4

X1311WR-XXJ-C40D24	PA6T	Brass	X1311F
PART NO	Material	Material(Pin)	Suitable XKB Female

广东星坤科技股份有限公司			
ΔX		日期	
ΔX		日期	
ΔX		日期	
MARK	DESCRIPTION	DATE	REVISED
文件工程章			

				ANGLAR	±5°
				L≤ 4	±0.2
				4<L≤ 16	±0.3
				16<L≤ 63	±0.4
ON	DATE	REVISED	APPROVED	L> 63	±0.5
REVISIONS				UNSPECIFIED TOLERANCES	
www.helloxb.com www.helloxb.cn www.xk-dq.cn					

XKB

XKB INDUSTRIAL PRECISION CO.,LIMITED

DSND		SCALE: N/A	MODEL TYPE: 1.27mm BTB Connector
DWN		VIEW:	PART NO.: X1311WR-XXJ-C40D24
CHKD		UNIT: mm/in	DWG NO.: X-X1311WR-XXJ-C40D24
APPD		SIZE: A4	
			WEIGHT
			SHEET 1/1
			REVISION A0