
V2-7.0-0-SP-SM <

RAYCHEM | RAYCHEM Versafit V2

TE Internal #: 674983J001 Black, 2:1, Single Wall Tubing, Shrinks To 3.5 mm [.138 in], Irradiated Modified Polyolefin, 7.6 mm [.299 in] Inner Diameter, RAYCHEM Versafit V2

View on TE.com >

Heat Shrink Tubing > Versafit-V2 Heat Shrink Tubing

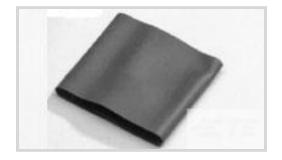

Primary Product Color: Black Wall Type: Single Wall Expanded Inside Diameter (Min): 7.6 mm [.299 in] Recovered Inside Diameter (Max): 3.5 mm [.138 in] Shrink Ratio: 2:1

All Versafit-V2 Heat Shrink Tubing (37)

Features

Product Type Features

Wall Type



Single Wall

Electrical Characteristics

Operating Voltage (Max)	.6 kV
Body Features	
Primary Product Color	Black
Shrink Ratio	2:1
Primary Product Material	Irradiated Modified Polyolefin
Flexibility	Very Flexible
Dimensions	
Recovered Wall Thickness (Tolerance)	.56 mm[.022 in]
Expanded Inside Diameter (Min)	7.6 mm[.299 in]
Recovered Inside Diameter (Max)	3.5 mm[.138 in]
Jsage Conditions	
Shrink Temperature (Min)	70 °C
Tubing Flammability Type	Highly Flame-Retardant
Operating Temperature Range	-30 – 125 °C

C For support call+1 800 522 6752

V2-7.0-0-SP-SM

Black, 2:1, Single Wall Tubing, Shrinks To 3.5 mm [.138 in], Irradiated Modified Polyolefin, 7.6 mm [.299 in] Inner Diameter, RAYCHEM Versafit V2



Recovery Temperature	90 °C
Operation/Application	
Mechanical Resistance	Strain Relief, Wrinkling
Product Availability	
Applicable Region	Global
Packaging Features	
Packaging Method	Spool
Other	
Meets Low Outgassing Requirements	No
Product Source	China
Product Compliance	
For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241)

Halogen Content

Solder Process Capability

(241)

Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC

Not Low Halogen - contains Br or Cl > 900 ppm.

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

V2-7.0-0-SP-SM


Black, 2:1, Single Wall Tubing, Shrinks To 3.5 mm [.138 in], Irradiated Modified Polyolefin, 7.6 mm [.299 in] Inner Diameter, RAYCHEM Versafit V2





TE Part # EG1114-000 CV1981-ST-230V1600W-EU

Also in the Series | RAYCHEM Versafit V2

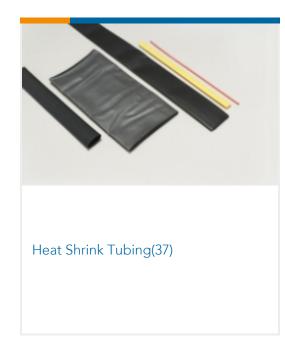

Customers Also Bought



= TE		
TE Part #115607J001 Versafit-V2 Heat Shrink Tubing	TE Part #1-2069029-2 DYNAMIC 1500T REC HSG 6P X BLACK	TE Part #2151110-1 OCEAN_2.0_APPLICATOR-S- 036F057F-RSM

Documents

Product Drawings V2-7.0-0-SP-SM

English

Datasheets & Catalog Pages

Highly Flame-Retardant, Low Recovery Temp., Metric-Sized Heat-Shrinkable Tubing

English

Versafit V2 Tubing

English

Product Specifications Application Specification

English