




# Miniature Slide Switches

## Specifications:


Contact rating:	250 V AC, 1 A / 120 V AC or 28 V DC, 3 A
Contact resistance:	< 50 mΩ
Insulation resistance:	> 1000 MΩ
Dielectric strength:	1000 V, 50 Hz for the duration of 1 minute
Operating temperature:	-40 °C to +85 °C
Mechanical life:	minimum 20 000 operations
Material:	Actuator: nylon, black Case: nylon, black Base: nylon, white
Contacts/Terminals:	copper alloy, silver-plating
Soldering conditions:	wave-soldering – max.: 5 sec, 260 °C ± 5 °C

## Models: Switching functions



MSS 3011 D on – on

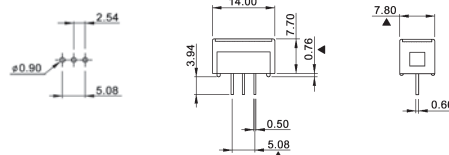

MSS 3112 D on – on

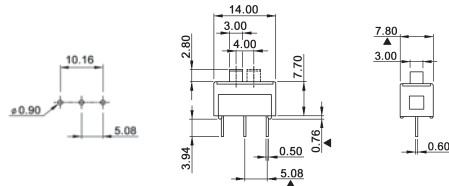

MSS 3121 N-R on – on

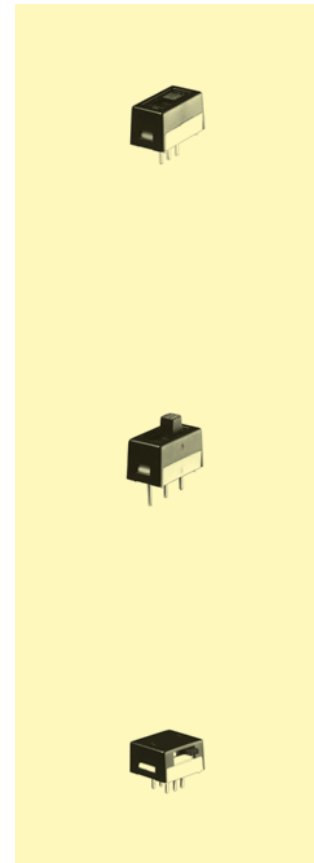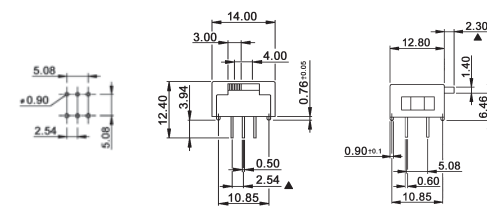

## Ordering code:

