

SPECIFICATIONS

Mechanical

Mating Force: 3.50Kg (7.71Lb) max.

Unmating Force: 1.00Kg (2.20Lb) min.

Durability: 1500 Cycles

Electrical

Current Rating: 1.5A

Contact Resistance: 30mW max.

Dielectric Withstanding Voltage: 500V AC/1min min.

Insulation Resistance: 1000MW min.

Physical

Housing: Thermoplastic, UL 94V-0 rated

Contact and Shell: Copper alloy

Plating: See "ORDERING INFORMATION"


Operating Temperature: -55 to +85

USB Connector


UB Series

Right Angle, T/H

4 Pos.



DRAWING

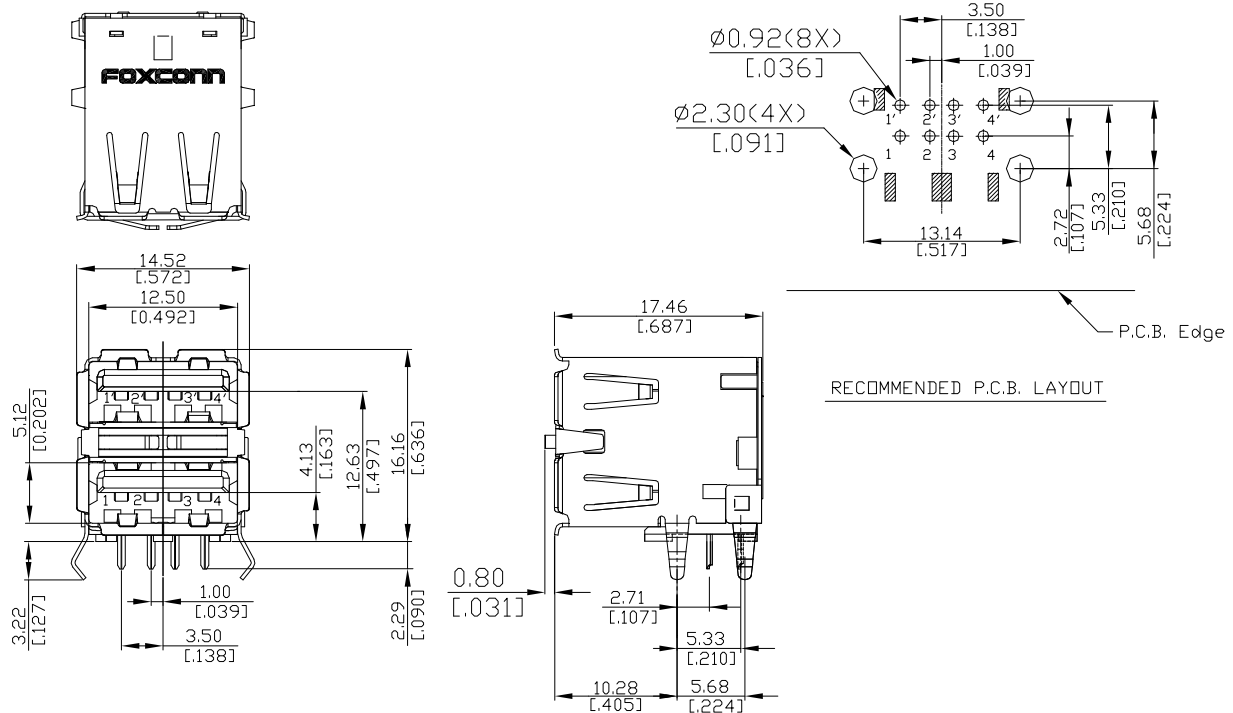

ORDERING INFORMATION

PRODUCT NO.: UB 1 1 1 2 *-8D1-4 F

USB Series

USB A Type

Termination Type

0= Straight

1= Right Angle

3= Up Right

5= SMT

Contact Design Type

1= Female

No. of Pos

1= 4 Pos

Profile Height

2= 4.13 [0.163]

3= 6.50 [0.256]

Lead Free Type

F= Lead Free

Package Code

4= Soft Tray

Modification Code

Contact Area Plating

3= 30u" Gold

C= 30u" Pd/Ni+Gold Flash

UB1112C-8D1-4F	30u" Pd/Ni+GOLD FLASH AT CONTACT AREA
UB11123-8D1-4F	30u" GOLD PLATED AT CONTACT AREA
P/N	PLATING