





REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.06.23	阿树



CIRCUIT DIAGRAM


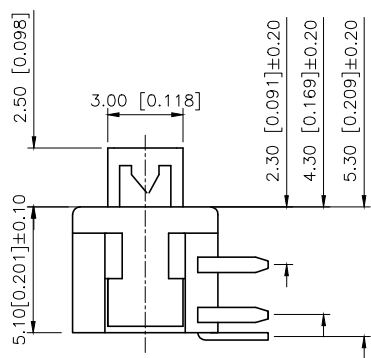


FEATURES
Light operating force
Long term low contact resistance
Momentary or latching operation
Short stroke 1.5mm to latch

SPECIFICATIONS	
1.ELECTRICAL	
Contact rating	0.1A, 30VDC
Contact resistance	50mΩ Max
Insulation resistance	100MΩ Min .at 250VDC
Dielectric strength	250VAC Min .for 60sec

2.MECHANICAL AND ENVIRONMENTAL	
Temperature rating	Operating -15 to +55 storage -25 to +65
Operation	250±50gf
Stroke	Lock Stroke .15±0.2mm Full stroke, 2.0±0.2mm
Operating life	Full load: 1x10 ⁴ cycles NO load: 1x10 ⁵ cycles
Contact form	DPDT

PART NO	XKB5858-X-E-75
OPERATION	W:NO LOCK Z:LOCK



7	Contact	2	Phosphor Bronze	Plating silvering
6	Terminal	6	Brass	Plating silvering
5	Spring	1	Sus	Natural
4	Base	1	PPA	
3	Crochet Needle	1	Sus	Natural
2	Cover	1	PPA	
1	Keystake	1	PPA	
ITEM	PAPT NAMF	QTY	MATERIAL	FINISHING

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:	MODEL TYPE: KEY SWITCH
CHECKED		UNIT: mm/in	PART NO.: XKB5858-X-E-75
APPROVED		SIZE: A4	DWG NO.: