

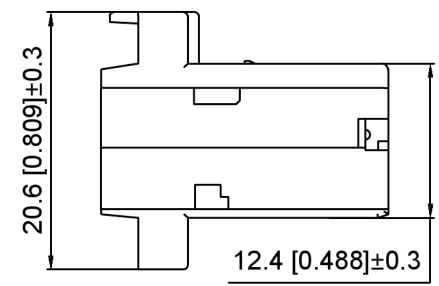
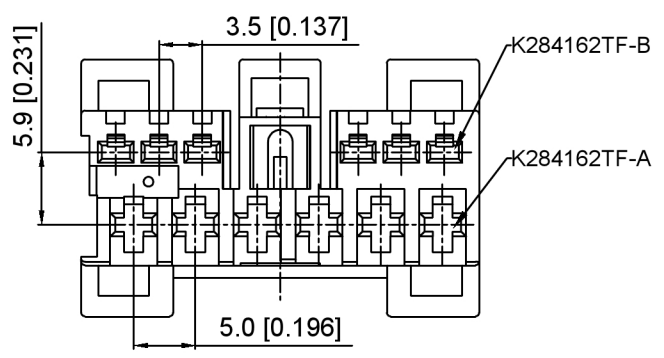



Current rating:3A AC/DC  
 额定电流: 3A AC/DC  
 Temperature range:-40℃-+125℃  
 温度范围: -40℃-+125℃

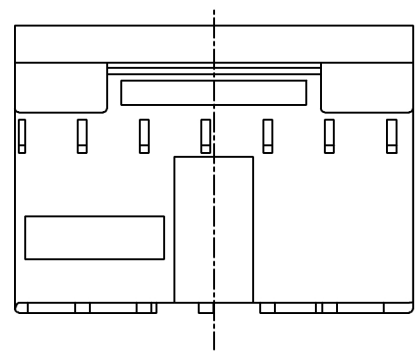

**K 284162 H M - XX - NO X**  
 ① ② ③ ④ ⑤ ⑥ ⑦

- 1.K: XKBTEK-Car Connector
- 2.XKB Series No
- 3.Category:H-Housing
- 4.Category:M-Male Housing
- 5.Row No.Pin No:XX-12 Pin
- 6.Material:NO-PA66 UL94V-0
- 7.Color:W-White ; G-Green

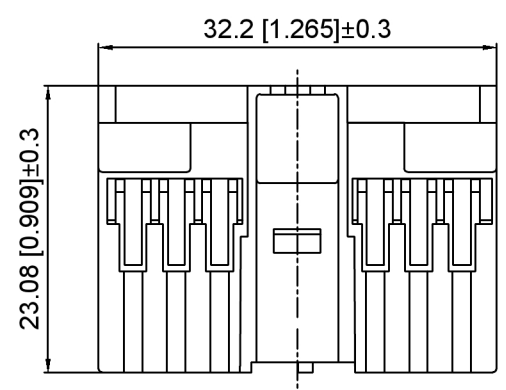

K284162HM-XX-NOX	PA66	K284162W	K284162HF	K284162TF-A/B	K284162C	K284162L
PART	Material	Suitable XKB Wafer	Suitable XKB Housing	Suitable XKB Terminal	Suitable XKB lid	Suitable XKB clip

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
ΔX					ANGLAR ±5°
ΔX					L ≤ 4 ±0.2
ΔX					4 < L ≤ 16 ±0.3
					16 < L ≤ 63 ±0.4
					L > 63 ±0.5

**XKB**

DSND	SCALE: N/A	MODEL TYPE: 5.0mm automotive connector
DWN	VIEW:	PART NO.: K284162HM-XX-NOX
CHKD	UNIT: mm/in	DWG NO.: X-K284162HM-XX-NOX
APPD	SIZE: A4	WEIGHT SHEET REVISION
<b>XKB INDUSTRIAL PRECISION CO., LIMITED</b>		1/1 A0