


Jun.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

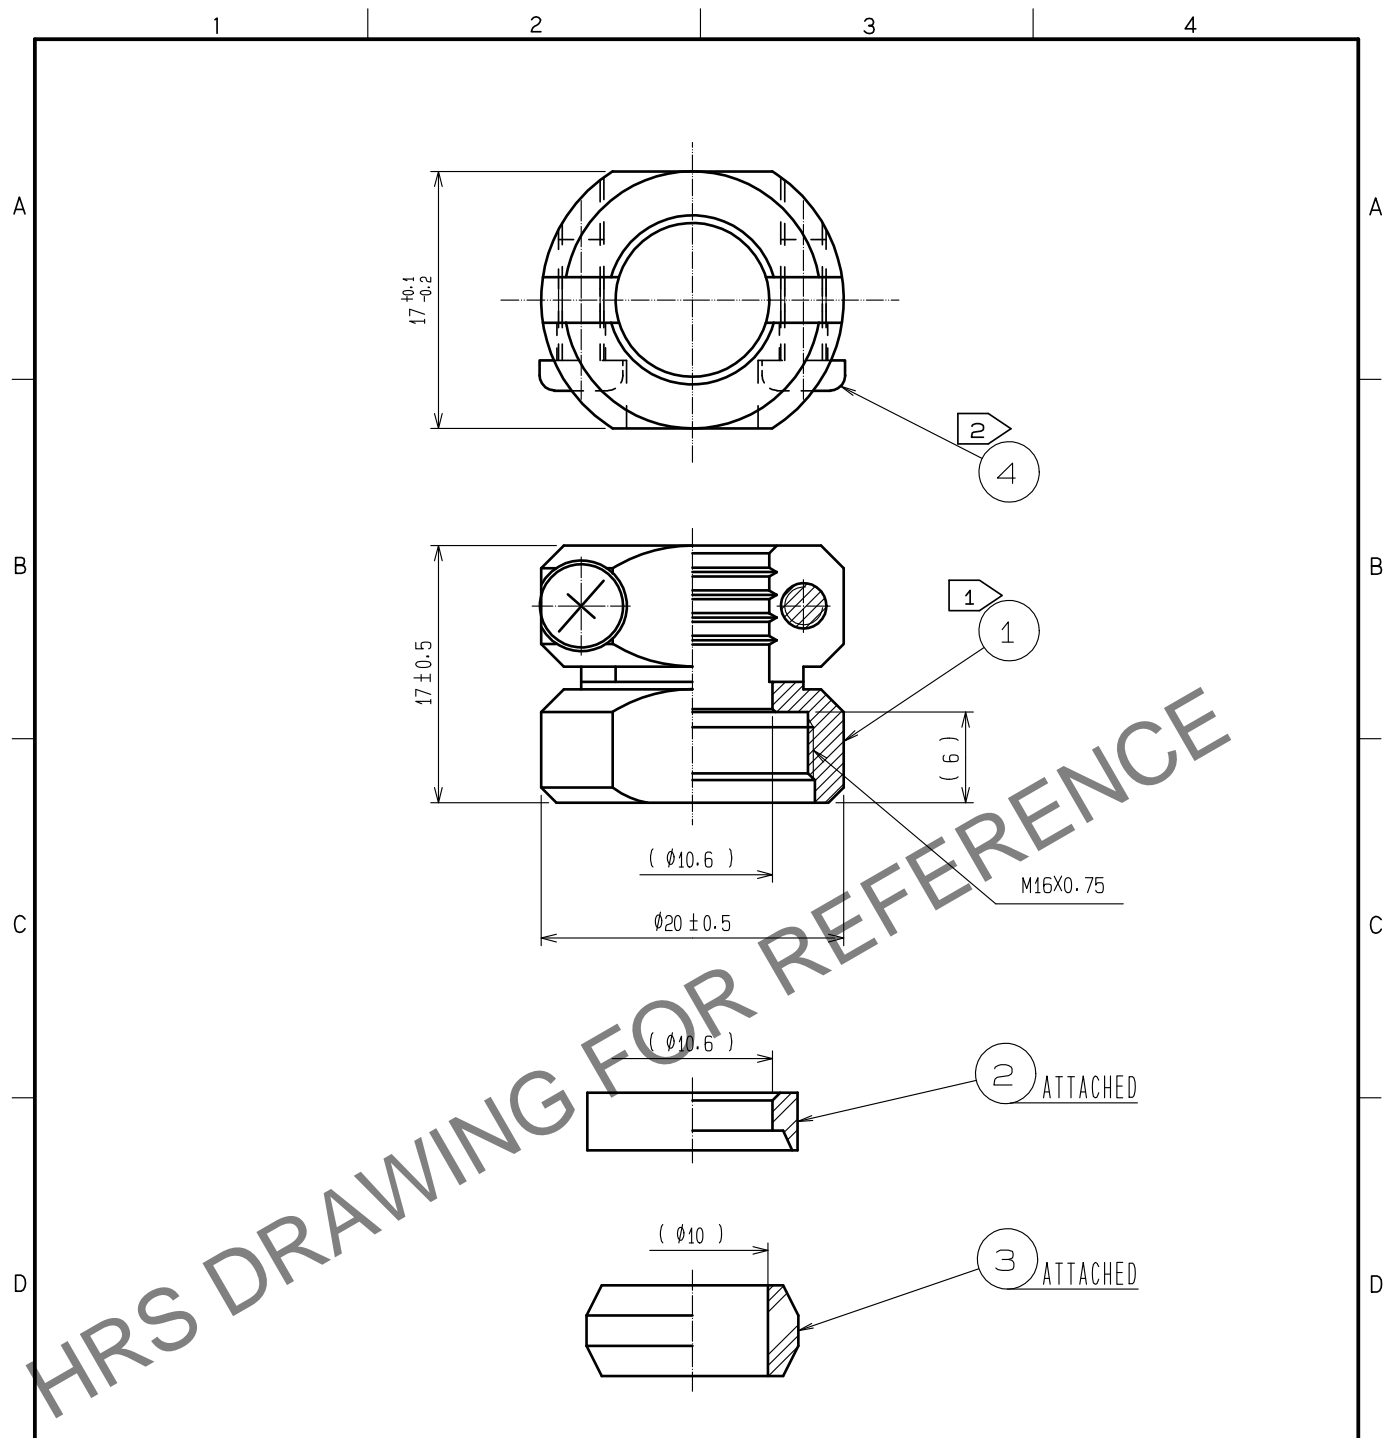

- NOTES
- ① THE RECOMMENDED CLAMP TRQUE OF REF. NO. ① TO BE 2 TO 2.5 N · m  
LOCTITE 263, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO PREVENT  
REF. NO. ① FORM LOOSENING.
  - ② THE RECOMMENDED CLAMP TRQUE OF REF. NO. ④ TO BE 0.65 TO 0.7 N · m

2	POLYPHENYLENE SULFIDE	(BLACK) UL94V-0	4	STAINLESSS STEEL	M3×0.5×8		
1	BRASS	BLACK CHROME PLATING	3	ACRYLONITRILE BUTADIENE RUBBER	(GRAY)		
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS		
UNITS mm		SCALE 2 : 1	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
HIROSE ELECTRIC CO., LTD.		APPROVED	·HY. KOBAYASHI	18. 02. 26	DRAWING NO. EDC-110458-31-00		
		CHECKED	·HY. KOBAYASHI	18. 02. 26	PART NO. JR13WCC-10(31)		
		DESIGNED	·TH. KAMEYA	18. 02. 23	CODE NO. CL114-2051-3-31		
		DRAWN	·MK. INOUE	18. 02. 23	1/1		