
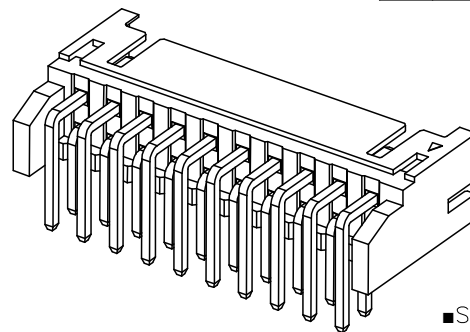


	REVISIONS				
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.9.25	阿树

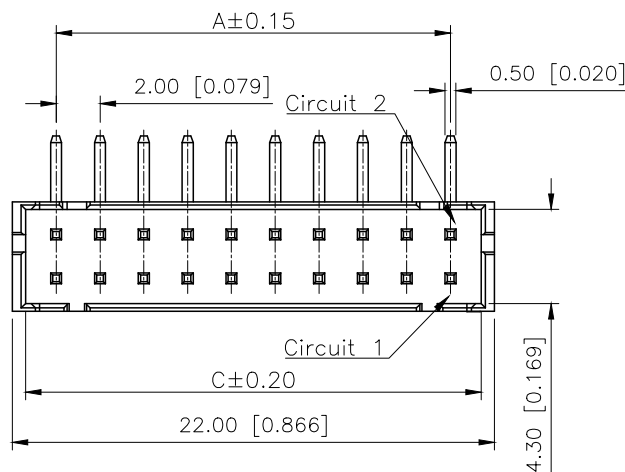




■ SPECIFICATIONS

- Voltage rating:250V AC/DC
- Current rating:3A AC/DC
- Withstanding Voltage:800V AC/minute
- Temperature range:-40°C~+125°C
- Insulation resistance:≥1000MΩ
- Contact resistance:≤10mΩ
- After environmental testing:≤20mΩ

PART NO.:

X2026 W R-2XX-N0 XX XX
① ② ③ ④ ⑤ ⑥ ⑦

- ①Series: No
②Category: W—Wafer
③Welding Board Angle: R—Straight 90°
④Row No. Pin No: 2xXX—2x02~2x22Pin
⑤Material: N0—PA66 UL94V-0
⑥Planting: SN—Bright tin plating
V01—All Gold Flash
⑦Color: Blank—Natural Color

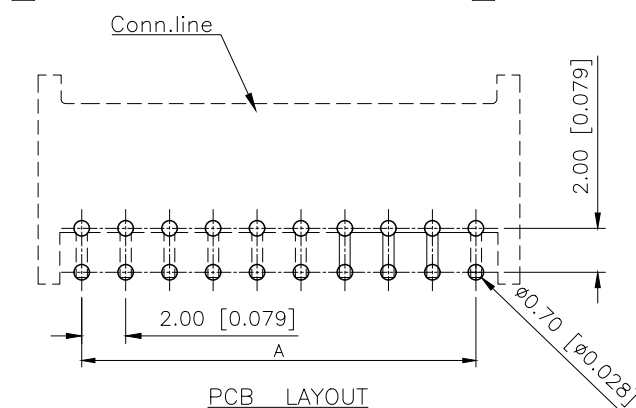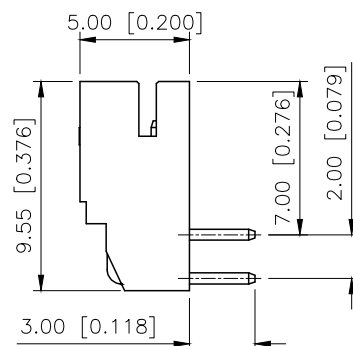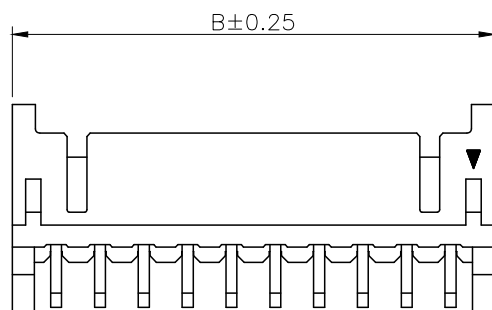

poles	Dimensions(mm)			poles	Dimensions(mm)			Poles	Dimensions(mm)		
	A	B	C		A	B	C		A	B	C
2x02	2.00	6.00	4.80	2x09	16.00	20.00	18.80	2x16	30.00	34.00	32.80
2x03	4.00	8.00	6.80	2x10	18.00	22.00	20.80	2x17	32.00	36.00	34.80
2x04	6.00	10.00	8.80	2x11	20.00	24.00	22.80	2x18	34.00	38.00	36.80
2x05	8.00	12.00	10.80	2x12	22.00	26.00	24.80	2x19	36.00	40.00	38.80
2x06	10.00	14.00	12.80	2x13	24.00	28.00	26.80	2x20	38.00	42.00	40.80
2x07	12.00	16.00	14.80	2x14	26.00	30.00	28.80	2x21	40.00	44.00	42.80
2x08	14.00	18.00	16.80	2x15	28.00	32.00	30.80	2x22	42.00	46.00	44.80

X2026WR-2xXX-NOV01	PA66 UL 94V-0	Brass	Gold-Flash	X2026H
X2026WR-2xXX-N0SN			Tin-Plated	
PART NO	Material	Material(pin)	Material(pin)	Suitable XKB Terminal

AuGLAR	$\pm 5^\circ$
X.	± 0.40
X.x	± 0.30
X.xx	± 0.20
X.xxx	± 0.15
UNSPECIFIED TOLERANCES	

XKLB 星城
Connection

DESIGN	阿树	VIEW: 	MODEL TYPE: 2.00mm Crimp Style Connector
CHECKED		UNIT: mm/in	PART NO.: X2026WR-2xXX-N0SN
APPROVED		SIZE: A4	DWG NO.:

SCALE	PAGE	REVISION
N/A	1/1	A1