



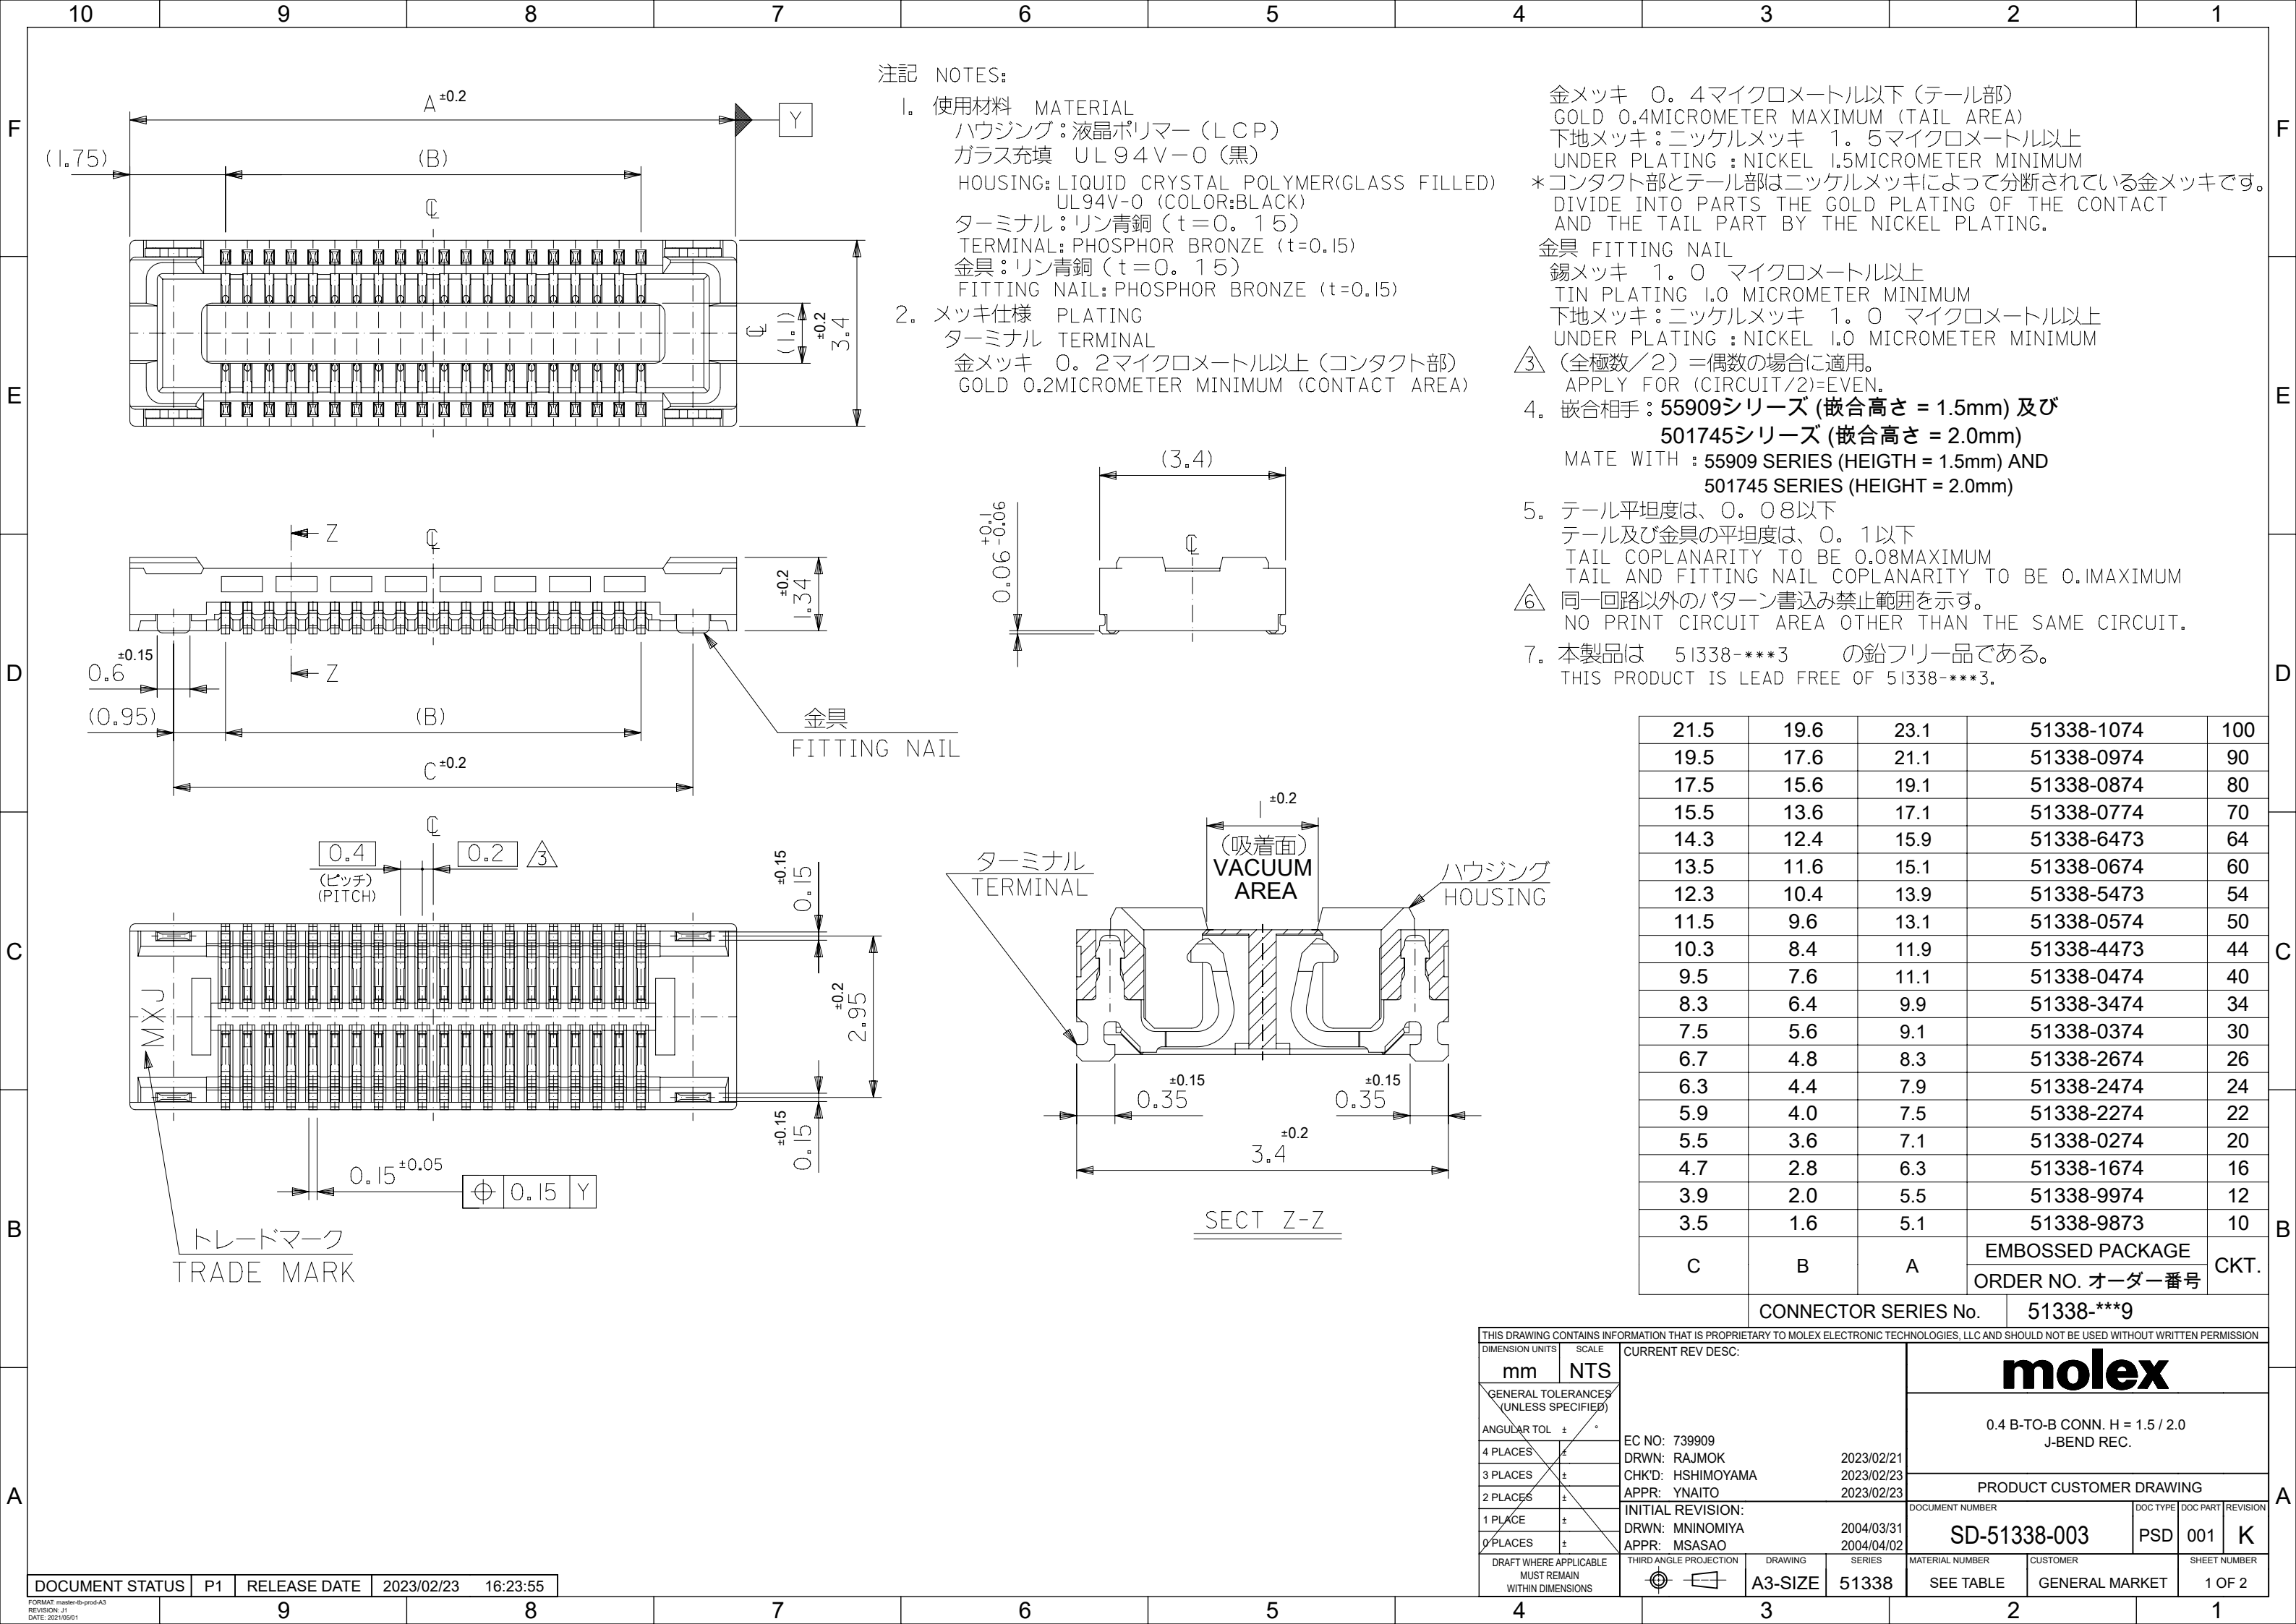

MATE : 51338 WITH 55909


MATE : 51338 WITH 501745

嵌合相手
MATE WITH
55909-****

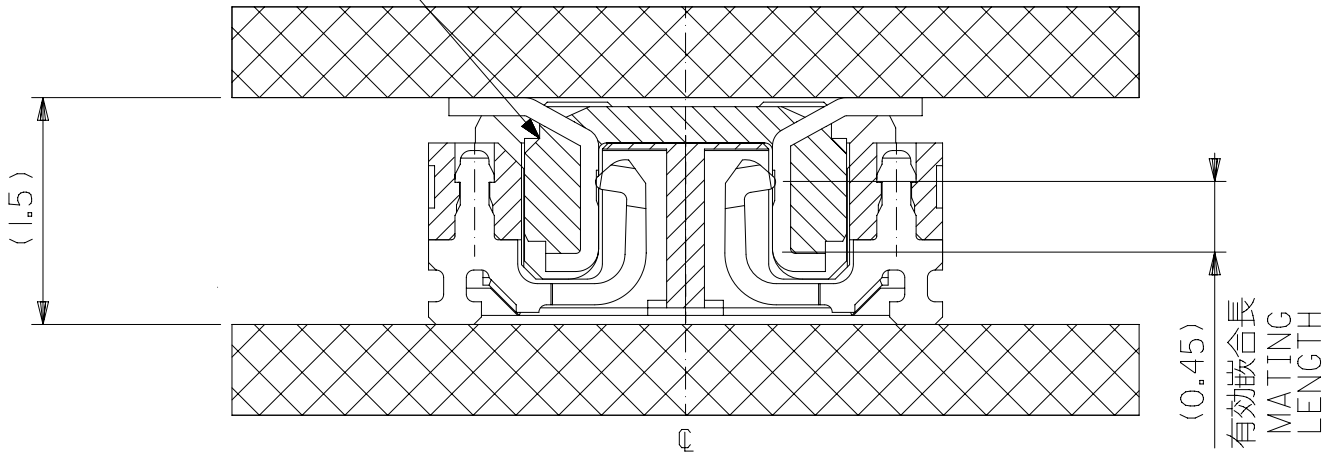


嵌合断面図 (参考)
MATED DRAWING (REFERENCE)

嵌合相手
MATE WITH
501745-0**1

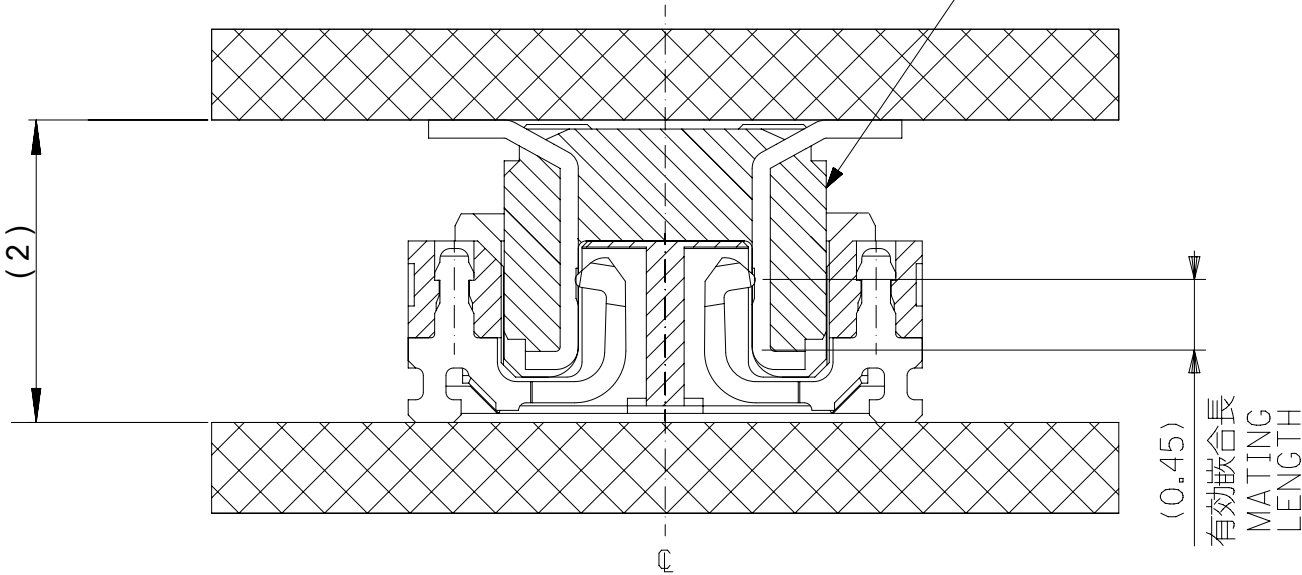

嵌合断面図 (参考)
MATED DRAWING (REFERENCE)

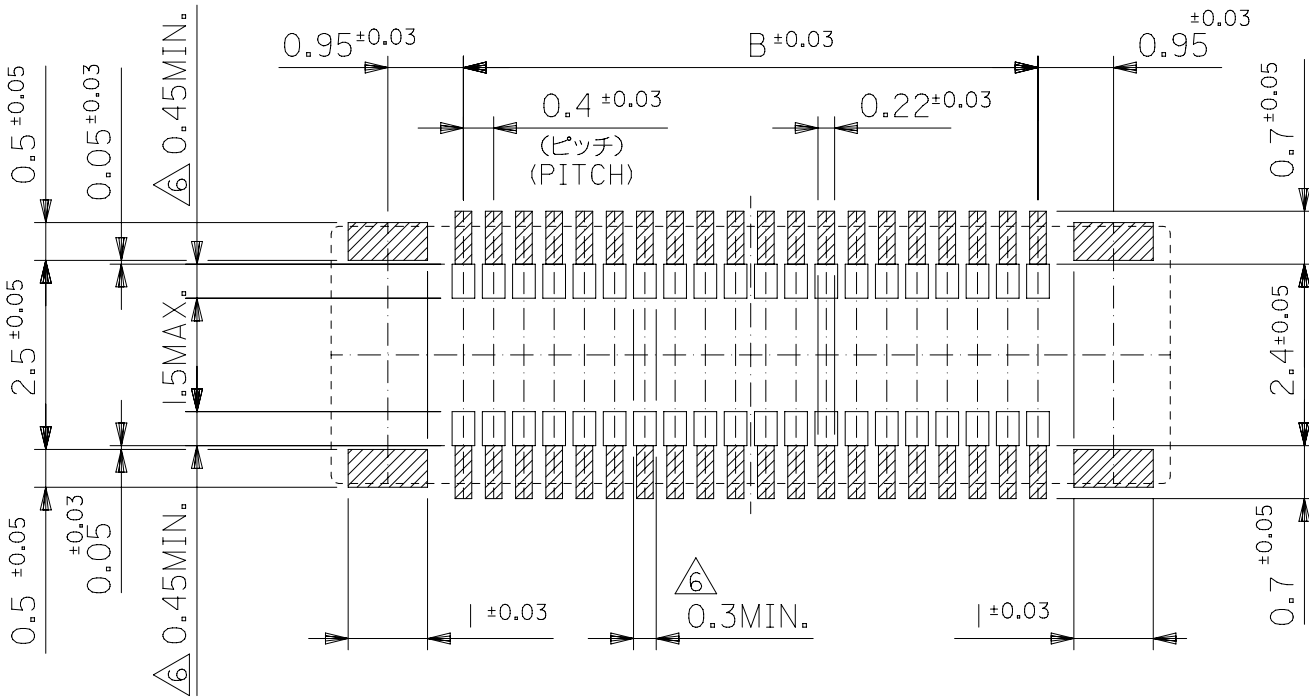


参考基板レイアウト (マウント面)
P.C.BOARD PATTERN DIMENSION. (REFERENCE)
(MOUNTING AREA)


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION											
DIMENSION UNITS		SCALE		CURRENT REV DESC:				molex			
mm		NTS									
GENERAL TOLERANCES (UNLESS SPECIFIED)				0.4 B-TO-B CONN. H = 1.5 / 2.0 J-BEND REC.							
ANGULAR TOL ± °											
4 PLACES		±		EC NO: 739909				PRODUCT CUSTOMER DRAWING			
3 PLACES		±		DRWN: RAJMOK 2023/02/21							
2 PLACES		±		CHK'D: HSHIMOYAMA 2023/02/23							
1 PLACE		±		APPR: YNAITO 2023/02/23				DOCUMENT NUMBER SD-51338-003			
0 PLACES		±		INITIAL REVISION:						DOC TYPE	
				DRWN: MNINOMIYA 2004/03/31						DOC PART	
				APPR: MSASAO 2004/04/02				REVISION			
				THIRD ANGLE PROJECTION		DRAWING		SHEET NUMBER			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				A3-SIZE		SERIES		SEE SHEET-1			
				51338		GENERAL MARKET					
						2 OF 2					

NOTES

1. 製品詳細寸法については製品単体図面を参照下さい。
DETAIL DIMENSIONS, SEE PRODUCT DRAWING.
2. 梱包数量：2500個／リール
NUMBER OF CONNECTORS：2500PCS/REEL
3. リードテープ長さ LEAD TAPE LENGTH

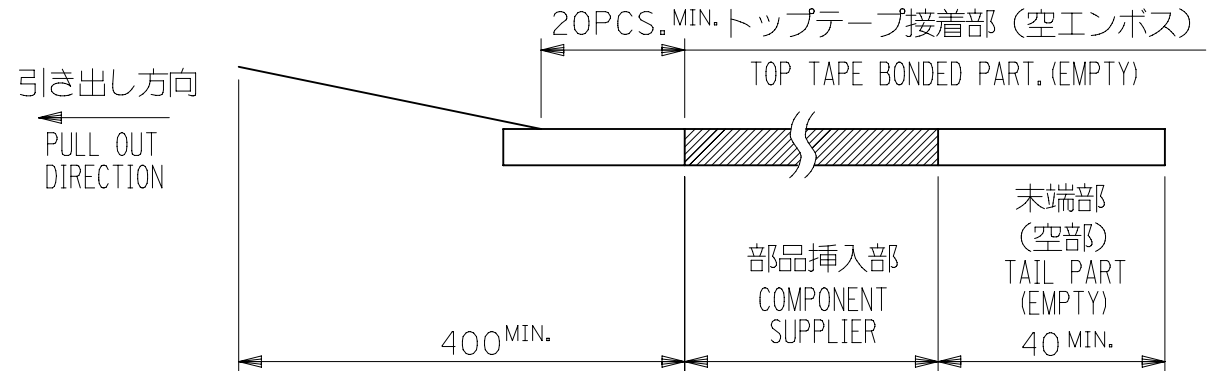


4. トップテープの剥離強度： 0.1N ～ 1.3N{10gf ～ 130gf}
(剥離方向は下図参照)
- 尚、本規格値は出荷時に適用。(但し、輸送時に剥離が発生しないこと。)
PEELING OFF FORCE OF TOP TAPE：0.1N ～ 1.3N{10gf ～ 130gf}
(PEELING DIRECTION AS SHOWN IN FOLLOWING FIG.)
THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT.
PEEL OFF SHOULD NOT BE ALLOWED , DURING TRANSPORTATION.

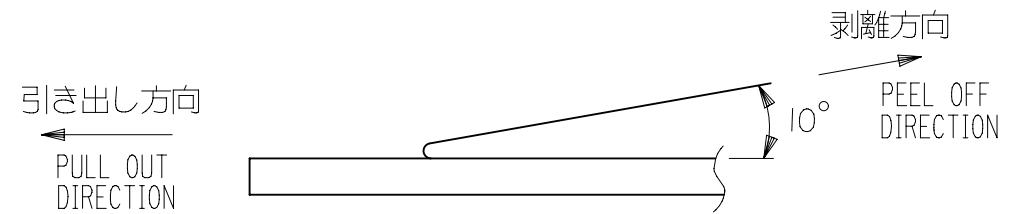


5. 材料
キャリアテープ (CARRIER TAPE)：ポリスチレン (PS)
トップテープ (TOPTAPE)：PET
リール (REEL)：ポリスチレン (PS) <リサイクル材を含む>
POLYSTYRENE (PS) <RECYCLE MATERIAL CONTAINED>
6. 本製品は 51338-***4 の鉛フリー品である。
THIS PRODUCT IS LEAD FREE OF 51338-***4.

7. ELV 及び RoHS 適合品。
ELV AND RoHS COMPLIANT.

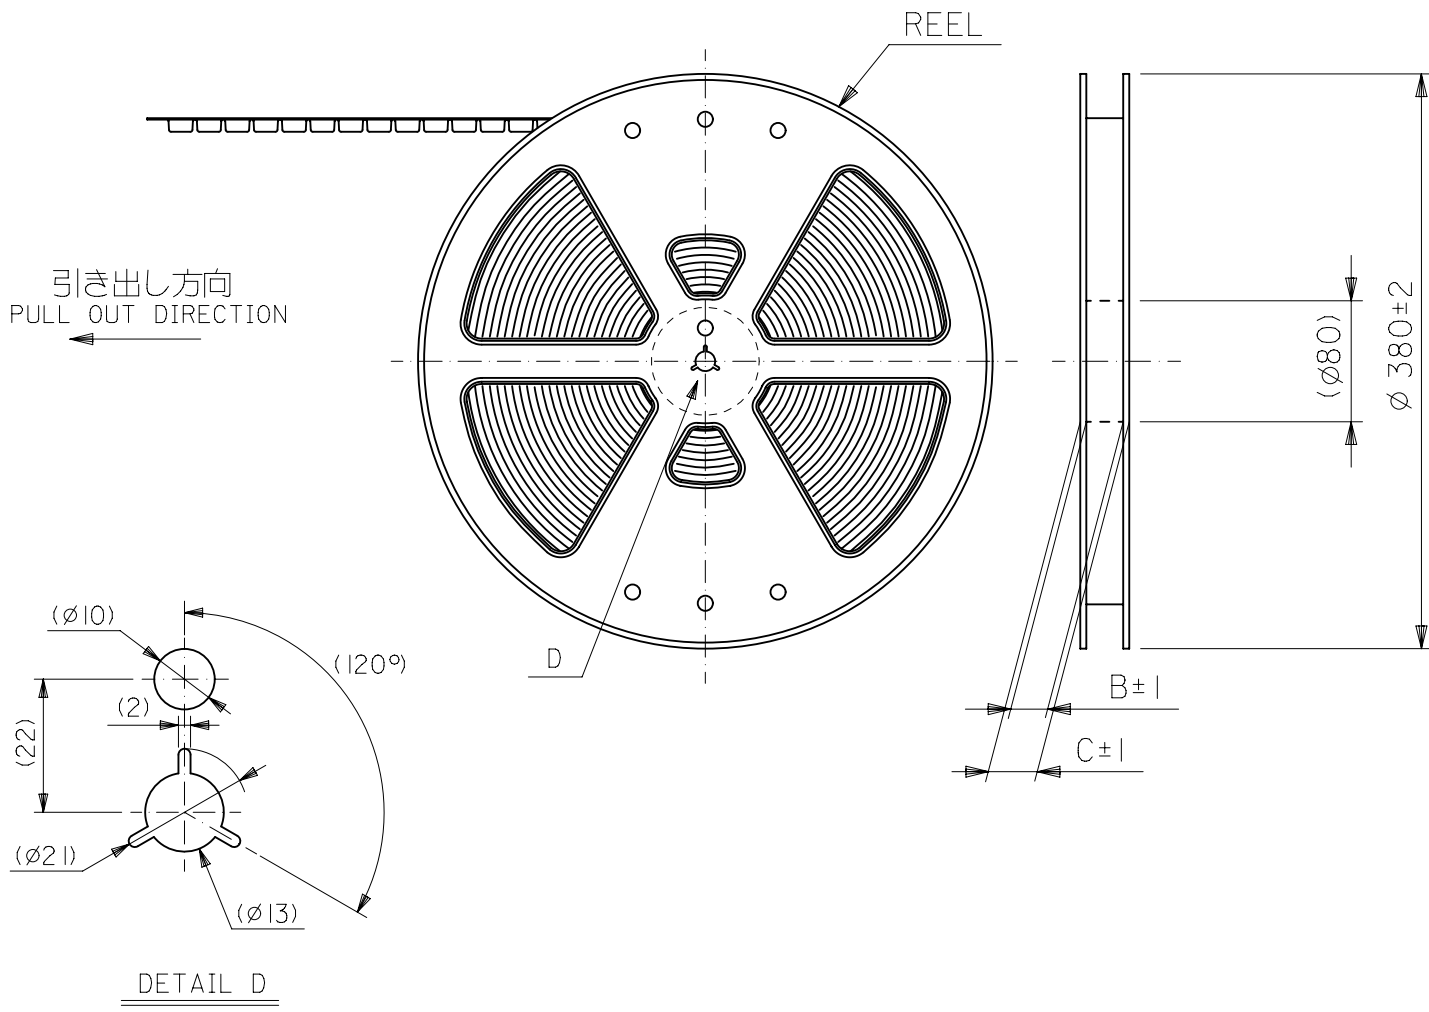

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION															
DIMENSION UNITS		SCALE		CURRENT REV DESC:				molex 0.4 B-TO-B CONN. H = 1.5 / 2.0 J-BEND REC.							
mm		NTS													
GENERAL TOLERANCES (UNLESS SPECIFIED) ANGULAR TOL ± ° 4 PLACES ± 3 PLACES ± 2 PLACES ± 1 PLACE ± 0 PLACES ±				EC NO: 638555				PRODUCT CUSTOMER DRAWING							
				DRWN: BKBAE 2020/05/15											
				CHK'D: SHCHU 2020/05/29											
				APPR: SHCHU 2020/06/01				DOCUMENT NUMBER		DOC TYPE		DOC PART		REVISION	
				INITIAL REVISION:				SD-51338-004				PSD		001	
DRWN: MNINOMIYA 2004/03/31				2004/03/31				MATERIAL NUMBER		CUSTOMER		SHEET NUMBER			
APPR: MSASAO 2004/04/02				2004/04/02											
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING		SERIES		SEE CHART		GENERAL MARKET		1 OF 4	
						A3-SIZE		51338							

DOCUMENT STATUS	P1	RELEASE DATE	2020/06/01	01:17:14
-----------------	----	--------------	------------	----------

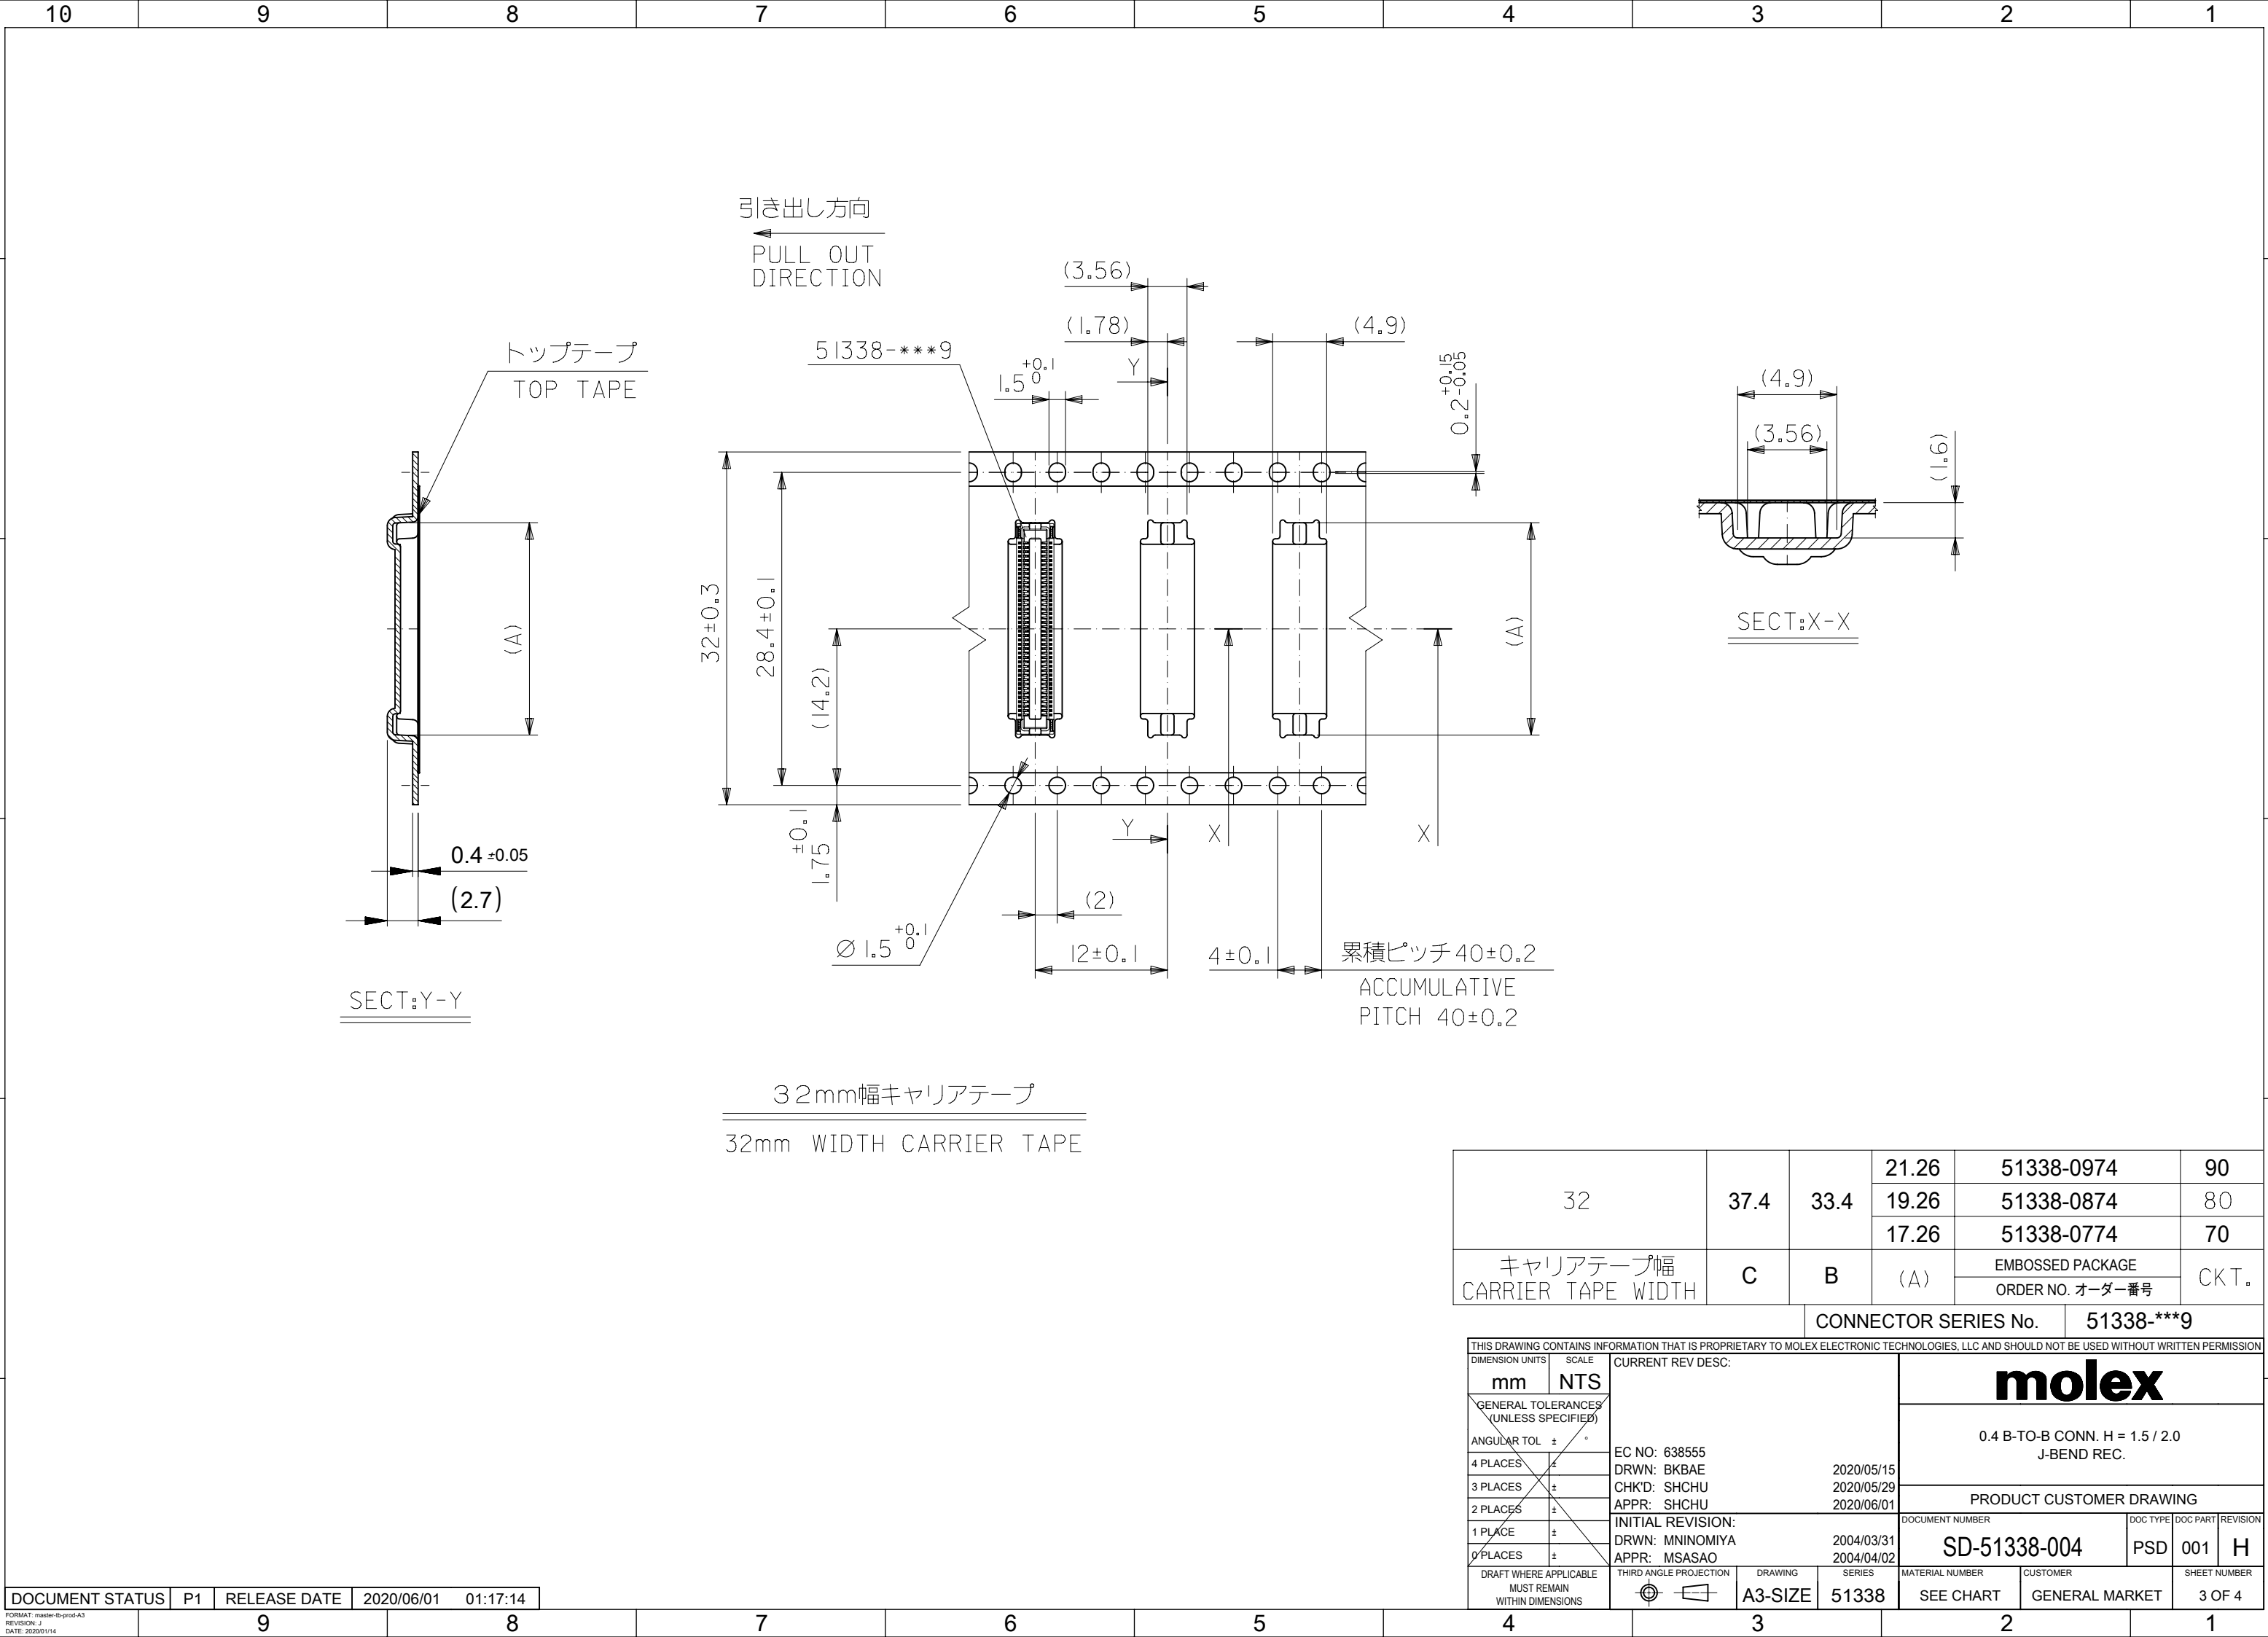


32	37.4	33.4	21.26	51338-0974	90
			19.26	51338-0874	80
			17.26	51338-0774	70
キャリアテープ幅 CARRIER TAPE WIDTH	C	B	(A)	EMBOSSED PACKAGE ORDER NO. オーダー番号	CKT.

CONNECTOR SERIES No. 51338-***9

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
CURRENT REV DESC:		molex							
0.4 B-TO-B CONN. H = 1.5 / 2.0 J-BEND REC.									
PRODUCT CUSTOMER DRAWING									
DOCUMENT NUMBER		DOC TYPE		DOC PART		REVISION			
SD-51338-004		PSD		001		H			
SHEET NUMBER									
3 OF 4									

DIMENSION UNITS		SCALE		CURRENT REV DESC:		molex			
mm		NTS							
GENERAL TOLERANCES (UNLESS SPECIFIED)									
ANGULAR TOL ± °									
4 PLACES		±							
3 PLACES		±							
2 PLACES		±		EC NO: 638555					
1 PLACE		±		DRWN: BKBAE		2020/05/15			
0 PLACES		±		CHK'D: SHCHU		2020/05/29			
				APPR: SHCHU		2020/06/01			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING		SERIES	
				A3-SIZE		51338			
				MATERIAL NUMBER		CUSTOMER			
				SEE CHART		GENERAL MARKET			

DOCUMENT STATUS	P1	RELEASE DATE	2020/06/01	01:17:14
-----------------	----	--------------	------------	----------

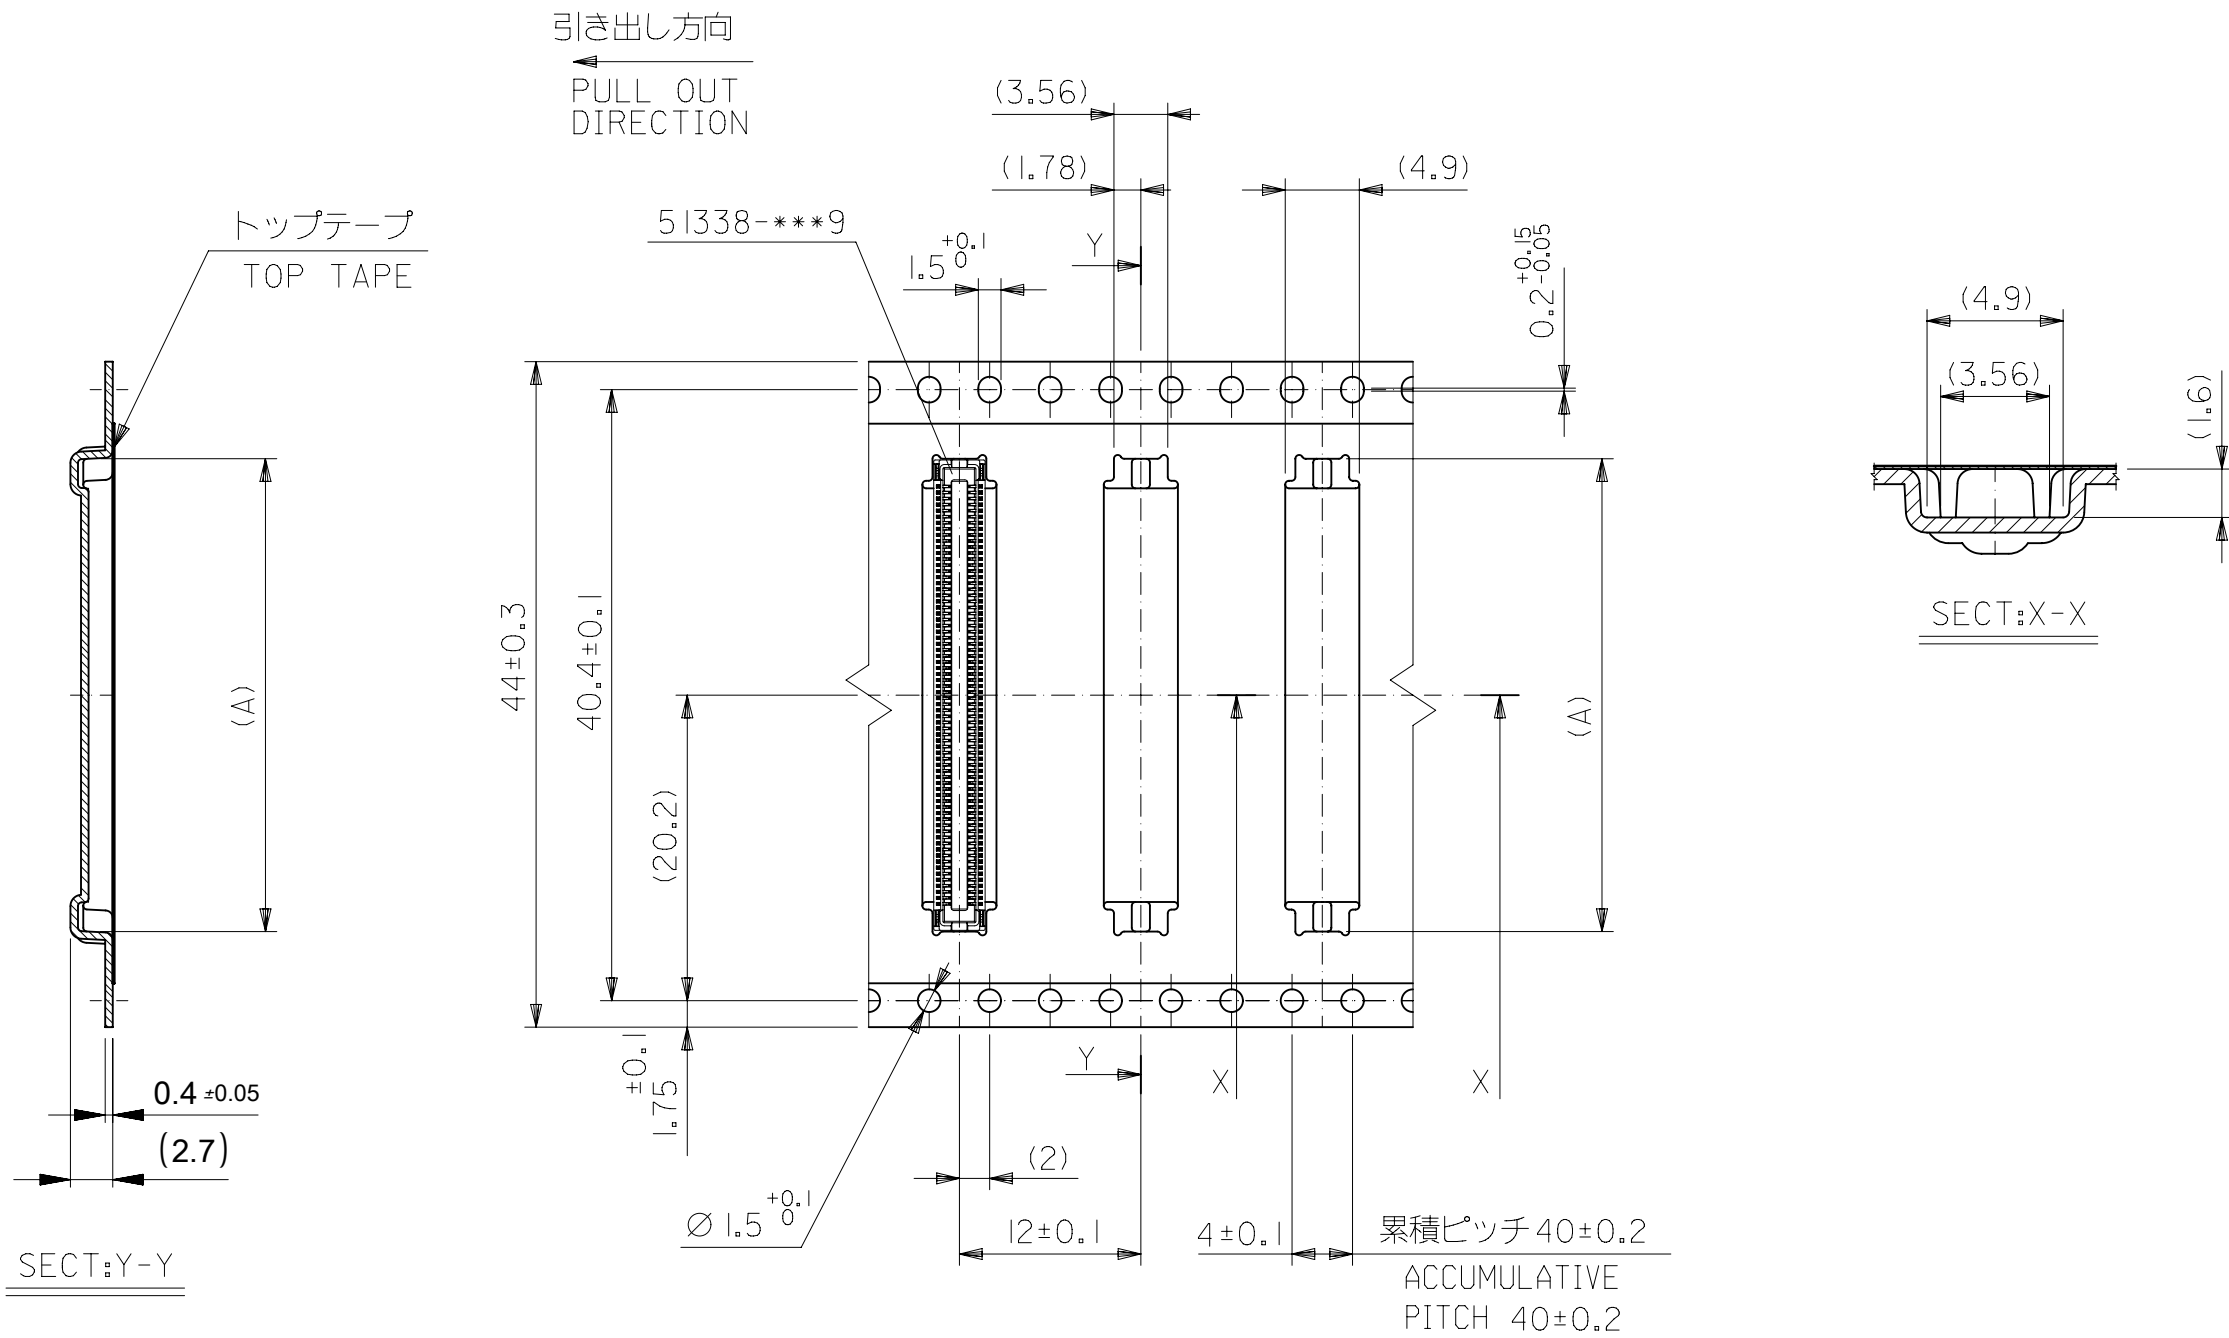

44mm幅キャリアテープ
44mm WIDTH CARRIER TAPE

44	49.4	45.4	23.26	51338-1074	100
キャリアテープ幅 CARRIER TAPE WIDTH	C	B	(A)	EMBOSSED PACKAGE	CKT.
				ORDER NO. オーダー番号	

CONNECTOR SERIES No. 51338-***9

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
DIMENSION UNITS		SCALE		CURRENT REV DESC:			molex 0.4 B-TO-B CONN. H = 1.5 / 2.0 J-BEND REC.		
mm		NTS							
GENERAL TOLERANCES (UNLESS SPECIFIED)							PRODUCT CUSTOMER DRAWING		
ANGULAR TOL ± °									
4 PLACES ± °									
3 PLACES ± °									
2 PLACES ± °				EC NO: 638555 DRWN: BKBAE					