


1. Material:
 Contacts: Phosphor Bronze
 Insulator: PBT+30%G.F UL 94V-0 Black
 Shell: Brass
2. Mechanical:
 Mating Force: 45N max.
 Withdrawal Force: 7N min.
 Durability: 500 cycles min.
3. Electrical:
 Ⓞ Current-max[amps] 1.0A
 voltage-max[volts] 30V
 Withstanding Voltage 750V AC
 Contact Resistance[ohms] 30 milliohms max
 Insulation Resistance[ohms] 1000 Megohms min
4. Plating:
 Contacts: Full Gold Flash
5. Environmental
 Temperature Range -25°C~ +85°C
- ⑦ 6. Packing: Tray



ROHS compliant
 Unit: mm

Scale	Free	⑧ Update to correct pin numbers	21.08.2015	Amy			Customer-No.	
TOLERANCE	⑦ Update	⑦ Update	07.02.2013	Amy	Drawn	10.06.2002	A. Menk	
X.X	±0.30	⑥ Update	12.12.2012	Amy	Approved	21.08.2015	Amy	
X.XX	±0.20	⑤ Change the manufacture plant	25.11.2010	Alex				ASSMANN WSW-No. A-DIO-TOP/08
X.XXX	±0.10	④ Update	15.07.2009	Rate				Drawing-No. ASS 1294 CO
DIM	TOL	③ Tolerance added	20.08.2003	A. Menk				Replace rev08
X.°	±5°	② Modification						Sheet
X.X°	±3°							
Angle	TOL							

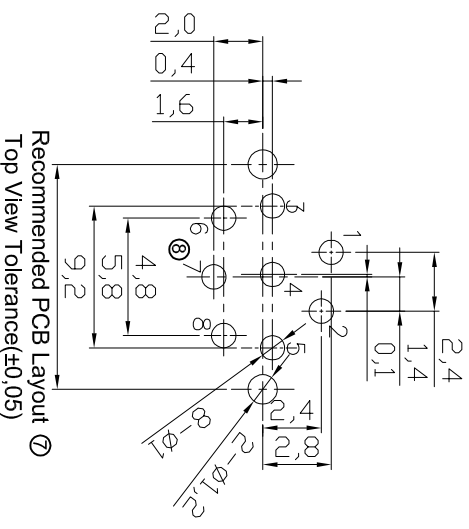

1	2	3	4	5	6	7	
1	2	3	4	5	6	7	
H	G	F	E	D	C	B	A