





** Not all features are shown in this drawing. For more detailed information, please contact your Fair-Rite representative.

UNCONTROLLED ~CATALOG~ DRAWING

SIZE	PART NO.	REV.
B	2752065447	~

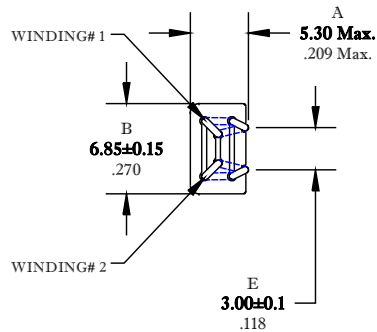

IMPEDANCE VALUES ARE MEASURED BETWEEN TERMINALS 1 AND 4, OR 2 AND 3, ON A HP4191A, USING A 16092A FIXTURE, WITH FIXTURE COMPENSATION

Impedance (Ohms)		
100 MHz	250 MHz	500 MHz
185 Min.	305 Min.	360 Min.

DIMENSIONS
BOLD NUMBERS ARE IN MILLIMETERS
 LIGHT NUMBERS ARE IN INCHES

NOTES:

- PARTS MEETS FAIR-RITE PRODUCTS VISUAL INSPECTION CRITERIA FOR GENERIC SURFACE MOUNT BEADS.
- PARTS MEET FAIR-RITE PRODUCTS SOP# ELC-27, FOR THERMAL SHOCK RESISTANCE.
- WIRE MEETS SOLDERABILITY SPECIFICATION WHEN TESTED PER SOP# ELC-57.
- COPLANARITY BETWEEN LEADS: 0.15mm [.006"] Max.
- PARTS ARE SUPPLIED TAPED AND REELED PER IEC 60286-3 AND EIA 481 STANDARDS.
- PARTS ARE TO BE 100% TESTED & 100% CERTIFIED FOR BREAKDOWN VOLTAGE BETWEEN CONDUCTORS: 1000 Vdc.

FR# 52

FAIR-RITE PRODUCTS CORP.				
TITLE MULTI-TURN COMMON MODE BEAD				
DRAWN BY D. FOOTE	DATE 9/18/2019	SIZE B	PART NO. 2752065447	REV. ~
CHKD BY				
APPRVD BY		SCALE: NONE	SHEET 1 OF 1	