


- NOTES:
- MATERIAL:
HOUSING: HIGH TEMPERATURE THERMOPLASTIC, UL94-V0 BLACK.
TERMINAL: COPPER ALLOY
 - TERMINAL FINISH:
SELECTED GOLD ON CONTACT AREA
GOLD FLASH ON SOLDER TAILS.
 - PRODUCT SPEC: GS-12-629
 - PACKAGE SPEC: GS-14-1517
 - THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A CONVECTION INFRA-RED OR VAPOR PHASE REFLOW OVEN.
 - MATING SIDE LENGTH: 2.5mm MIN.
 - PRODUCT NUMBERING:
20021814 -XXX XX X X LF

- LEAD FREE
- PLATING
- 1: GOLD FLASH ON CONTACT AREA
- 4: 10u" GOLD ON CONTACT AREA
- 8: 30u" GOLD ON CONTACT AREA
- PACKING STYLE
- T: TUBE
- PIN COUNT
- 04, 06, 08 ... 98, A0
- STACK HEIGHT "K"
- EXAMPLE: 045=4.5mm
- IN 0.5mm INCREMENT

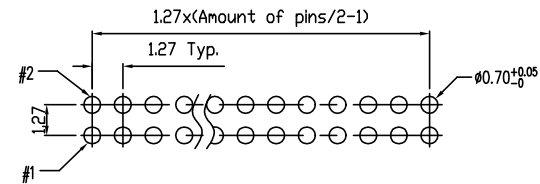

Recommended P.C.B. Layout
Layout Tolerance = ± 0.05mm

Amphenol
FCI

© 2016 AFCI

mat'l. code		surface		tolerance		projection		product family	
		ISO 1302 ✓		ISO 406 ISO		1101		MINITEK127®	
ltr		ecn no		dr		date		title	
B		ELX-N-31248		TONY		2018-09-13		1.27mm BTB STACK HEADER VT, TH	
				angles					
				linear					
				0±2°					
								mm	
								scale 1:1	
		dr		STERLING LIN		10'-5-20		dwg no	
		eng		STERLING LIN		10'-5-20		sheet 1 of 1	
		chr		STERLING LIN		10'-5-20		size	
		app		GARY HSIEH		10'-5-20		20021814	
								A3	
								type Product Customer Drawing	
sheet		revision		B					
index		sheet		1					

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)

[20021814-09050T1LF](#) [20021814-09506T4LF](#) [20021814-10020T1LF](#) [20021814-09580T4LF](#) [20021814-09512T4LF](#)
[20021814-09518T4LF](#) [20021814-10050T1LF](#) [20021814-09558T4LF](#) [20021814-10016T4LF](#) [20021814-10012T4LF](#)
[20021814-10040T1LF](#) [20021814-10008T1LF](#)