
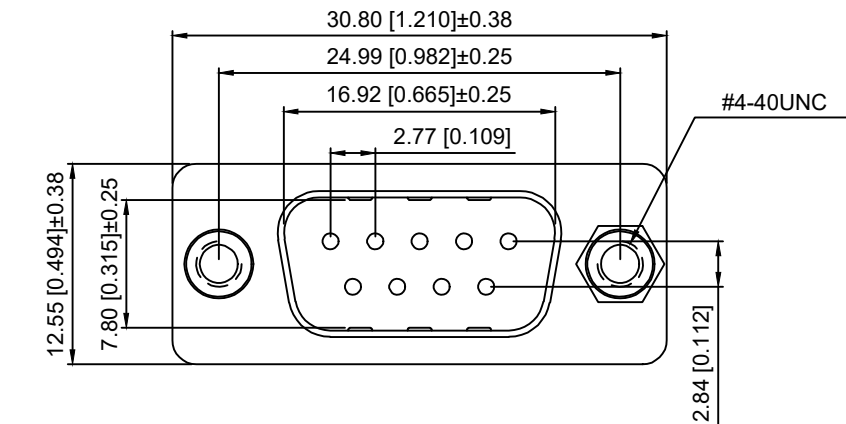
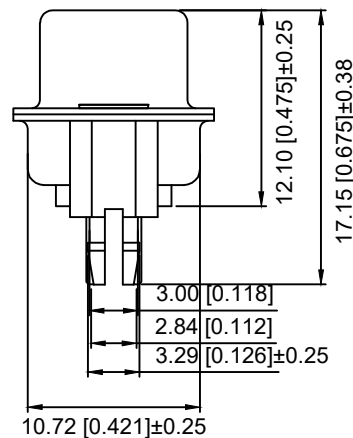


PCB LAYOUT

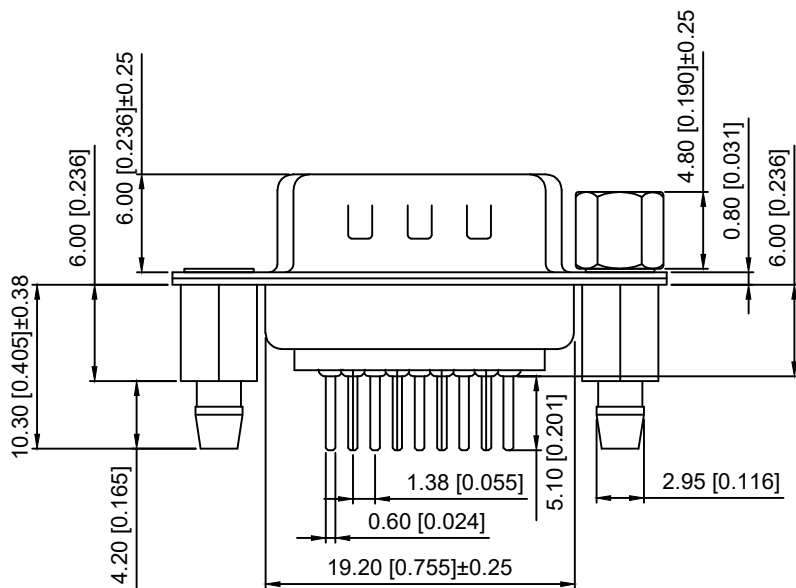

Specifications:

规格:

- 1.Voltage rating:250VAC/DC
额定电压: 250V AC/DC
 - 2.Current rating:3A AC/DC
额定电流: 3A AC/DC
 - 3.Withstanding voltage:500V AC/minute
耐受电压: ≥500V AC/分钟
 - 4.Temperature range: -25℃~+80℃
温度范围: -25℃~+80℃
 - 5.Insulation resistance:5000MΩMIN
绝缘电阻: ≥5000MΩ
 - 6.Contact resistance:30mΩMax
接触电阻: ≥30mΩ
- Material:
- 材料:
- 7.Rubber core:PBT UL94V-0
胶芯: PBT UL94V-0
 - 8.The iron shell:SPCC Terminal half-Gold 15u Matte Tin
铁壳: SPCC 半金15u雾锡
- B、成品不能有弯针，R角不一致等不良。

X02 09 W T 17 B X ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series N0.
- ② Row No.Pin No.XX-09;
- ③ Welding Board Angle :W-Male
- ④ T: Tradutional
- ⑤ Planting Category: 17-Terminal half-Gold 15u Matte Tin
- ⑥ Color:B-BLACK
- ⑦ 5:TYPE-5; 7:TYPE-7

铆合方式	TYPE-7: 后铆鱼叉	TYPE-5: 铆鱼叉锁螺丝
图示		

								DSND		SCALE: N/A	MODEL TYPE: D-USB					
ΔX						ANGLAR		±5°	DWN		VIEW: 	PART NO.: X0209WT17BX				
ΔX						4<L≤ 16		±0.3	CHKD		UNIT: mm/in	DWG NO.: X-X0209WT17BX				
ΔX						16<L≤ 63		±0.4	APPD		SIZE: A4					
MARK	DESCRIPTION				DATE	REVISED		APPROVED	L> 63	±0.5						
REVISIONS							UNSPECIFIED TOLERANCES									
www.helloxkb.com www.helloxkb.cn www.xk-dg.cn							XKB INDUSTRIAL PRECISION CO.,LIMITED							WEIGHT	SHEET	REVISION
															1/1	A0