
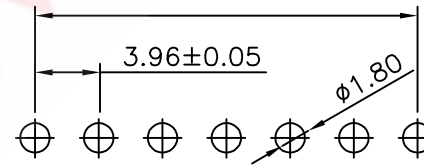
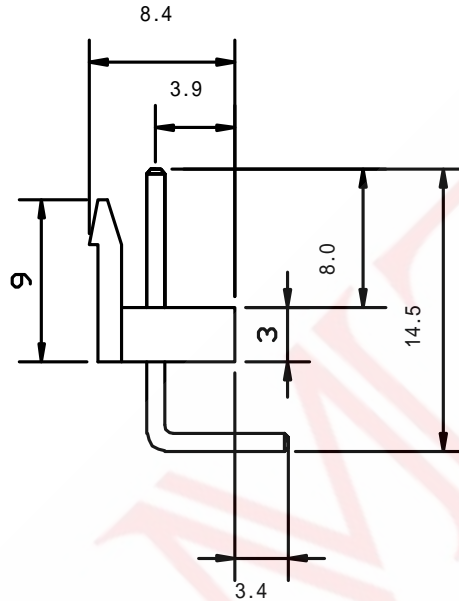


SAMZO REAC/ROHS

REV	ECN NO	DESCRIPTION	DESIGN	APPROVAL	DATE
A1	NEW	Replace frame			2013.06.21

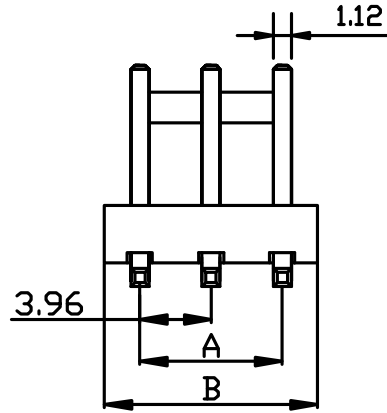

◆ SPECIFICATIONS

Current rating: 7A AC, DC
 Voltage rating: 250V AC,DC
 Temperature range: -25°C ~ +85°C
 Insulation resistance: 1000MΩ Min.
 Withstanding voltage: 1500V AC/ minute.
 Contact resistance: 20m Ω Max.


A. SERISE: 5T-VH
 B. SPACING: P-3.96mm
 C. MOUNTING: B-WD
 D. STANDARD: A-WAFER
 E:PIN: 02-2P (02-16P)
 F:CODE: 0-REGULAR
 G:L-ERECT BACK

5TPBA**0L
 A B C D E F G

PART No.	Dimension	
	A	B
02	3.96	7.92
03	7.92	11.88
04	11.88	15.84
05	15.84	19.80
06	19.80	23.76
07	23.76	27.72
08	27.72	31.68
09	31.68	35.64
10	35.64	39.60
11	39.60	43.56
12	43.56	47.52
13	47.52	51.48
14	51.48	55.44
15	55.44	59.40
16	59.40	63.36

ITEM	DESCRIPTION	MATERIAL	QTY	FINSH/COLOR					
1	针脚	黄铜	N	镀锡					
2	主体	PA66	1	XXX			GENERAL TOLERANCE		
					DESIGN	WANGGUIFA	2018.06.12	≥0~2<	±0.15
					CHECKED	ZHENGUILAN	2018.06.12	≥2~5<	±0.25
					APPROVED	LILIANJIANG	2018.06.14	≥0~2<	±0.15
								≥5	±0.35

FIRST VIEW



The copyright belongs to samzo parts [China] Co., Ltd. please use the material after samzo parts agree to authorize. The final right of interpretation belongs to samzo parts.
 WWW.KKK-JP.COM

TITLE::

VH3.96-90°-L-G

DWG NO: 5TP-P3097

PART NO: 5TP309611

MODEL NO: 5TPBA-**-0L

NAME:

WAFER CONNECTOR

SAMZO COMPONENTS
 Electronic switch and connector manufacturer

SCALE 1:1 UNIT mm