Connectors for medical applications



Product description

Snap-In Female panel mount connector, Contacts: 5, unshielded, THT, IP67


Area Part no. series 720 99 9116 490 05


Illustration

Conductor layout


Scale drawing







Contact arrangement (Plug-in side)



You can find the component part drawing and assembly instructions on the next page.

Technical data

General features

Part no.	99 9116 490 05
Connector design	Female panel mount connector
Version	Connector socket straight

Connectors for medical applications



Product description Snap-In Female panel mount connector, Contacts: 5, unshielded, THT, IP67

Area series 720
Part no. 99 9116 490 05

Connector locking system snap-in Termination THT Degree of protection IP67 Cross-sectional area max. 0.75 mm² / AWG 18 -25 °C / 85 °C Temperature range from/to > 500 Mating cycles Mechanical operation Weight (g) Customs tariff number 85369010 Country of Origin DE

Electrical parameters

Rated voltage 125 V
Rated impulse voltage 1500 V
Rated current 5.0 A
Insulation resistance ≥ $10^{10} \Omega$ Pollution degree 2
Overvoltage category II
Insulating material group II
EMC compliance unshielded

Material

Housing material PA

Contact body material PA (UL94 V-0) grey

Contact material CuSn (bronze)

Contact plating Au (gold)

REACH SVHC CAS 7439-92-1 (Lead)

SCIP number 74f34412-ddfb-4394-8ac9-335e1e2c4c37

Classifications

eCI@ss 11.1 27-44-01-02 ECIM 9.0 EC002635

Date: 10.08.2024


Connectors for medical applications



Product description Snap-In Female panel mount connector, Contacts: 5, unshielded, THT, IP67

Area series 720
Part no. 99 9116 490 05

Assembly instructions / Panel cut-out




Connectors for medical applications



Product description Snap-In Female panel mount connector, Contacts: 5, unshielded, THT, IP67

Area series 720
Part no. 99 9116 490 05

Component part drawing

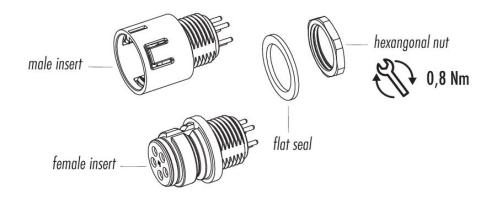

Connectors for medical applications



Product description Snap-In Female panel mount connector, Contacts: 5, unshielded, THT, IP67

Area series 720
Part no. 99 9116 490 05

Security notices

The connector must not be plugged or unplugged under load. Non-observance and improper use can result in personal injury.

The connectors have been developed for applications in plant engineering, control and electrical equipment construction. The user is responsible for checking whether the connectors can also be used in other areas of application.

Connectors which are used in circuits with voltages dangerous to the touch may only be installed and used by, or under the supervision of, persons with electrical engineering training, taking into account the applicable regulations and standards.

The user must take suitable safety precautions to ensure that the connector cannot be accidentally disconnected.

Plug connectors with enclosure protection IP67 and IP68 are not suitable for use under water. When used outdoors, the plug connectors must be protected separately against corrosion. For further information on the IP protection classes, please refer to the "Technical Information" download centre.

The plug connector is not suitable for mains voltages Please observe the pollution degree and the overvoltage category. For further information, please refer to the download center "Technical Information".