
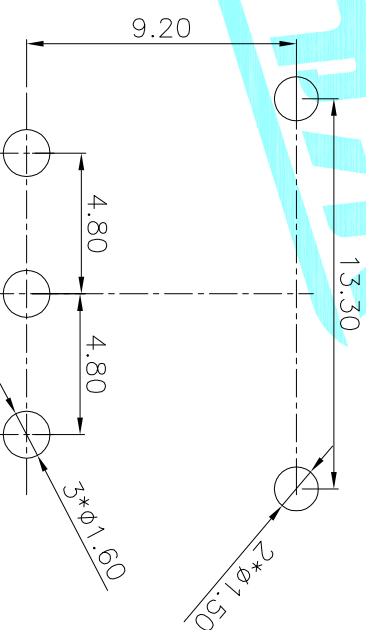


Schematic(Shorting)

- Typical Specifications
1. Rating : 3A125V AC
 2. Insulation Resistance:1,000M min
 3. Operating force:300±150gf
 4. Operating Life : 30,000 cycles

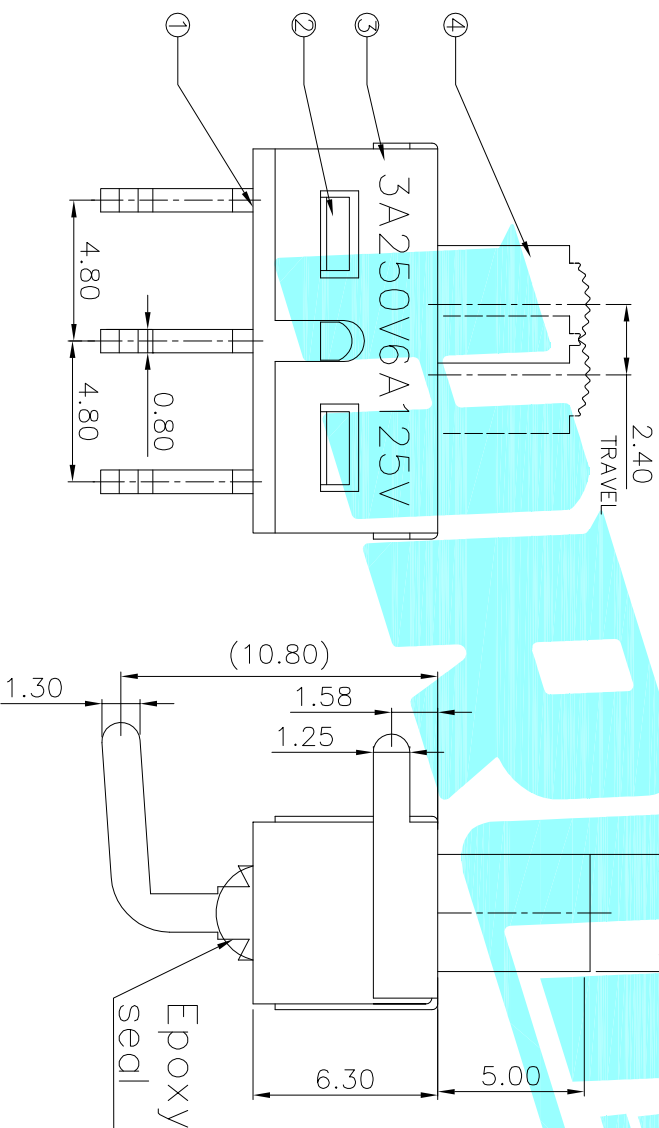

P.C.B layout

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
⑥	Spring	—	1	Stainless Steel	Natural	—
⑤	Contact Clip	—	1	PBS C5210R-EH	Ag Clad	—
④	Knob	—	1	PA	Black	—
③	Frame	—	1	SPCC	Ni Plated	—
②	Base	—	1	PA	RED	—
①	Terminal	—	3	Brass Strip	Ag Plated	—

APPROVALS	DATE	TITLE
DRAWN	JIANKUN.LIU	2015.5.25
CHECKED		
APPROVALS		

3A1250V6A125V



ELECTRONICS CO.,LTD

SLIDE SWITCHS

K3-1391B

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.	TOLERANCES ARE	30~ø1.6	±0.30	ANGLE	PART NO.	SCALE:	PROJ.	SHEET
	A		NEW				10~ø1.0	±0.20		UNIT: mm	K3-1391B	1:1	PROD.	1 OF 1
							5~ø1.0	±0.15	±2'	DRAWING NO.				