


Rating:0.5A 30V DC  
 Contact Resistance:100 mΩ Max.  
 Operating temperature:−20℃~70℃  
 Operating force:3–20N  
 Operating Life:5,000cycles

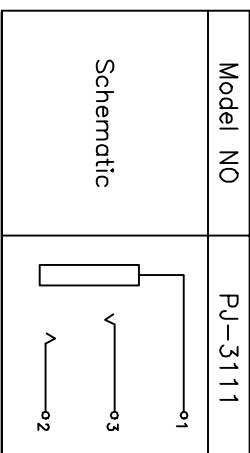

③ Axle Sleeve	—	1	Copper Alloy	Ni Plating		
② Terminal	—	—	Copper Alloy/SUS	Ag Plating		
① Housing	—	1	Nylon	Black		
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS		DATE				

DRAWN J.X.Zhang 2016/01/11  
 TITLE: PHONE JACKES  
 ELECTRONICS CO.,LTD

CHECKED  
 APPROVALS  
 PART NO. PJ-3111

TOLERANCES ARE	30 <sup>+0.15</sup> <sub>-0.10</sub>	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ.	SHEET 1 OF 1
	10 <sup>+0.15</sup> <sub>-0.10</sub>	±0.20	±2°				

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			