


P.C.B Layout (copper-sided view)

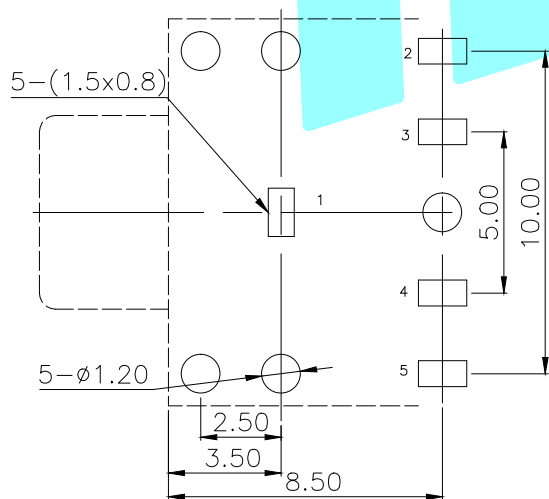

P/N	PJ-3126-A	PJ-3126-B	PJ-3126-C	PJ-3126-D
	PJ-3126A-A	PJ-3126A-B	PJ-3126A-C	PJ-3126A-D
	PJ-3126B-A	PJ-3126B-B	PJ-3126B-C	PJ-3126B-D
Schematic				

Rating:0.5A 30V DC
 Contact Resistance:100 mΩ Max.
 Operating temperature:-20℃~70℃
 Operating force:3-20N
 Operating Life:5,000cycles

②	Terminal	—	5	Phosphor bronze	Au Plating	—
①	Housing	—	1	Nylon	Black	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS		DATE		 OKHRO ELECTRONICS CO.,LTD TITLE: PHONE JACKS PART NO. PJ-3126		
DRAWN	J.X.Zhang	2013/11/11				
CHECKED						
APPROVALS						

TOLERANCES ARE	30~以上	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ:
	10~30	±0.20				
	5~10	±0.15				
	~ 5	±0.10	±2'	DRAWING NO.		SHEET 1 OF 1

ECN NO.	REV.	DATE.	NEW DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A					