



MB2M THRU MB10M

Voltage Range - 200 to 1000 Volts Current - 0.5/0.8 Ampere

SINGLE PHASE GLASS PASSIVATED BRIDGE RECTIFIERS

Features

- ◆ Ideal for printed circuit board
- ◆ Reliable low cost construction utilizing molded plastic technique
- ◆ High temperature soldering guaranteed: 260°/10 seconds at 5 lbs., (2.3kg) tension
- ◆ Small size, simple installation
- ◆ High surge current capability
- ◆ Glass passivated chip junction

Mechanical Data


Case : JEDEC MBM Molded plastic body

Terminals : Solder plated, solderable per MIL-STD-750, Method 2026

Polarity : Polarity symbol marking on body

Mounting Position : Any

Weight : 0.0044 ounce, 0.125 grams

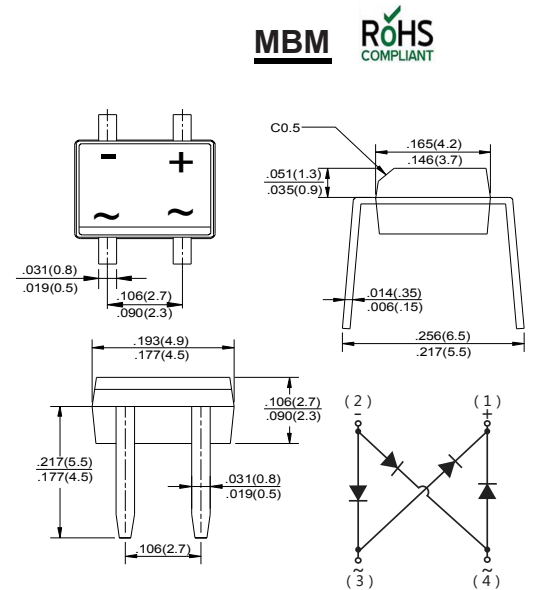

Dimensions in inches and (millimeters)

Maximum Ratings And Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

MDD Catalog Number	SYMBOLS	MDD MB2M	MDD MB4M	MDD MB6M	MDD MB8M	MDD MB10M	UNITS
Maximum repetitive peak reverse voltage	V_{RRM}	200	400	600	800	1000	VOLTS
Maximum RMS voltage	V_{RMS}	140	280	420	560	700	VOLTS
Maximum DC blocking voltage	V_{DC}	200	400	600	800	1000	VOLTS
Maximum average forward rectified current at $T_c=30^\circ\text{C}$ On glass-epoxy P.C.B. On aluminum substrate	$I_{F(AV)}$	0.5 0.8					Amps
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	30					Amps
Maximum instantaneous forward voltage drop per leg at 0.4A	V_F	1.0					Volts
Maximum DC reverse current $T_A=25^\circ\text{C}$ at rated DC blocking							



MB2M THRU MB10M

Voltage Range - 200 to 1000 Volts Current - 0.5/0.8 Ampere

Ratings And Characteristic Curves

FIG. 1- DERATING CURVE OUTPUT RECTIFIED CURRENT FOR

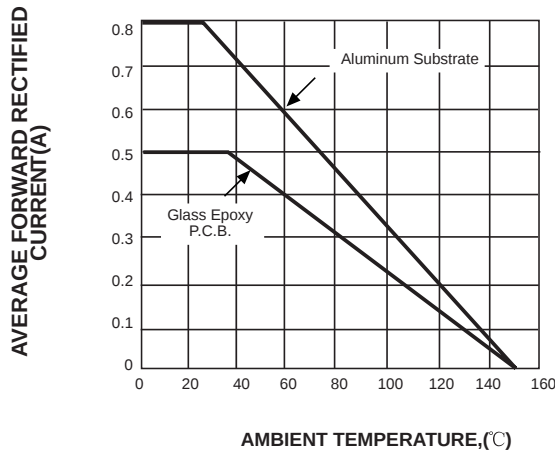


FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT PER LEG

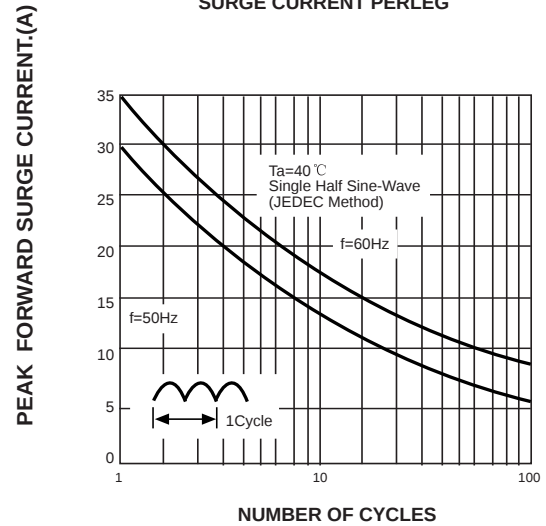


FIG. 3-TYPICAL FORWARD VOLTAGE CHARACTERISTICS PER LEG

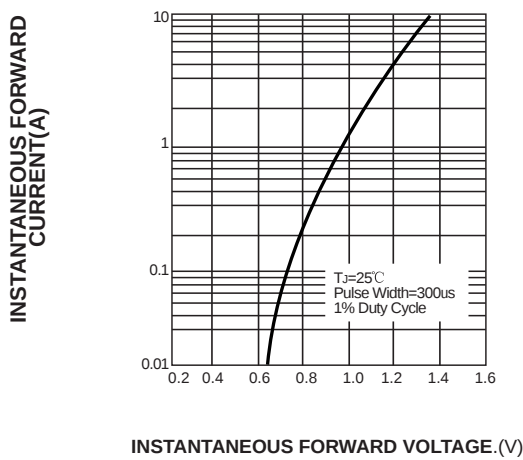


FIG. 4-TYPICAL REVERSE LEAKAGE CHARACTERISTICS PER LEG

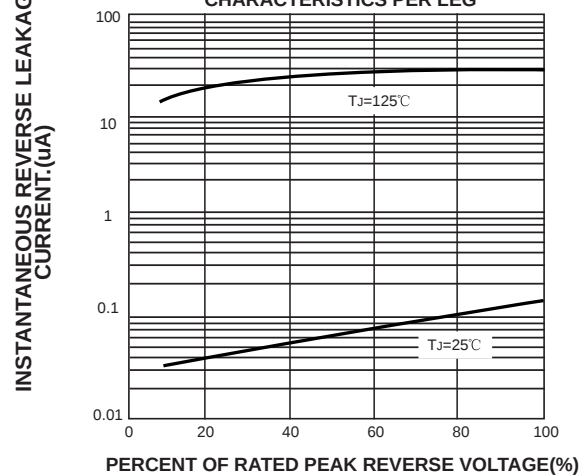


FIG. 5-TYPICAL JUNCTION CAPACITANCE PER LEG

