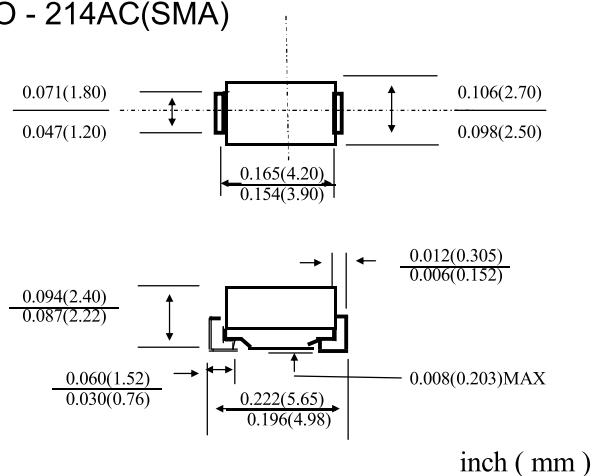


**■外形尺寸和印记 Outline Dimensions and Mark**
**DO - 214AC(SMA)**

**■特征 Features**

- $I_o$  1A
- VRM 50V-1000V
- 耐正向浪涌电流能力高
- High surge current capability

**■用途 Applications**

- 整流用 Rectifier

**■极限值 (绝对最大额定值)**
**Limiting Values (Absolute Maximum Rating)**

参数名称 Item	符号 Symbol	单位 Unit	条件 Conditions	M						
				1	2	3	4	5	6	7
反向重复峰值电压 Repetitive Peak Reverse Voltage	$V_{RRM}$	V		50	100	200	400	600	800	1000
正向平均电流 Average Forward Current	$I_{F(AV)}$	A	正弦半波 60Hz, 电阻负载, $T_a=50^\circ C$ 60Hz Half-sine wave, Resistance load, $T_a=50^\circ C$							1
正向(不重复)浪涌电流 Surge(Non-repetitive)Forward Current	$I_{FSM}$	A	正弦半波 60Hz, 一个周期, $T_a=25^\circ C$ 60Hz Half-sine wave, 1 cycle, $T_a=25^\circ C$							30
结温 Junction Temperature	$T_J$	°C								-55~+125
储存温度 Storage Temperature	$T_{STG}$	°C								-55 ~ +150

**■电特性 ( $T_a=25^\circ C$  除非另有规定)**
**Electrical Characteristics ( $T_a=25^\circ C$  Unless otherwise specified)**

参数名称 Item	符号 Symbol	单位 Unit	测试条件 Test Condition		最大值 Max
正向峰值电压 Peak Forward Voltage	$V_{FM}$	V	$I_{FM}=1.0A$		1
反向漏电流 Reverse Leakage Current	$I_{R1}$	$\mu A$	$V_{RM}=V_{RRM}$	$T_a=25^\circ C$	5
	$I_{R2}$			$T_a=100^\circ C$	50
热阻(典型) Thermal Resistance(Typical)	$R_{\theta J-A}$	°C/W	结和环境之间 B etween junction and ambient		55
	$R_{\theta J-L}$		结和引线之间 Betw en junction and lead		25

## ■ 特性曲线(典型) Characteristics(Typical)

