
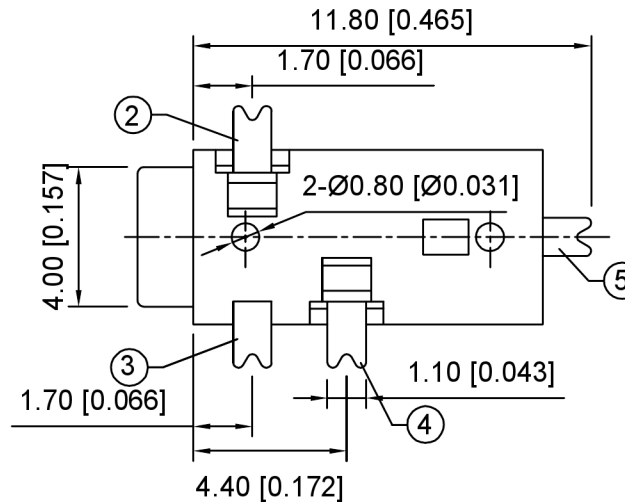
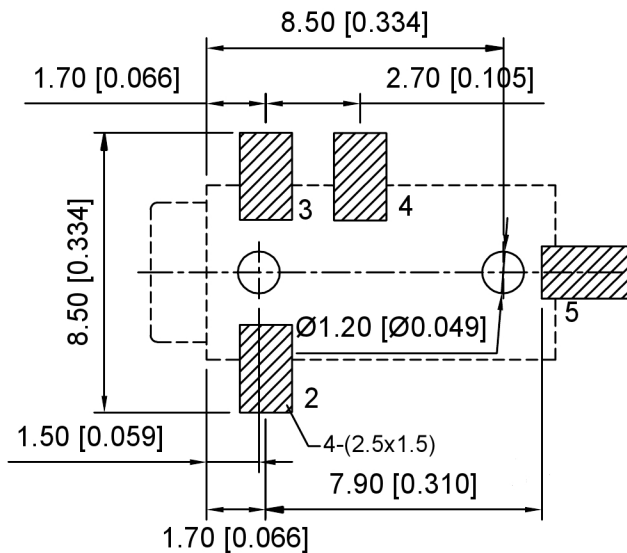


T:1.6 Dimensions of PC board holes
Tolerance :±0.1(Printed-sided view)

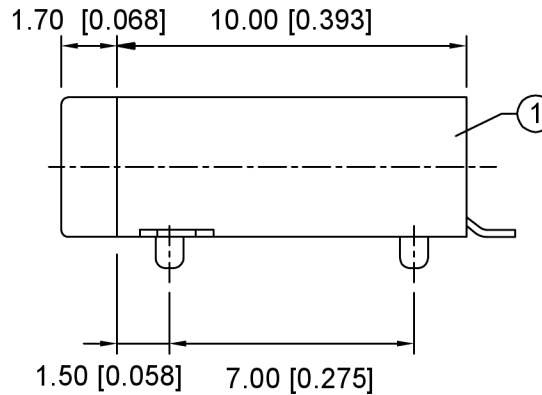


SPECIFICATION

规范

- 1.Rating:DC 12V 1.0A
额定负载: DC 12V 1.0A
- 2.Contact resistance:≤30Ω
接触电阻: ≤30Ω
- 3.Insulation resistance:> 100MΩ DC 500V
绝缘电阻: > 100MΩ DC 500V
- 4.Withstand voltage: AC 500V/min
耐压: AC 500V/min
- 5.Insertion and extraction force:5-8N
插拔力: 5-8N
- 6.Life test:10.000 cycles
寿命: 10, 000 cycles

Matching Plug

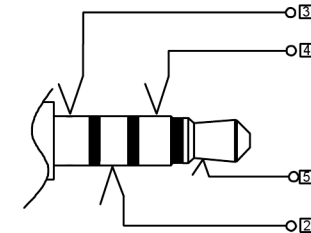

MODEL NO.	PJ-2182-SMT	PJ-2181-SMT	PJ-2180-SMT
SCHEMATIC			

序号	MATERIAL	PLATIN
5	terminal 5 Phosphor Bronze	silverir
4	terminal 4 Phosphor Bronze	silverir
3	terminal 3 Phosphor Bronze	silverir
2	terminal 2 Phosphor Bronze	silverir
1	塑料座 PBT	Black
plastic High Temp.Theroplastic		

DSND	SCALE: N/A	MODEL TYPE: 2.5 PHONE JACK
DWN	VIEW:	PART NO.: PJ-218X-SMT
CHKD	UNIT: mm/in	DWG NO.: X-PJ-218X-SMT
APPD	SIZE: A4	WEIGHT
		SHEET
		REVISIC
		1/1
		A0

广东星坤科技股份有限公司

MARK	DESCRIPTION	DATE	REVISED	APPROVED
Δx				
Δx				
Δx				

文件工程章

REVISIONS	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES

ANGULAR	±5°
L ≤ 4	±0.2
4 < L ≤ 16	±0.3
16 < L ≤ 63	±0.4
L > 63	±0.5



XKB INDUSTRIAL PRECISION CO., LIMITED