


NOTES:

1. Material:
 - 1.1 Plastic core LCP
 - 1.2 Terminal C18140 T=0.15mm Nickel base, gold plated
 - 1.3 shell SUS T=0.30mm Nickel plated on the surface
 - 1.4 shell fragment SUS T=0.15mm
2. ELECTRICAL CHARACTERISTIC
 - 2.1 Rated current 5A
 - 2.2 Contact resistance 40mΩ MAX
 - 2.3 Insulation resistance 100MΩ MIN 250V DC
 - 2.4 WITHSTANDING VOLTAGE: 100V AC
 - 2.5 245±5 5±0.5s
 - 2.6 INSERTION FORCE 2.0kgf MAX
EXTRACTION FORCE: 0.6kgf MIN
 - 2.7 Service life 10,000
 - 2.8 Operating temperature -40 +120

A1	GND	B21	GND
A2	SSTXP1	B11	SSRXP1
A3	SSTXN1	B10	SSRXN1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXN2	B3	SSTXN2
A11	SSRXP2	B2	SSTXP2
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

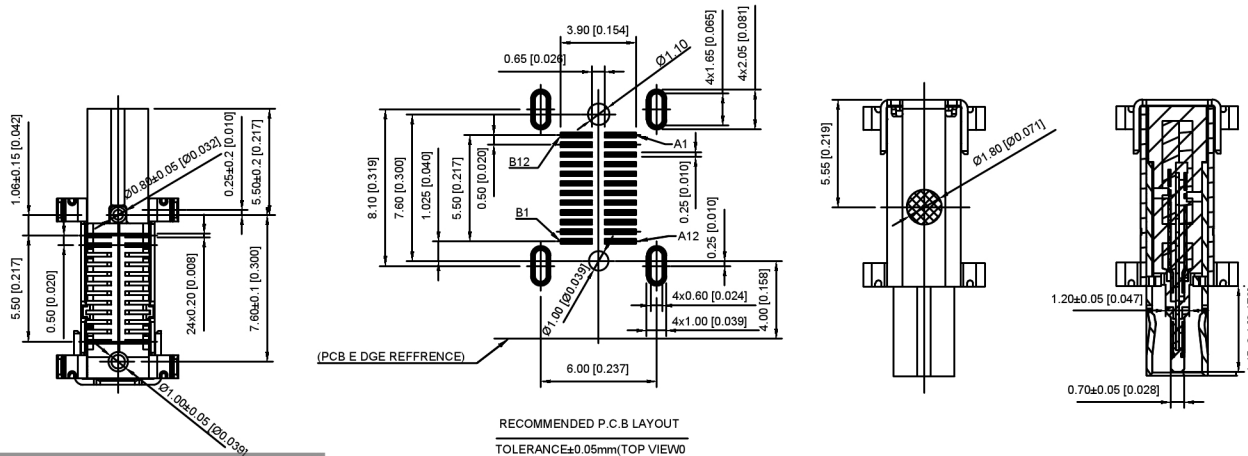

U264-24XN-4BSK00

- 01: AU 1U"Min
03: AU 3U"Min
05: AU 5U"Min
10: AU 10U"Min
15: AU 15U"Min
30: AU 30U"Min
- 1: PBT
2: PA6T
3: PA9T
4: LCP
- W: WHITE
B: BLACK

广东星坤科技股份有限公司

生	日期
效	日期
ΔX MARK	DESCRIPTION
文件工程章	DESCRIPTION

ANGLAR	±5°
L ≤ 4	±0.2
4 < L ≤ 16	±0.3
16 < L ≤ 63	±0.4
L > 63	±0.5
UNSPECIFIED TOLERANCES	



XKB INDUSTRIAL PRECISION CO., LIMITED

DSND	SCALE: N/A	MODEL TYPE: 3.1 TYPE C		
DWN	VIEW:	PART NO.: U264-24XN-4BSK00		
CHKD	UNIT: mm/in	DWG NO.: X-U264-24XN-4BSK00		
APPD	SIZE: A4	WEIGHT	SHEET	REVISION
			1/1	A0