
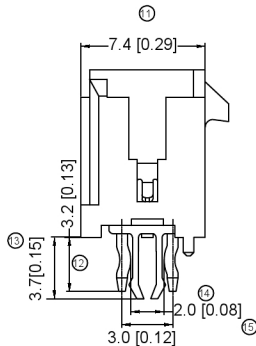


P.C.B LAYO UT

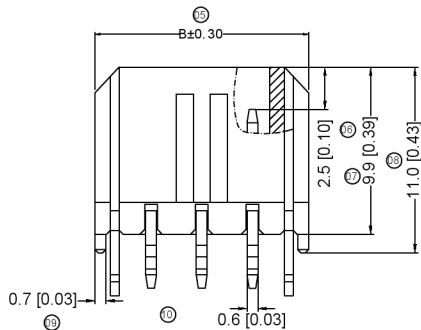

■ Specifications :

- Voltage rating: 250V AC / DC
- Current rating: 5A AC / DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥1000M Ω
- Contact resistance: ≤10mΩ
- After environmental testing : ≤20mΩ

X3025 WV-X-2*XX-C-XX-XX-XX

①Series No. ②③④⑤⑥⑦⑧⑨⑩⑪⑫⑬⑭⑮

①Series No.

②Category

③Wafer

④Welding Board Angle

V-180°

⑤Welding Way

Blank-DIP

⑥Row No.-Pin No.

2*XX-Double row

⑦Special NO.

C-The harpoon

⑧Material:

LP-LCP 94V-0 N0-PA9T 94V-0

⑨Plating Category:

yy- All Gold-Plated

⑩- Gold Flash : "02-2u", "03-3u", "05-5u"

"10-10u", "15-15u", "30-30u", "50-50u"

SN-Bright tin plating 70u"

SN1-Bright tin plating 120u"/Min.:

SW-Fog Tin plating

⑪Color:

Blank-natural color

Poles	Dimensions (mm)	
	A	B
02	-	6.65
04	3.00	9.65
06	6.00	12.65
08	9.00	15.65
10	12.00	18.65
12	15.00	21.65
14	18.00	24.65
16	21.00	27.65
18	24.00	30.65
20	27.00	33.65
22	30.00	36.65
24	33.00	39.65

X3025WV-2*XX-LPSPW	LCP UL 94V-0	Brass	Tin Plating Fog	X3025H
X3025WV-2*XX-N0SN	Nylon 9T UL 94V-0			
PART NO	Material	Material (Pin)	Finish (Pin)	Mates With:K/B Housing

DSND	DATE	SCALE: NA	MODEL TYPE:
DWN	DATE	VIEW:	X3025WV-2*XX-XXXX
CHKD	DATE	UNIT: mm/in	PART NO.: 3.00 mm Crimp Style Connectors
APPD	DATE	SIZE: A4	DWG NO.:
XKB INDUSTRIAL PRECISION CO., LIMITED			WEIGHT SHEET REVISION 1.0g 1/1 A0

广东星坤科技股份有限公司

生
發

日
期

文件工程章

REVISIONS
www.heloxkb.com

XKB	ANGLAR	±5°
L ≤ 4		±0.2
4 < L ≤ 16		±0.3
16 < L ≤ 63		±0.4
L > 63		±0.5

UNSPECIFIED TOLERANCES