


## FEATURES

For use in low voltage, high frequency inverters  
Free wheeling, and polarity protection applications.

**MARKING:** B5817W: SJ  
B5818W: SK  
B5819W: SL

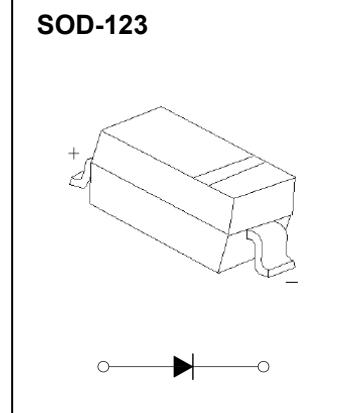





## Maximum Ratings and Electrical Characteristics, Single Diode @Ta=25°C

Parameter	Symbol	B5817W	B5818W	B5819W	Unit
Non-Repetitive Peak Reverse Voltage	V <sub>RM</sub>	20	30	40	V
Peak Repetitive Peak Reverse Voltage	V <sub>RRM</sub>				
Working Peak Reverse Voltage	V <sub>RWM</sub>	20	30	40	V
DC Blocking Voltage	V <sub>R</sub>				
RMS Reverse Voltage	V <sub>R(RMS)</sub>	14	21	28	V
Average Rectified Output Current	I <sub>O</sub>		1		A
Peak Forward Surge Current @t=8.3ms	I <sub>FSM</sub>		25		A
Repetitive Peak Forward Current	I <sub>FRM</sub>		1.5		A
Power Dissipation	P <sub>d</sub>		500		mW
Thermal Resistance Junction to Ambient	R <sub>θJA</sub>		250		°C/W
Storage Temperature	T <sub>STG</sub>		-55~+150		°C

## ELECTRICAL CHARACTERISTICS (Ta=25°C unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Max	Unit
Reverse breakdown voltage	V <sub>(BR)</sub>	I <sub>R</sub> = 1mA B5817W B5818W B5819W	20 30 40		V
Reverse voltage leakage current	I <sub>R</sub>	V <sub>R</sub> =20V V <sub>R</sub> =30V V <sub>R</sub> =40V B5817W B5818W B5819W		1	mA
Forward voltage	V <sub>F</sub>	B5817W I <sub>F</sub> =1A I <sub>F</sub> =3A B5818W I <sub>F</sub> =1A I <sub>F</sub> =3A B5819W I <sub>F</sub> =1A I <sub>F</sub> =3A		0.45 0.75 0.55 0.875 0.6 0.9	V
Diode capacitance	C <sub>D</sub>	V <sub>R</sub> =4V, f=1MHz		120	pF


## Typical Characteristics

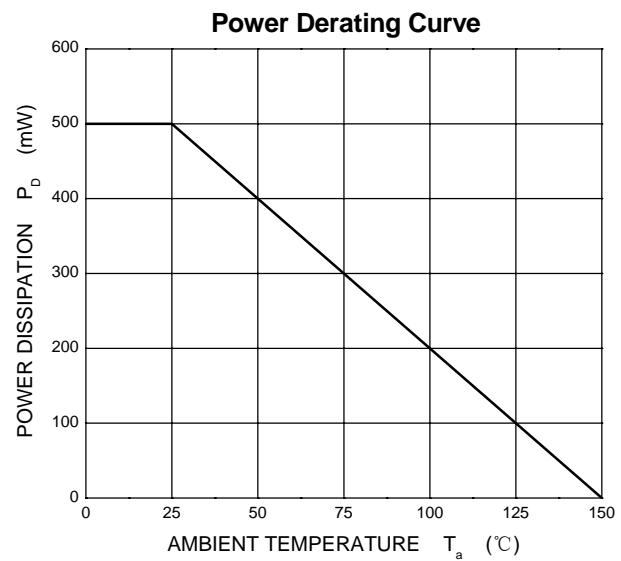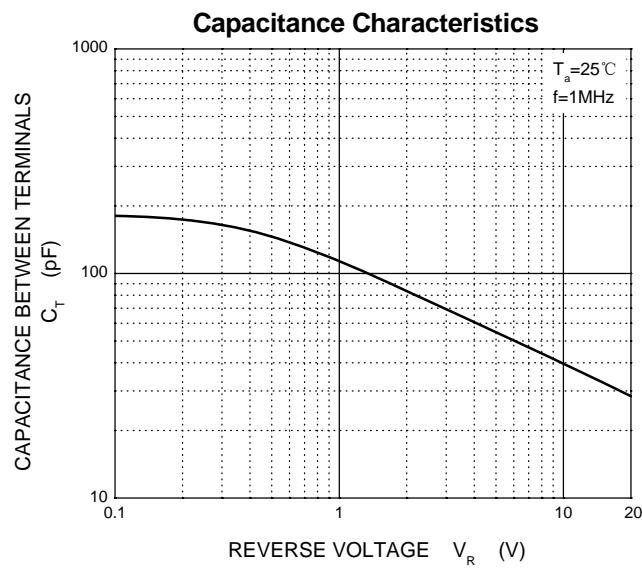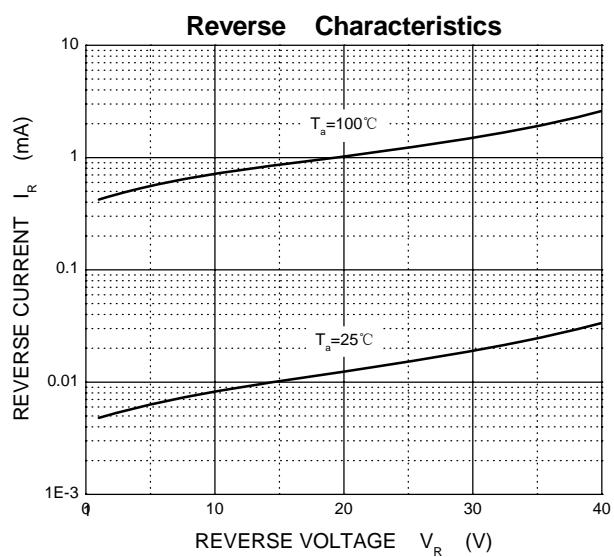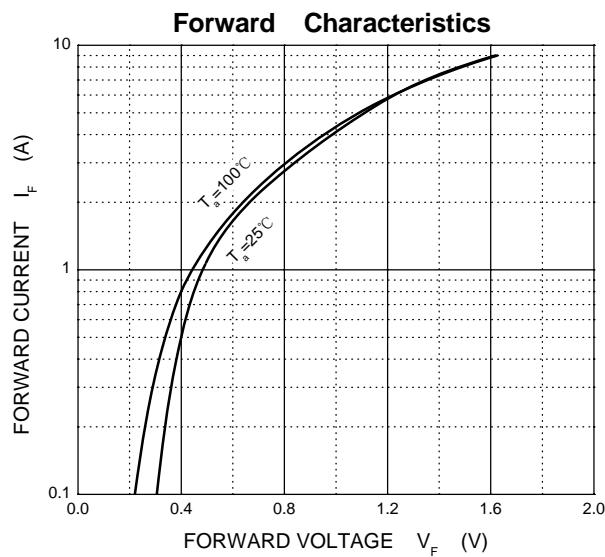

## PACKAGE OUTLINE

Plastic surface mounted package; 2 leads

SOD-123

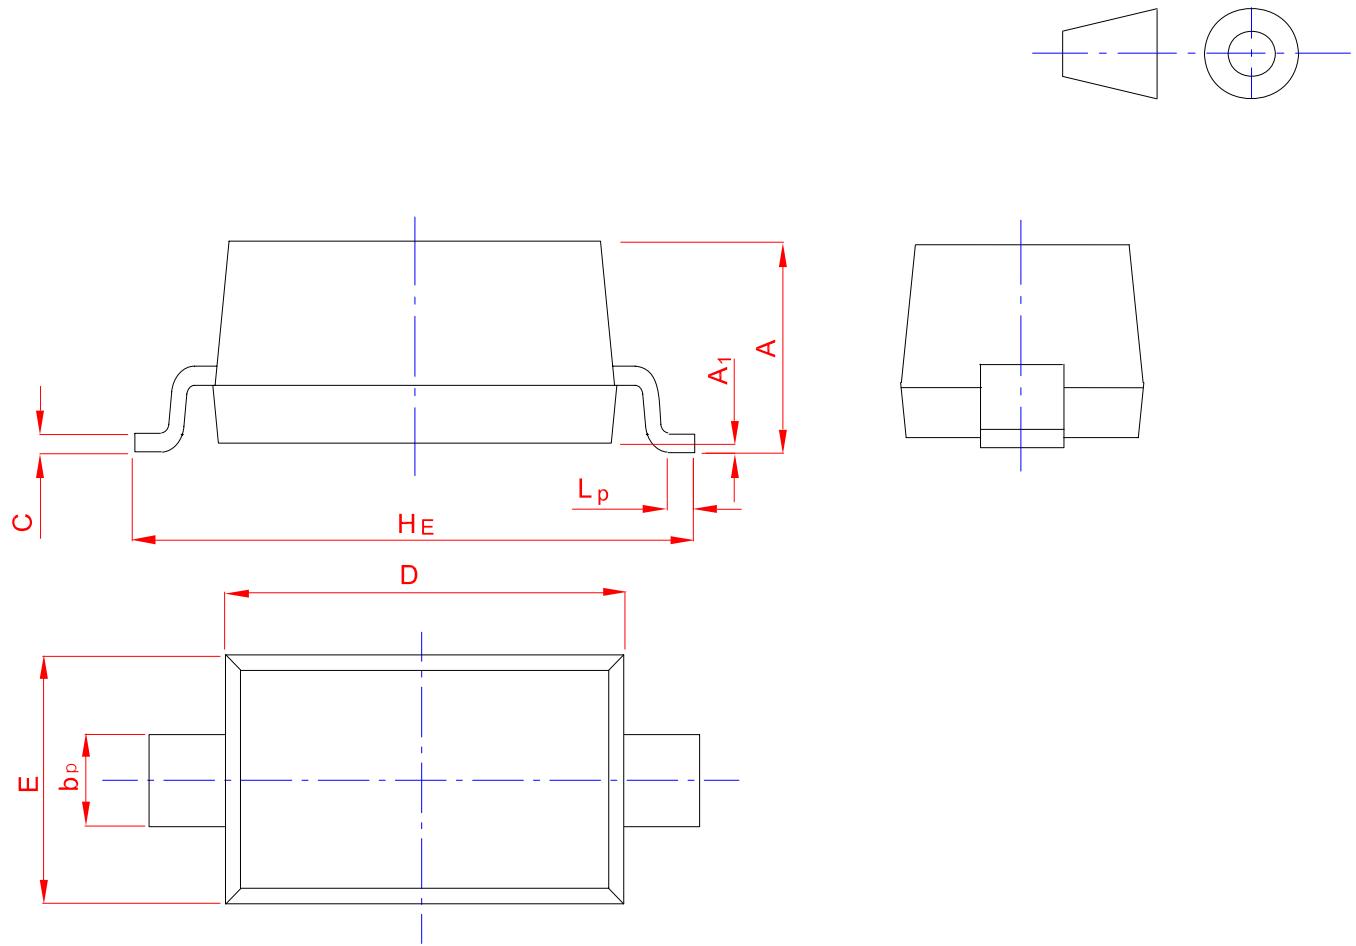

UNIT	A	b <sub>p</sub>	C	D	E	H <sub>E</sub>	A <sub>1</sub>	L <sub>p</sub>
mm	1.20 0.90	0.60 0.50	0.135 0.100	2.75 2.55	1.65 1.55	3.85 3.55	0.10 0.01	0.50 0.20