

RoHS

版本 REV	变更事项 CHANGE CONTENT	版数 THERUNDER	变更日期 DATE
A0			

技术要求:

Technical requirement

一. 电气性能:

electrical performance

1-1. 额定电流: 1A AC DC.

rated current: 1A AC DC.

1-2. 接触电阻: $\leq 20m\Omega$

Contact resistance: $\leq 20m\Omega$

1-3. 绝缘电阻: $\geq 1000M\Omega$

Insulation resistance: $\geq 1000M\Omega$

1-4. 耐压: 550V AC/Minute

withstand voltage: 550V AC/Minute

二. 物理特性:

Physical characteristics

2-1. 环境温度: $-25^{\circ}C \sim 105^{\circ}C$

environmental temperature: $-25^{\circ}C \sim 105^{\circ}C$

2-2. 焊接温度: $+260^{\circ}C$, 10s max

welding temperature: $+260^{\circ}C$, 10s max

三. 材质:



Material

3-1. 塑胶: PA6T(Black) UL94V-0

plastic: PA6T(Black) UL94V-0

3-2. 插针: 磷铜/镀金

pin: Phosphor/Gold plated

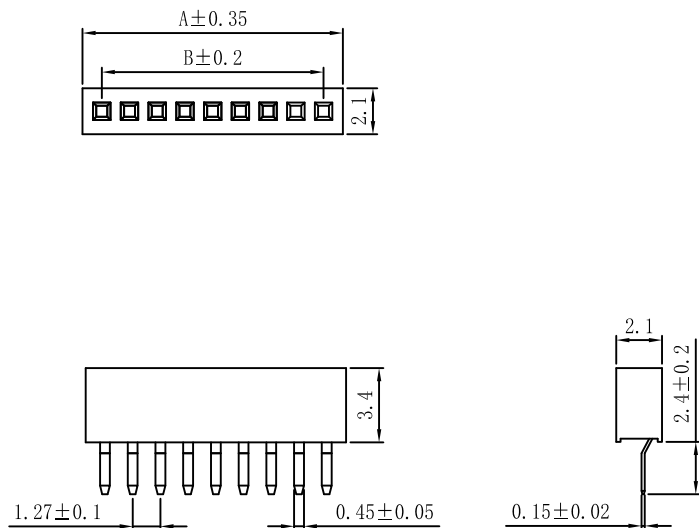

P.C.B LAYOUT

PIN	A	B
1x2A	2.94	1.27
1x3A	4.21	2.54
1x4A	5.48	3.81
1x5A	6.75	5.08
1x6A	8.02	6.35
1x7A	9.29	7.62
1x8A	10.56	8.89
1x9A	11.83	10.16
1x10A	13.10	11.43
1x11A	14.37	12.70
1x12A	15.64	13.97
1x13A	16.91	15.24
1x14A	18.18	16.51
1x15A	19.45	17.78
1x16A	20.72	19.05
1x17A	21.99	20.32
1x18A	23.26	21.59
1x19A	24.53	22.86
1x20A	25.80	24.13
1x21A	27.07	25.40
1x22A	28.34	26.67
1x23A	29.61	27.94
1x24A	30.88	29.21
1x25A	32.15	30.48
1x26A	33.42	31.75
1x27A	34.69	33.02
1x28A	35.96	34.29
1x29A	37.23	35.56
1x30A	38.50	36.83
1x31A	39.77	38.10
1x32A	41.04	39.37
1x33A	42.31	40.64
1x34A	43.58	41.91
1x35A	44.85	43.18
1x36A	46.12	44.45
1x37A	47.39	45.72
1x38A	48.66	46.99
1x39A	49.93	48.26
1x40A	51.20	49.53
1x41A	52.47	50.80
1x42A	53.74	52.07
1x43A	55.01	53.34
1x44A	56.28	54.61
1x45A	57.55	55.88
1x46A	58.82	57.15
1x47A	60.09	58.42
1x48A	61.36	59.69
1x49A	62.63	60.96
1x50A	63.90	62.23

3	包装	<input type="checkbox"/> 袋装 <input checked="" type="checkbox"/> 管装 <input type="checkbox"/> 卷装 <input type="checkbox"/> 盒装	1	PCS
2	塑胶	PH1.27*3.4 1*nP PA6T料	1	PCS
1	端子	PC2.4mm 磷铜镀金G/F	/	PCS
ITEM	PART NAME	DESCRIPTION	QUA'Y	UNIT

	单位	mm	深圳市泰华电子有限公司 TaiHua Electronics Co., Ltd			
	比例					
x. ± 0.5	x.* ±	SCALE	版本:	A0	产品名称	PH1.27mm 排母 G/F 180度 DIP
. x ± 0.30	. x * ±	APPROVED BY	页次:	1/1	产品料号	
. xx ± 0.20	. xx * ±	审核:	日期:		客户料号	
. xxx ± 0.005	. xxx * ±	制图: 封文辉	日期:		Client No.	
		DRAWN BY				