

RoHS

| | | | |
|-----------------|------------------------|------------------|--------------|
| 版本 REV A0 | 变更事项 CHANGE CONTENT | 依据 THEREUNDER | 变更日期 DATE |
|-----------------|------------------------|------------------|--------------|

技术要求:

Technical requirement

一. 电气性能:

electrical performance

1-1. 额定电流: 2A AC DC.
rated current: 2A AC DC.

1-2. 接触电阻: $\leq 20m\Omega$

Contact resistance: $\leq 20m\Omega$

1-3. 绝缘电阻: $\geq 1000M\Omega$

Insulation resistance: $\geq 1000M\Omega$

1-4. 耐压: 550V AC/Minute
withstand voltage: 550V AC/Minute

二. 物理特性:

Physical characteristics

2-1. 环境温度: $-25^{\circ}C \sim 105^{\circ}C$

environmental temperature: $-25^{\circ}C \sim 105^{\circ}C$

2-2. 焊接温度: $+260^{\circ}C$, 10s max





welding temperature: $+260^{\circ}C$, 10s max

三. 材质:

Material

3-1. 塑胶: PA6T(Black) UL94V-0
plastic: PA6T(Black) UL94V-0

3-2. 插针: 黄铜/镀金
pin: Brass/Gold plated

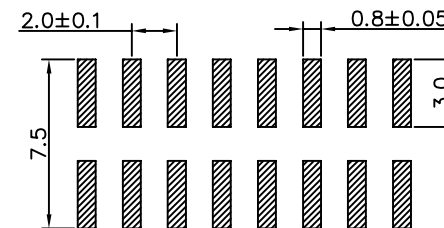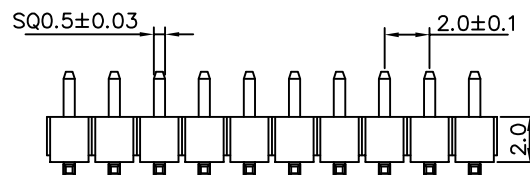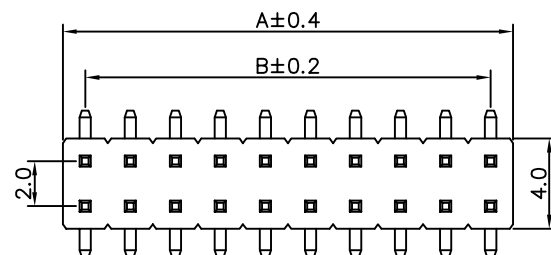

P.C.B LAYOUT

| PIN | A | B |
|-------|-------|-------|
| 2x2A | 4.50 | 2.00 |
| 2x3A | 6.50 | 4.00 |
| 2x4A | 8.50 | 6.00 |
| 2x5A | 10.50 | 8.00 |
| 2x6A | 12.50 | 10.00 |
| 2x7A | 14.50 | 12.00 |
| 2x8A | 16.50 | 14.00 |
| 2x9A | 18.50 | 16.00 |
| 2x10A | 20.50 | 18.00 |
| 2x11A | 22.50 | 20.00 |
| 2x12A | 24.50 | 22.00 |
| 2x13A | 26.50 | 24.00 |
| 2x14A | 28.50 | 26.00 |
| 2x15A | 30.50 | 28.00 |
| 2x16A | 32.50 | 30.00 |
| 2x17A | 34.50 | 32.00 |
| 2x18A | 36.50 | 34.00 |
| 2x19A | 38.50 | 36.00 |
| 2x20A | 40.50 | 38.00 |
| 2x21A | 42.50 | 40.00 |
| 2x22A | 44.50 | 42.00 |
| 2x23A | 46.50 | 44.00 |
| 2x24A | 48.50 | 46.00 |
| 2x25A | 50.50 | 48.00 |
| 2x26A | 52.50 | 50.00 |
| 2x27A | 54.50 | 52.00 |
| 2x28A | 56.50 | 54.00 |
| 2x29A | 58.50 | 56.00 |
| 2x30A | 60.50 | 58.00 |
| 2x31A | 62.50 | 60.00 |
| 2x32A | 64.50 | 62.00 |
| 2x33A | 66.50 | 64.00 |
| 2x34A | 68.50 | 66.00 |
| 2x35A | 70.50 | 68.00 |
| 2x36A | 72.50 | 70.00 |
| 2x37A | 74.50 | 72.00 |
| 2x38A | 76.50 | 74.00 |
| 2x39A | 78.50 | 76.00 |
| 2x40A | 80.50 | 78.00 |

| | | | | |
|------|-----------|--|------|------|
| 3 | 包装 | <input checked="" type="checkbox"/> 袋装 <input type="checkbox"/> 管装 <input type="checkbox"/> 卷装 <input type="checkbox"/> 盒装 | 1 | PCS |
| 2 | 塑胶 | PH2.0*2.0 2*40P PA6T料 | 1 | PCS |
| 1 | 方针 | 0.5mm L=6.2 黄铜镀金G/F | / | PCS |
| ITEM | PART NAME | DESCRIPTION | QUAY | UNIT |

| | | | | |
|------------|-------------|-------------|---|-------------------------|
| | 单位 UNIT | mm | 泰华电子有限公司 TaiHua Electronics Co., Ltd | |
| | 比例 SCALE | Free | | |
| x.±0.5 | x.*± | 核准: | 版本: A0 | 产品名称 Production name |
| .x±0.30 | .x.*± | APPROVED BY | 页次: 1/1 | 产品料号 Product No |
| .xx±0.20 | .xx.*± | 审核: | 日期: | 客户料号 Client No |
| .xxx±0.005 | .xxx.*± | CHECKED BY | 2017.10.11 | |
| | | 制图: 吕灿东 | | |
| | | DRAWN BY | | |