
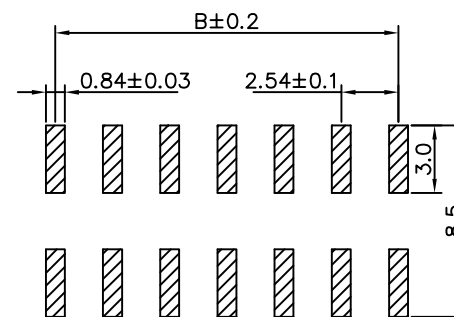

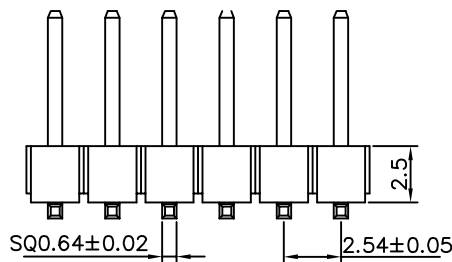


RoHS

| | | | |
|-----------------|------------------------|------------------|--------------|
| 版本 REV A0 | 变更事项 CHANGE CONTENT | 依据 THEREUNDER | 变更日期 DATE |
|-----------------|------------------------|------------------|--------------|

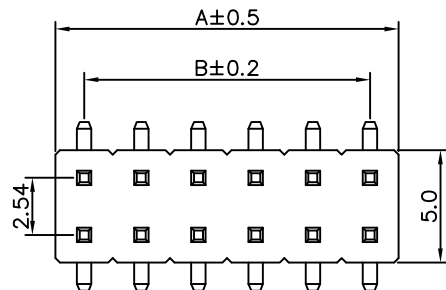

P.C.B LAYOUT

技术要求:
Technical requirement

一. 电气性能:

electrical performance

1-1. 额定电流: 3A AC DC.
rated current: 3A AC DC.

1-2. 接触电阻: ≤20mΩ

Contact resistance: ≤20mΩ

1-3. 绝缘电阻: ≥1000MΩ

Insulation resistance: ≥1000MΩ

1-4. 耐压: 550V AC/Minute

withstand voltage: 550V AC/Minute

二. 物理特性:

Physical characteristics

2-1. 环境温度: -25℃~105℃

environmental temperature: -25℃~105℃

2-2. 焊接温度: +260℃, 10s max

welding temperature: +260℃, 10s max

三. 材质:

Material

3-1. 塑胶: PA6T(Black) UL94V-0

plastic: PA6T(Black) UL94V-0

3-2. 插针: 黄铜/镀金

pin: Brass/Gold plated

| PIN | A | B |
|-------|--------|-------|
| 2x2A | 5.08 | 2.54 |
| 2x3A | 7.62 | 5.08 |
| 2x4A | 10.16 | 7.62 |
| 2x5A | 12.70 | 10.16 |
| 2x6A | 15.24 | 12.70 |
| 2x7A | 17.78 | 15.24 |
| 2x8A | 20.32 | 17.78 |
| 2x9A | 22.86 | 20.32 |
| 2x10A | 25.40 | 22.86 |
| 2x11A | 27.94 | 25.40 |
| 2x12A | 30.48 | 27.94 |
| 2x13A | 33.02 | 30.48 |
| 2x14A | 35.56 | 33.02 |
| 2x15A | 38.10 | 35.56 |
| 2x16A | 40.64 | 38.10 |
| 2x17A | 43.18 | 40.64 |
| 2x18A | 45.72 | 43.18 |
| 2x19A | 48.26 | 45.72 |
| 2x20A | 50.80 | 48.26 |
| 2x21A | 53.34 | 50.80 |
| 2x22A | 55.88 | 53.34 |
| 2x23A | 58.42 | 55.88 |
| 2x24A | 60.96 | 58.42 |
| 2x25A | 63.50 | 60.96 |
| 2x26A | 66.04 | 63.50 |
| 2x27A | 68.58 | 66.04 |
| 2x28A | 71.12 | 68.58 |
| 2x29A | 73.66 | 71.12 |
| 2x30A | 76.20 | 73.66 |
| 2x31A | 78.74 | 76.20 |
| 2x32A | 81.28 | 78.74 |
| 2x33A | 83.82 | 81.28 |
| 2x34A | 86.36 | 83.82 |
| 2x35A | 88.90 | 86.36 |
| 2x36A | 91.44 | 88.90 |
| 2x37A | 93.98 | 91.44 |
| 2x38A | 96.52 | 93.98 |
| 2x39A | 99.06 | 96.52 |
| 2x40A | 101.60 | 99.06 |

| | | | | |
|------|-----------|--|------|------|
| 3 | 包装 | <input checked="" type="checkbox"/> 袋装 <input type="checkbox"/> 管装 <input type="checkbox"/> 卷装 <input type="checkbox"/> 盒装 | 1 | PCS |
| 2 | 塑胶 | PH2.54*2.5 2*40P PA6T料 | 1 | PCS |
| 1 | 方针 | 0.64mm L=11.0 黄铜镀金G/F | / | PCS |
| ITEM | PART NAME | DESCRIPTION | QUAY | UNIT |

| | | | | | |
|------------|-------------|-------------|--|-------------------------|---------------------|
| | 单位 UNIT | mm | 泰华电子有限公司 TaiHua Electronics Co., Ltd | | |
| | 比例 SCALE | | | | |
| x.±0.5 | x.*± | 核准: | 版本: A0 | 产品名称 Production name | PH2.54mm 排针 立贴 2xNP |
| .x±0.30 | .x.*± | APPROVED BY | 审核: | 页次: 1/1 | 产品料号 Product No |
| .xx±0.20 | .xx.*± | CHECKED BY | 制图: 吕灿东 | 日期: | 客户料号 Client No |
| .xxx±0.005 | .xxx.*± | DRAWN BY | | | |