

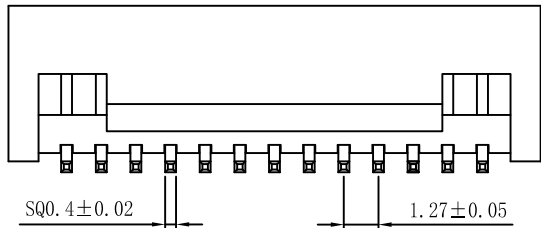


RoHS

版本 REV	变更事项 CHANGE CONTENT	版数 THERUNDER	变更日期 DATE
A0			

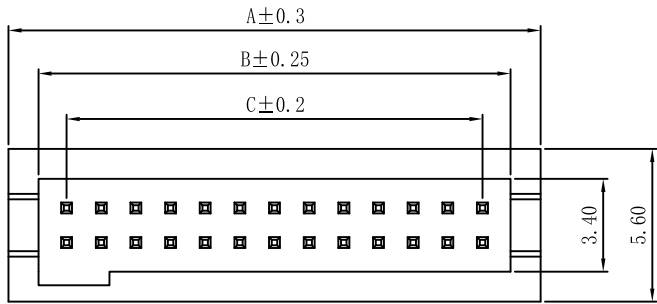

技术要求:

Technical requirement

一. 电气性能:

electrical performance

- 1-1. 额定电流: 1A AC DC.
rated current: 1A AC DC.
- 1-2. 接触电阻: $\leq 20m\Omega$
Contact resistance: $\leq 20m\Omega$
- 1-3. 绝缘电阻: $\geq 1000M\Omega$
Insulation resistance: $\geq 1000M\Omega$
- 1-4. 耐压: 550V AC/Minute
withstand voltage: 550V AC/Minute

二. 物理特性:

Physical characteristics


- 2-1. 环境温度: $-25^{\circ}C \sim 105^{\circ}C$
environmental temperature: $-25^{\circ}C \sim 105^{\circ}C$
- 2-2. 焊接温度: $+260^{\circ}C$, 10s max
welding temperature: $+260^{\circ}C$, 10s max

三. 材质:

Material

- 3-1. 塑胶: PA6T(Black) UL94V-0
plastic: PA6T(Black) UL94V-0
- 3-2. 插针: 黄铜/镀金
pin: Brass/Gold plated

PIN	A	B	C
2x5A	9.27	6.99	5.08
2x6A	10.54	8.26	6.35
2x7A	11.81	9.53	7.62
2x8A	13.08	10.80	8.89
2x9A	14.35	12.07	10.16
2x10A	15.62	13.34	11.43
2x11A	16.89	14.61	12.70
2x12A	18.16	15.88	13.97
2x13A	19.43	17.15	15.24
2x14A	20.70	18.42	16.51
2x15A	21.97	19.69	17.78
2x16A	23.24	20.96	19.05
2x17A	24.51	22.23	20.32
2x18A	25.78	23.50	21.59
2x19A	27.05	24.77	22.86
2x20A	28.32	26.04	24.13
2x21A	29.59	27.31	25.40
2x22A	30.86	28.58	26.67
2x23A	32.13	29.85	27.94
2x24A	33.40	31.12	29.21
2x25A	34.67	32.39	30.48
2x26A	35.94	33.66	31.75
2x27A	37.21	34.93	33.02
2x28A	38.48	36.20	34.29
2x29A	39.75	37.47	35.56
2x30A	41.02	38.74	36.83
2x31A	42.29	40.01	38.10
2x32A	43.56	41.28	39.37
2x33A	44.83	42.55	40.64
2x34A	46.10	43.82	41.91
2x35A	47.37	45.09	43.18
2x36A	48.64	46.36	44.45
2x37A	49.91	47.63	45.72
2x38A	51.18	48.90	46.99
2x39A	52.45	50.17	48.26
2x40A	53.72	51.44	49.53
2x41A	54.99	52.71	50.80
2x42A	56.26	53.98	52.07
2x43A	57.53	55.25	53.34
2x44A	58.80	56.52	54.61
2x45A	60.07	57.79	55.88
2x46A	61.34	59.06	57.15
2x47A	62.61	60.33	58.42
2x48A	63.88	61.60	59.69
2x49A	65.15	62.87	60.96
2x50A	66.42	64.14	62.23



P.C.B LAYOUT

3	包装	<input checked="" type="checkbox"/> 袋装 <input type="checkbox"/> 管装 <input type="checkbox"/> 卷装 <input type="checkbox"/> 盒装	1	PCS
2	塑胶	PH1.27*5.7 2*nP PA6T料	1	PCS
1	方针	0.4x6.6mm 黄铜镀金G/F	/	PCS
ITEM	PART NAME	DESCRIPTION	QUA'Y	UNIT
1	2	3	4	5

	单位	mm	深圳市泰华电子有限公司 TaiHua Electronics Co., Ltd	
	比例	SCALE		
x. ± 0.5	x.* ±		核准:	版本: A0
.x ± 0.30	.x * ±		APPROVED BY	产品名称
.xx ± 0.20	.xx * ±		审核:	PH1.27mm 筒牛 立贴 G/F 2xNP
.xxx ± 0.005	.xxx * ±		CHECKED BY	产品料号
			制图: 封文辉	日期:
			DRAWN BY	客户料号
				Client N: