

RoHS

版本 REV	变更事项 CHANGE CONTENT	版数 ITERMINER	变更日期 DATE
A0			

技术要求:
Technical requirement

一. 电气性能:

electrical performance

1-1. 额定电流: 2A AC DC.

rated current: 2A AC DC.

1-2. 接触电阻: $\leq 20m\Omega$

Contact resistance: $\leq 20m\Omega$

1-3. 绝缘电阻: $\geq 1000M\Omega$

Insulation resistance: $\geq 1000M\Omega$

1-4. 耐压: 550V AC/Minute

withstand voltage: 550V AC/Minute

二. 物理特性:

Physical characteristics

2-1. 环境温度: $-25^{\circ}C \sim 105^{\circ}C$

environmental temperature: $-25^{\circ}C \sim 105^{\circ}C$

2-2. 焊接温度: $+260^{\circ}C$, 10s max

welding temperature: $+260^{\circ}C$, 10s max

三. 材质:





Material

3-1. 塑胶: PA6T (Black) UL94V-0

plastic: PA6T (Black) UL94V-0

3-2. 插针: 黄铜/镀金

pin: Brass/Gold plated

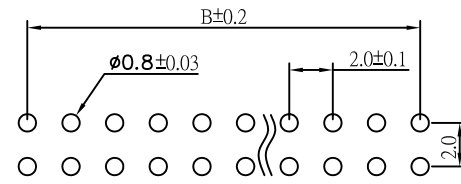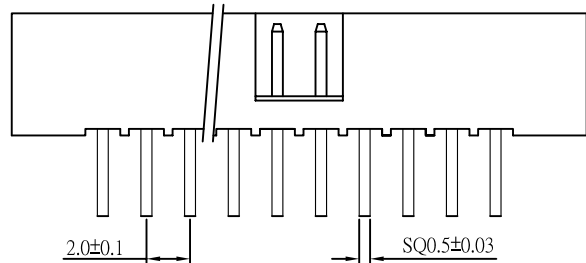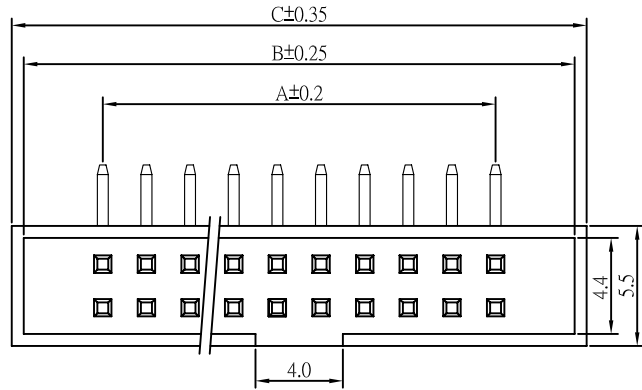

P.C.B LAYOUT

PIN	A	B	C
2x3A	4.00	12.00	13.34
2x4A	6.00	14.00	15.34
2x5A	8.00	16.00	17.34
2x6A	10.00	18.00	19.34
2x7A	12.00	20.00	21.34
2x8A	14.00	22.00	23.34
2x9A	16.00	24.00	25.34
2x10A	18.00	26.00	27.34
2x11A	20.00	28.00	29.34
2x12A	22.00	30.00	31.34
2x13A	24.00	32.00	33.34
2x14A	26.00	34.00	35.34
2x15A	28.00	36.00	37.34
2x16A	30.00	38.00	39.34
2x17A	32.00	40.00	41.34
2x18A	34.00	42.00	43.34
2x19A	36.00	44.00	45.34
2x20A	38.00	46.00	47.34
2x21A	40.00	48.00	49.34
2x22A	42.00	50.00	51.34
2x23A	44.00	52.00	53.34
2x24A	46.00	54.00	55.34
2x25A	48.00	56.00	57.34

3	包装	吸塑盒	1	PCS
2	塑胶	PH2.0*5.6 2*nP PA6T料	1	PCS
1	方针	0.5*10.5/14.5mm 黄铜镀金G/F	/	PCS
ITEM	PART NAME	DESCRIPTION	QUA'Y	UNIT
1	2	3	4	5

	单位 UNIT	mm	泰华电子有限公司 TaiHua Electronics Co., Ltd	
	比例 SCALE			
x. ±0.5	x.*±	核准:	版本: A0	客户名称 Client name
.x ±0.30	.x *±	APPROVED BY	页次: 1/1	产品名称 Production name
.xx ±0.20	.xx *±	CHECKED BY	日期:	产品料号 Product No
.xxx ±0.005	.xxx *±	制图: 吕灿东		客户料号 Client NO
		DRAWN BY		