


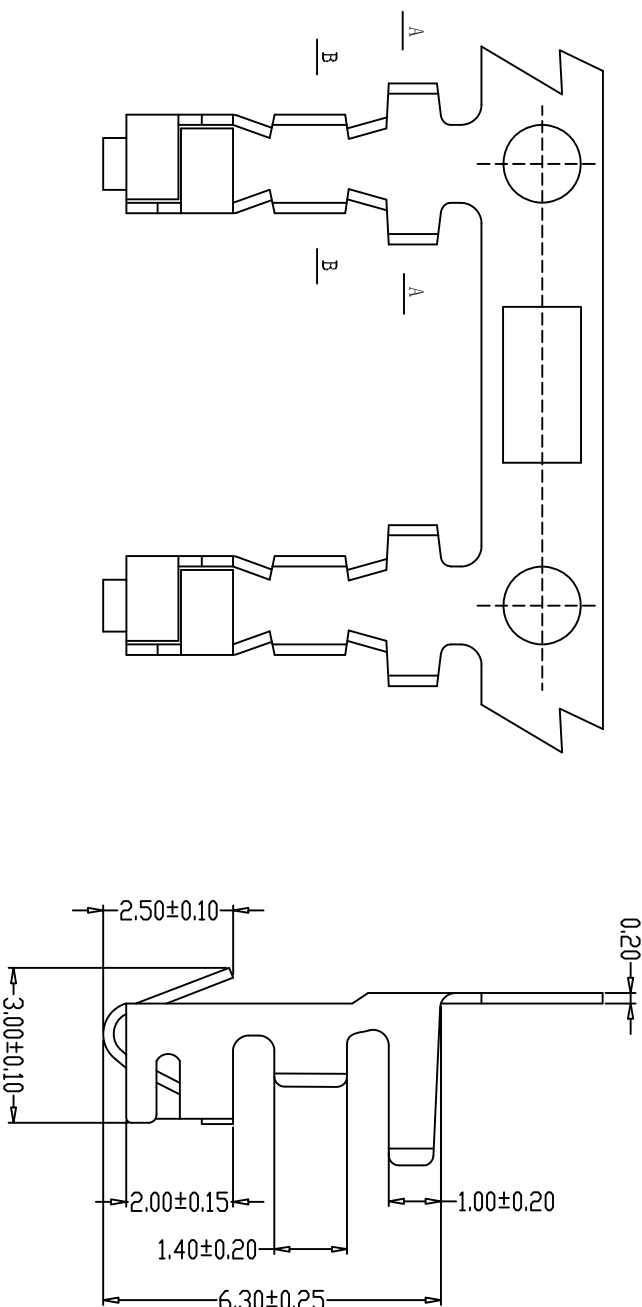

SPECIFICATIONS

- 1、Current Rating: 3A AC, DC
- 2、Voltage Rating: 250V AC, DC
- 3、Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- 4、Contact Resistance: $20\text{m}\Omega$ Max
- 5、Insulation Resistance: $1000\text{M}\Omega$ Min
- 6、Withstanding Voltage: 1000V AC/minute
- 7、Material: Phosphoric bronze Tin-plated
- 8、Applicable Wire Sizes: AWG#22~28#

单位
UNIT
mm深圳市泰华电子有限公司
*TaiHua Electronics Co., Ltd*X. ± 0.5
X. $\pm$ 批准:
APPROVED BY

版本: A0

产品名称
Product Name

HA端子

X. ± 0.30
X. $\pm$ 审核:
CHECKED BY

页次: 1/1

产品料号
Product No

TH-A2504-T

X. ± 0.20
X. $\pm$ 制图:
DRAWN BY

封文辉

客户料号
Client NoX. ± 0.005
X. $\pm$

2022.9.2