

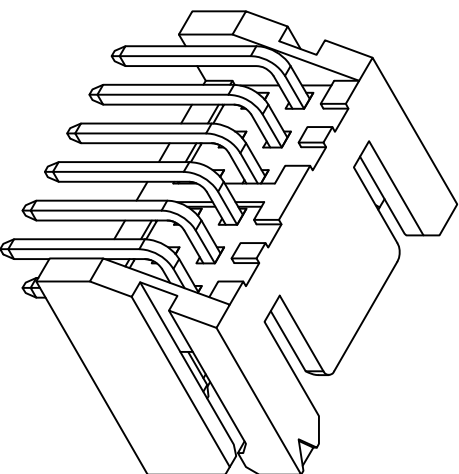
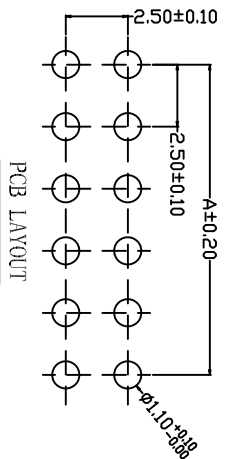


SPECIFICATIONS

- 1、Current Rating: 3A AC, DC
- 2、Voltage Rating: 250V AC, DC
- 3、Temperature Range: -25°C~+85°C
- 4、Contact Resistance: 30mΩ Max
- 5、Insulation Resistance: 1000MΩ Min
- 6、Withstanding Voltage: 800V AC/minute
- 7、Material: Wafer PA66, Beige UL94V-0
PIN Brass Tin-plated

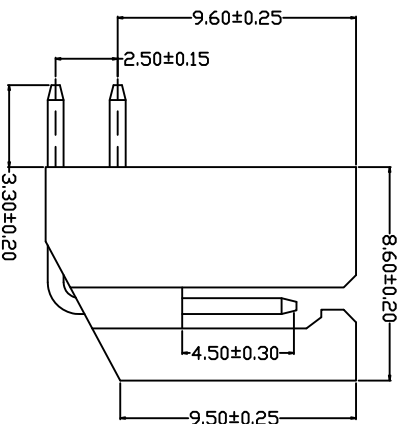

编号	尺寸 (mm)	
	A	B
A2557-2*02AW	2.50	7.50
A2557-2*03AW	5.00	10.00
A2557-2*04AW	7.50	12.50
A2557-2*05AW	10.00	15.00
A2557-2*06AW	12.50	17.50
A2557-2*07AW	15.00	20.00
A2557-2*08AW	17.50	22.50
A2557-2*09AW	20.00	25.00
A2557-2*10AW	22.50	27.50
A2557-2*11AW	25.00	30.00
A2557-2*12AW	27.50	32.50
A2557-2*20AW	47.50	52.50



单位: mm
比例: SCALE

深圳市泰华电子有限公司
TaiHua Electronics Co., Ltd

X. ±0.5	X*±
. X±0.30	. X*±
. XX±0.20	. XX*±
. XXX±0.008	. XXX*±

核准: APPROVED BY
审核: CHECKED BY
制图: DRAWN BY

版本: A0
页次: 1/1

产品名称: XHD2.5弯针 WAFER DIP TYPE
产品料号: TH-A2557-2*02NAW
客户料号: Client No

日期: 2022.9.6
封文辉