

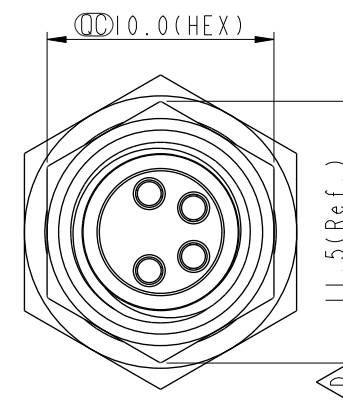
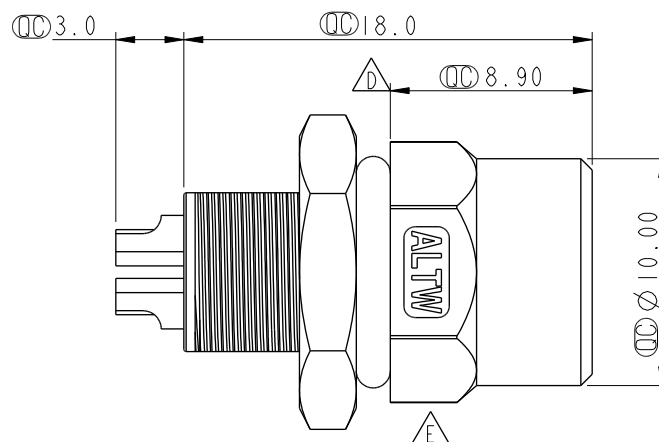
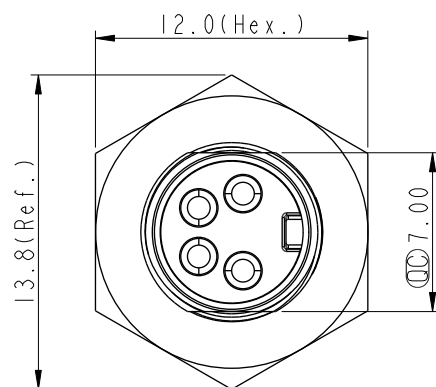



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
D	LEN-910184	2009/01/07	Ivan Lin	Change rev.to ECN note
E	C191918	2019/11/04	JC Chen	$\triangle F$ X1
F	C210686	2021/05/11	Vicky	$\triangle F$ X5

Recommended
Panel Cut-Out $\triangle F$
8-XXPFFS-SH7001


XX: No. Of Pin



3P



4P

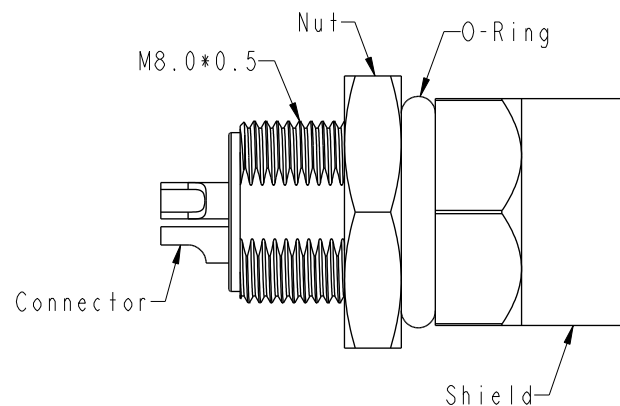 $\triangle F$ Pin Assignments Front View

- $\triangle F$ Note:
- * RoHS Compliant
 - * CC Important dimension
 - * Waterproof rate: IPX7, unmated
 - * Connector
 - Housing: Thermoplastic, Black
 - Pin: Copper alloy, Gold plated
 - $\triangle D$ O-Ring: Rubber, Green
 - * Shield: Metal
 - $\triangle D$ * Nut: Metal
 - * O-Ring: Rubber, Black
 - * For panel thickness max: 4.5mm
 - * Nut is packed separately in pe bag

UNIT : mm				TITLE O SEN, M8 RECEPTACLE, F, F, SOLDER							
TOLERANCE				SCALE	3:1	SIZE	A4	SHEET	1	OF	1
.X ±0.25				REV.	F	WC-REV.	A.3	CC: Inspection item			
.XX ±0.1											
.XXX ±0.05											
ANGLES ±1°											

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DWG NO	CUSTOMER	DRAWN BY	CHECKED BY	APPROVED BY	DATE
	$\triangle F$ 8-XXPFFS-SH7001	ALTW	Ivan Lin	Tommy Hom	Luke Chang	2009-01-07
						2009-01-07
						2009-01-07