


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A		2020-03-16	Allen Pan	Rev.02 To Rev.A
B	C200506	2020-04-16	Allen Pan	$\triangle B \times 6$
C	C201393	2020-09-10	Allen Pan	$\triangle C \times 1$

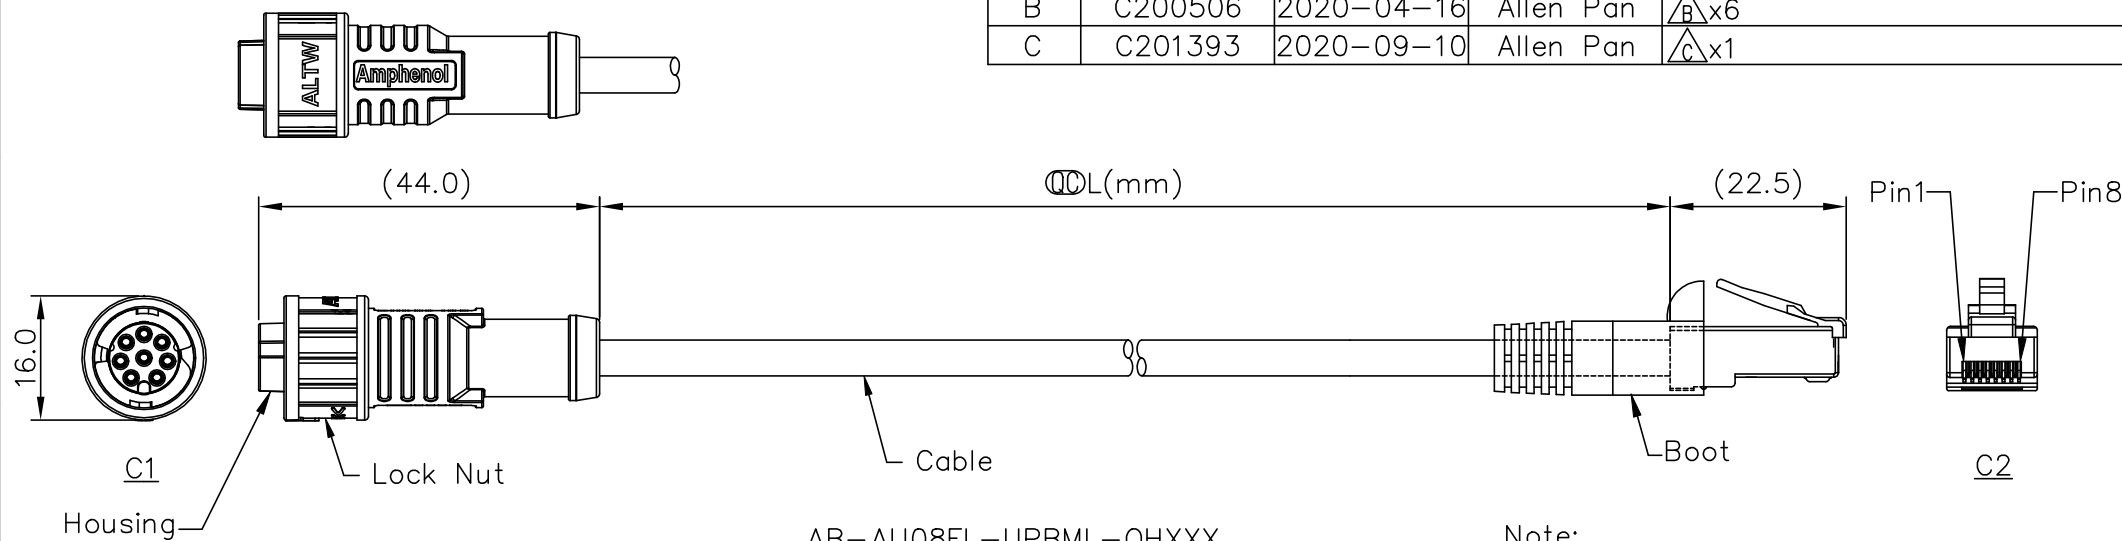

AB-AU08FL-UPBML-QHXXX

$\triangle B$ XXX: 0.5~40Meters
 A05: 0.5Meter
 001: 01Meter
 002: 02Meters
 :
 :
 $\triangle B$ 040: 40Meters

Note:
 * \odot Important Dimension To Check.
 * C1
 Waterproof Rate: IP68, Mated.
 Housing: Thermoplastic, Black.
 Pin: Copper Alloy, Gold Plated.
 Lock Nut: Thermoplastic, Black.
 O-Ring: Rubber, Black.
 * C2
 Plug: RJ45 Plug, 8P8C.
 * Cable: CAT-5E, UTP, 24#*4P.
 PVC Jacket, OD=6mm, Black.
 $\triangle C$ * Cable Length Tolerance:
 0.5M: +60/-0mm.
 01M: +60/-0mm.
 02~03M: +120/-0mm.
 04~05M: +160/-0mm.
 06~10M: ± 100 mm.
 11~20M: ± 200 mm.
 21~30M: ± 300 mm.
 31~40M: ± 500 mm.

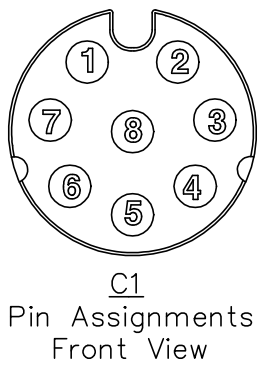

$\triangle B$	$\triangle B$	$\triangle B$	$\triangle B$	
3	Brown	棕	8	Twist 對線
2	White/Brown	白/棕	7	
8	Green	綠	6	Twist 對線
5	White/Green	白/綠	3	
7	Blue	藍	4	Twist 對線
1	White/Blue	白/藍	5	
4	Orange	橘	2	Twist 對線
6	White/Orange	白/橘	1	
C1	Wire Color		C2	

UNIT: mm	
TOLERANCE	± 0.5 mm

TITLE XLOK, A-2A, DOUBLE-ENDED, F, 08P	
SCALE Free	SHEET 1 OF 1
REV. C	SIZE A4
\odot : Inspection Item	

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Allen Pan	DATE 2020-03-16
DWG NO AB-AU08FL-UPBML-QHXXX	CHECKED BY Sam Ho	DATE 2020-03-16
CUSTOMER ALTW	APPROVED BY Fred Lee	DATE 2020-03-16