





5	6	7	8
REV. B	ECN NO. LEN1590386~89	DATE 2015/09/11	SIGN Ruru
			DESCRIPTION Change Logo & Note

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

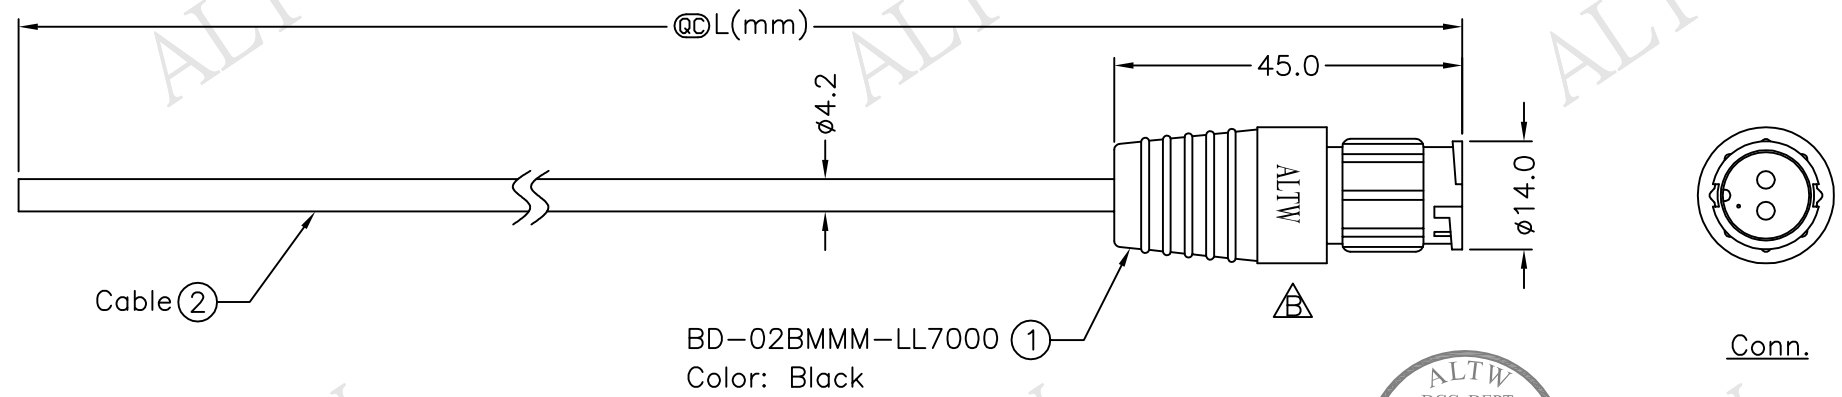

BD-02BMMM-LL7AXX
 ↑
 XX:01~99Meter
 01:01Meter
 02:02Meters
 :
 :
 99:99Meters
 Cable Length(L):01~99Meters

- Note:
- * @C Important Dimension To Check.
 - * Waterproof Rate: IP67
 - * Connector: Nylon+GF, Black
 - * Pin: Copper Alloy, Gold Plated
 - * Cable: UL2464 24AWG*2C+Drain+Al/My PVC Jacket UV Resistant, OD=4.2mm, Black
 - * Cable Length Tolerance: 01M: ±40mm
 02M~05M: ±60mm
 06M~10M: ±100mm
 11M~30M: ±200mm
 31M~99M: ±500mm



Pin Assignments
Front View

2	Red
1	Black
Conn.	Wire Color
	Pin Out

UNIT:mm	
TOLERANCE	±0.5 mm

TITLE		Standard	
Cable Lock 2Pin M Conn M Pin			
SCALE	Free	SHEET	1 OF 1
REV. B	SIZE A4	@C :Inspection Item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Ruru	DATE 2015/09/11
DWG NO BD-02BMMM-LL7AXX	CHECKED BY Rita	DATE 2015/09/11
CUSTOMER ALTW	APPROVED BY Lion	DATE 2015/09/11