



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION

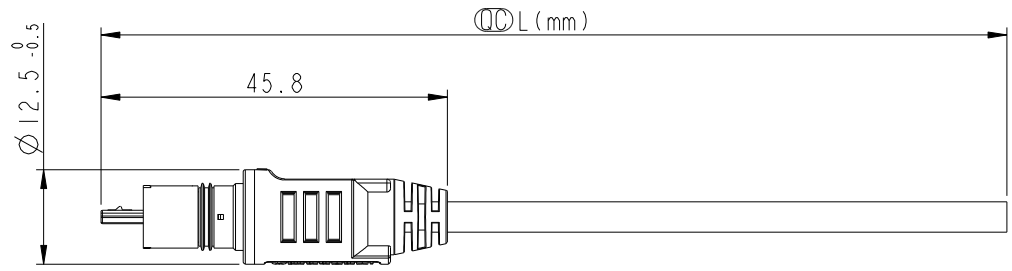


Conn.

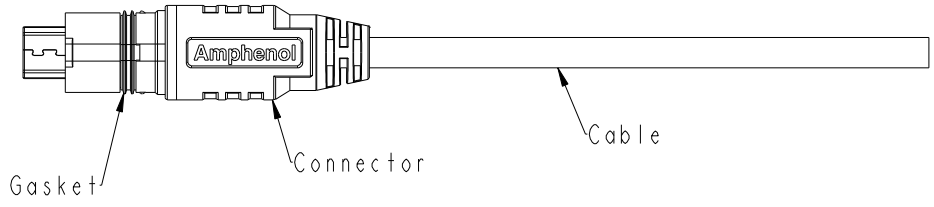

MUB-20AMMM-QL7AXX

- 01: 01Meter
- 02: 02Meters



Pin Assignments Front View

Shield	Drain	地線
5	Black	黑
4	N/A	
3	Green	綠
2	White	白
1	Red	紅
Conn.	Wire Color	

Twist
對線

Notes:

- * \varnothing Important Dimension To Check.
- * Waterproof Rate: IPX7.
- * Connector: Micro USB Type-B Plug.
- * Outer Mold: Thermoplastic, Black.
- * Gasket: Rubber, Black.
- * Cable: UL2725, 28AWG*1P+28AWG*2C+D+AL/MY+B, PVC Jacket, OD3.8, Black.
- * Cable Length Tolerance: 01M: +50/-0mm
02M: +100/-0mm

UNIT:mm

TOLERANCE ± 0.5

TITLE USB, MICRO B, 2.0, CABLE W/SR M, M, MOLDING, QUICK			
SCALE 1:2	SIZE A4	SHEET 1 OF 1	
REV. A	WC-REV. .0	\varnothing : Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Feng_Li	DATE 2020-01-10
DWG NO MUB-20AMMM-QL7AXX	CHECKED BY Jerry	DATE 2020-01-10
CUSTOMER ALTW	APPROVED BY Max	DATE 2020-01-10