


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Released	2020/08/21	Ruru	Old Item No. NUB-20AFM-SA7AXX

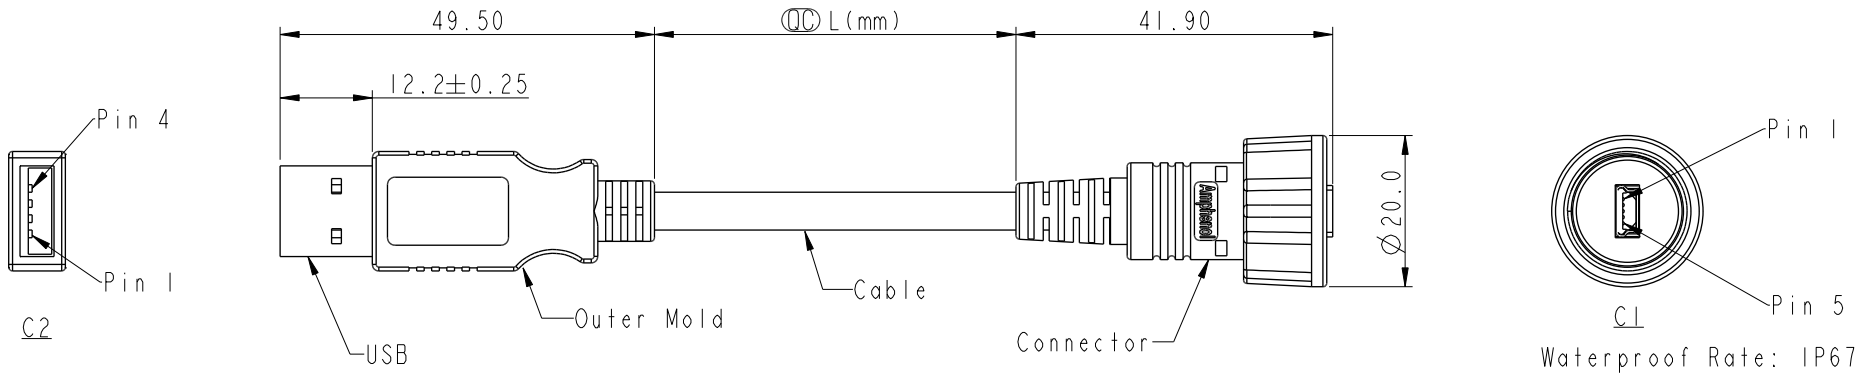

NUB20FL-NAML-SAXXX

XXX:01~05Meter
 001:01Meter
 002:02Meter
 ...
 005:05Meter
 Cable Length(L):01~05Meters

Note:
 * \varnothing Important Dimension.
 * Housing: Thermoplastic, Black
 * C1: Mini USB B Type 5 Pin Plug
 * C2: USB A Male Solder Type, Gold Plated.
 * Cable: USB 2.0 28#*1P+24#*2c+Al.My+D+B, PVC Jacket, UV Resistant, Black, OD=5mm.
 * Do Not Include On The Connector"
 * Cable Length Tolerance: 01M:+60/-0mm
 02M,03M:+120/-0mm
 04M,05M:+160/-0mm

Shield	Drain	地線	Shield
4	Black 24AWG	黑	5
3	Green 28AWG	綠	3
2	White 28AWG	白	2
1	Red 24AWG	紅	1
C2	Wire Color		C1

Pin Out

Twist

UNIT:mm		
TOLERANCE	±0.5mm	

TITLE ACC, USB, MINI B, DB-ENDED, FM			
SCALE 1:2	SIZE A4	SHEET 1 OF 1	
REV. A	WC-REV. A.3	\varnothing : Inspection item	

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO.	DRAWN BY Ruru	DATE 2020-08-21
DWG NO. NUB20FL-NAML-SAXXX	CHECKED BY Rita	DATE 2020-08-21
CUSTOMER ALTW	APPROVED BY Max	DATE 2020-08-21