




THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1350134	2013/05/08	Lu Di	Change Logo
C	LE31730076	2017/03/02	Ruru	Change Outer Mold Design
D	C221353	2022/08/29	Vicky	△X2

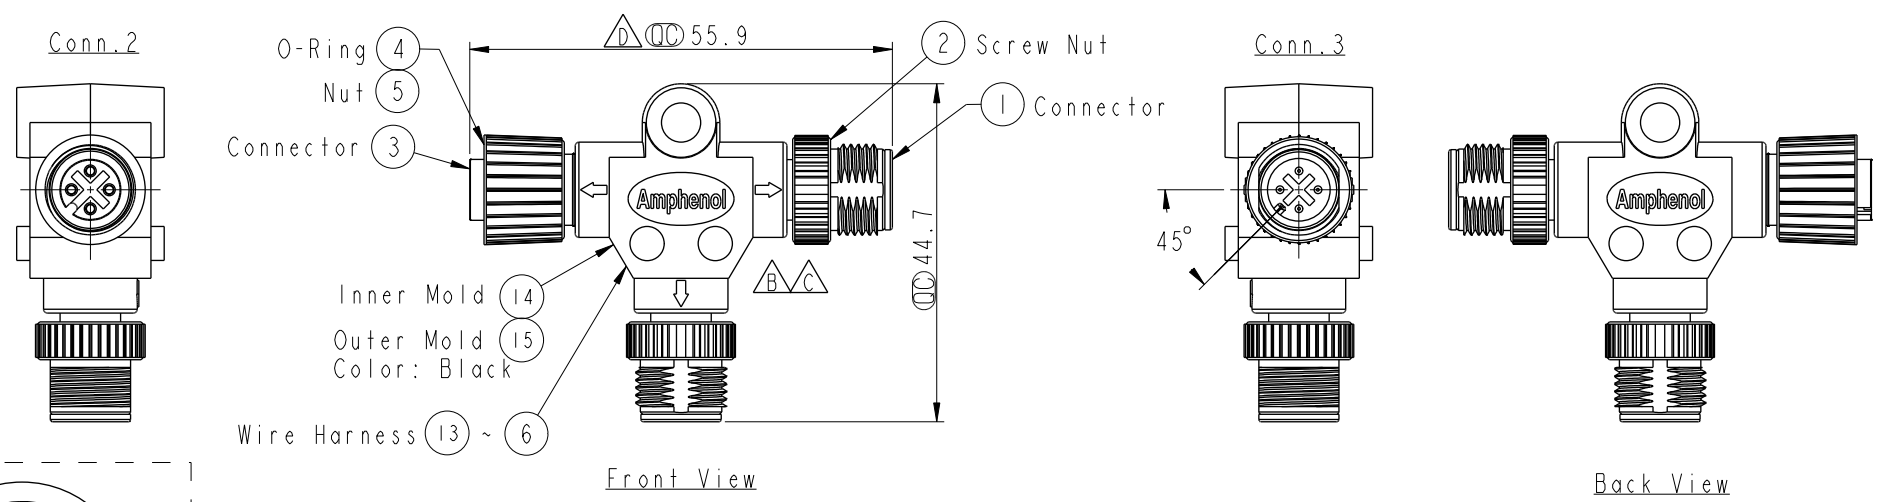

Wire Color	Conn. 1	Conn. 2	Conn. 3
Green 綠	4	4	4
Blue 藍	3	3	3
White 白	2	2	2
Black 黑	1	1	1

Note:

- * \varnothing Important Dimension
- * Waterproof Rate: IP68
IM Depth Of Water In 24 Hours
- * Connector: PU, Black
- * O- Ring: Viton, Green
- * Nut: Zinc Alloy, Nickel Plated
- * Pin: Copper Alloy, Gold Plated
- * Wire Harness: UL1007 24AWG 8PCS

UNIT:mm		TITLE
TOLERANCE	$\pm 0.5mm$	ACC, SEN, A Code, T ADA W/O CB MFM, 444
SCALE	1:1	SIZE
REV.	D	WC-REV.
		A.1
		\varnothing : Inspection item

Amphenol LTW		ITEM NO	SS-040404-MFM-TS001	DRAWN BY	Ruru	DATE	2017-03-02
安費諾亮泰企業股份有限公司		DWG NO	SS-040404-MFM-TS001	CHECKED BY	Rita	DATE	2017-03-02
		CUSTOMER	ALTW	APPROVED BY	Max	DATE	2017-03-02