


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A		2020-12-08	Allen Pan	Rev.01 To Rev.A

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

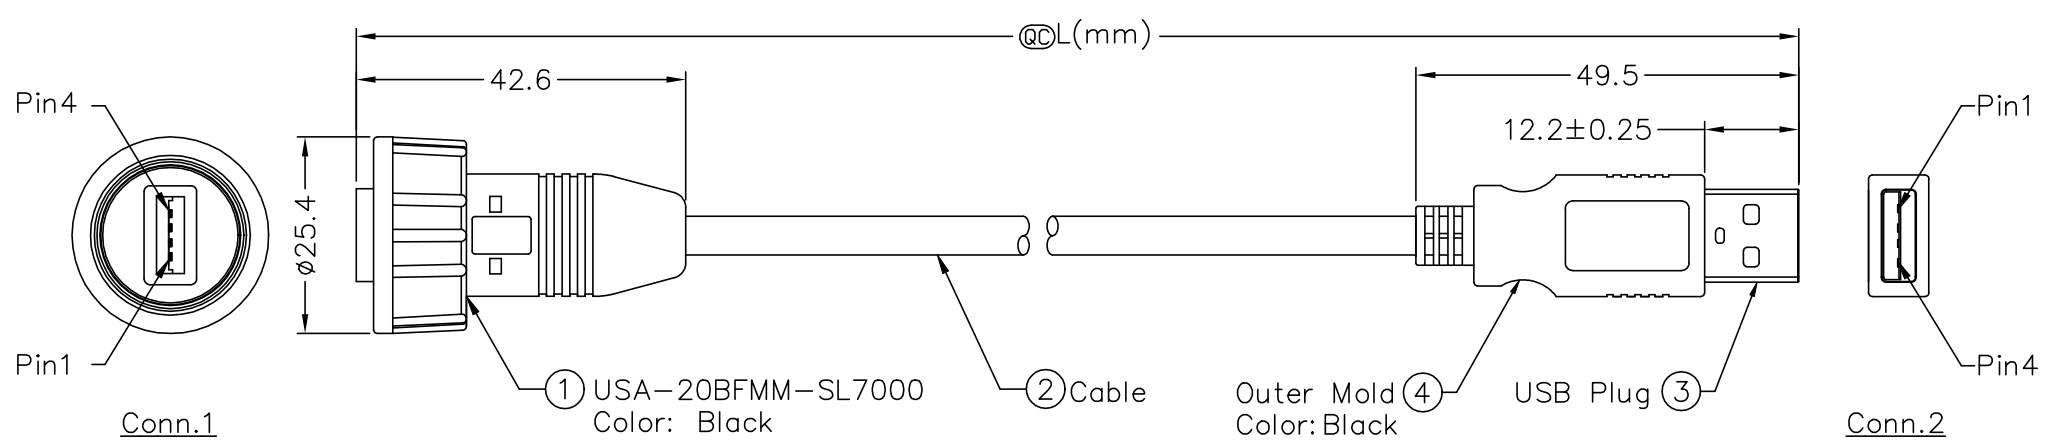

① USA-20BFMM-SL7000
Color: Black

② Cable

Outer Mold ④
Color: Black

USB Plug ③

USA20FL-NAML-SAXXX

↑
XXX: 01~05Meters
001: 01Meter
002: 02Meters
:
:
005: 05Meters
Cable Length(L): 01~05Meters

- Note:
- * Ⓞ Important Dimension.
 - * C1
Waterproof Rate: IP67.
Connector: USB2.0-A Male Solder, Gold Plated.
Gasket: Rubber, Black.
Nut: Metal.
Outer Mold: Thermoplastic, Black.
Inner Mold: Thermoplastic, Original.
 - * C2
Waterproof Rate: NON IP.
Connector: USB2.0-A Male Solder, Gold Plated.
Outer Mold: Thermoplastic, Black.
 - * Cable: USB2.0 28#*1P+24#*2C+Al.My+D+B,
PVC Jacket, UV Resistant, Black, OD=5.0mm.
 - * Do Not Include On The Connector" "
 - * Cable Length Tolerance:
01M: +60/-0mm.
02M~03M: +120/-0mm.
04M~05M: +160/-0mm.

Shield	Drain (28AWG)	地線	Shield
4	Black (24AWG)	黑	4
3	Green (28AWG)	綠	3
2	White (28AWG)	白	2
1	Red (24AWG)	紅	1
Conn.1	Wire Color		Conn.2
Pin Out			

Twist 對線

UNIT: mm	TITLE ACC, USB, A TYPE SHLD , DB-ENDED, FM	
TOLERANCE ±0.5 mm	SCALE Free	SHEET 1 OF 1
REV. A	SIZE A4	Ⓞ : Inspection Item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Allen Pan	DATE 2020-12-08
DWG NO USA20FL-NAML-SAXXX	CHECKED BY Sam Ho	DATE 2020-12-08
CUSTOMER ALTW	APPROVED BY Fred Lee	DATE 2020-12-08