

FDS3670

100V N-Channel PowerTrench® MOSFET

General Description


This N-Channel MOSFET has been designed specifically to improve the overall efficiency of DC/DC converters using either synchronous or conventional switching PWM controllers.


These MOSFETs feature faster switching and lower gate charge than other MOSFETs with comparable $R_{\text{DS(ON)}}$ specifications.

The result is a MOSFET that is easy and safer to drive (even at very high frequencies), and DC/DC power supply designs with higher overall efficiency.

Features

- 6.3 A, 100 V. $R_{DS(ON)} = 32 \text{ m}\Omega$ @ $V_{GS} = 10 \text{ V}$ $R_{DS(ON)} = 35 \text{ m}\Omega$ @ $V_{GS} = 6 \text{ V}$
- Low gate charge (57 nC typical)
- · Fast switching speed
- High performance trench technology for extremely low R_{DS(ON)}
- High power and current handling capability





Absolute Maximum Ratings T_A=25°C unless otherwise noted

Symbol	Parameter		Ratings	Units	
V _{DSS}	Drain-Source Voltage		100	V	
V _{GSS}	Gate-Source Voltage		±20	V	
I _D	Drain Current - Continuous	(Note 1a)	6.3	А	
	- Pulsed		50		
P _D	Power Dissipation for Single Operation	(Note 1a)	2.5	W	
		(Note 1b)	1.2		
		(Note 1c)	1.0		
T_J,T_{STG}	Operating and Storage Junction Temperature Range		-55 to +150	°C	

Thermal Characteristics

$R_{\theta JA}$	Thermal Resistance, Junction-to-Ambient	(Note 1a)	50	°C/W
$R_{\theta JC}$	Thermal Resistance, Junction-to-Case	(Note 1)	25	°C/W

Package Marking and Ordering Information

Device Marking	Device	Reel Size	Tape width	Quantity
FDS3670	FDS3670	13"	12mm	2500 units

Symbol	Parameter	Test Conditions	Min	Тур	Max	Units
Drain-Sc	ource Avalanche Ratings (Note	2)		I	l	ı
W _{DSS}	Single Pulse Drain-Source Avalanche Energy	$V_{DD} = 50 \text{ V}, \qquad I_D = 6.3 \text{ A}$			360	mJ
I _{AR}	Maximum Drain-Source Avalanche Current				6.3	Α
Off Char	acteristics					
BV _{DSS}	Drain-Source Breakdown Voltage	$V_{GS} = 0 \text{ V}, I_D = 250 \mu\text{A}$	100			V
<u>ΔBV_{DSS}</u> ΔT _J	Breakdown Voltage Temperature Coefficient	I_D = 250 μ A, Referenced to 25°C		92		mV/°C
I _{DSS}	Zero Gate Voltage Drain Current	$V_{DS} = 80 \text{ V}, \qquad V_{GS} = 0 \text{ V}$			10	μΑ
I _{GSSF}	Gate-Body Leakage, Forward	$V_{GS} = 20 \text{ V}, \qquad V_{DS} = 0 \text{ V}$			100	nA
I _{GSSR}	Gate-Body Leakage, Reverse	$V_{GS} = -20 \text{ V}, V_{DS} = 0 \text{ V}$			-100	nA
On Char	acteristics (Note 2)					
$V_{GS(th)}$	Gate Threshold Voltage	$V_{DS} = V_{GS}, I_D = 250 \mu\text{A}$	2	2.5	4	V
$\Delta V_{GS(th)} \over \Delta T_J$	Gate Threshold Voltage Temperature Coefficient	I_D = 250 μ A, Referenced to 25°C		-7.2		mV/°C
R _{DS(on)}	Static Drain–Source On–Resistance	$V_{GS} = 10 \text{ V}, I_D = 6.3 \text{ A}$ $V_{GS} = 10 \text{ V}, I_D = 6.3 \text{ A}, T_J = 125^{\circ}\text{C}$ $V_{GS} = 6 \text{ V}, I_D = 5.7 \text{ A}$		22 39 24	32 64 35	mΩ
I _{D(on)}	On–State Drain Current	$V_{GS} = 6 \text{ V}, \qquad I_{D} = 5.7 \text{ A}$ $V_{GS} = 10 \text{ V}, \qquad V_{DS} = 5 \text{ V}$	25			Α
g FS	Forward Transconductance	$V_{DS} = 5 \text{ V}, \qquad I_{D} = 6.3 \text{ A}$		31		S
Dynamic	Characteristics					
Ciss	Input Capacitance	$V_{DS} = 50 \text{ V}, \qquad V_{GS} = 0 \text{ V},$		2490		pF
Coss	Output Capacitance	f = 1.0 MHz		265		pF
C _{rss}	Reverse Transfer Capacitance			80		pF
Switchir	ng Characteristics (Note 2)					
t _{d(on)}	Turn-On Delay Time	$V_{DD} = 50 \text{ V}, \qquad I_{D} = 1 \text{ A},$		16	26	ns
t _r	Turn-On Rise Time	$V_{GS} = 10 \text{ V}, \qquad R_{GEN} = 6 \Omega$		10	18	ns
t _{d(off)}	Turn-Off Delay Time			56	84	ns
t _f	Turn-Off Fall Time			25	40	ns
$\overline{Q_g}$	Total Gate Charge	$V_{DS} = 50 \text{ V}, \qquad I_{D} = 25 \text{ A},$		57	80	nC
Q _{gs}	Gate-Source Charge	V _{GS} = 10 V		11		nC
Q _{gd}	Gate-Drain Charge			15		nC
Drain-S	ource Diode Characteristics	and Maximum Ratings				
Is	Maximum Continuous Drain-Source				2.1	Α
V _{SD}	Drain–Source Diode Forward Voltage	$V_{GS} = 0 \text{ V}, I_{S} = 2.1 \text{ A}$ (Note 2)		0.72	1.2	V

Notes

1. $R_{\theta JA}$ is the sum of the junction-to-case and case-to-ambient thermal resistance where the case thermal reference is defined as the solder mounting surface of the drain pins. $R_{\theta JC}$ is guaranteed by design while $R_{\theta CA}$ is determined by the user's board design.



a) 50 °C/W when mounted on a 1in² pad of 2 oz copper

Scale 1 : 1 on letter size paper



b) 105 °C/W when mounted on a 0.04 in² pad of 2 oz copper



c) 125 °C/W when mounted on a minimum pad.

Typical Characteristics

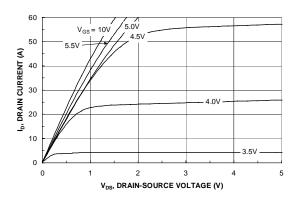


Figure 1. On-Region Characteristics.

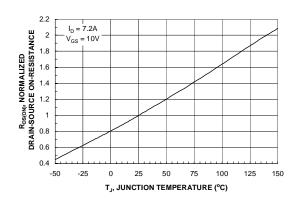


Figure 3. On-Resistance Variation withTemperature.

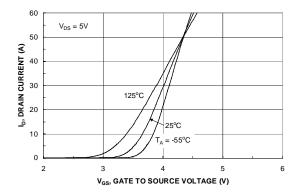


Figure 5. Transfer Characteristics.

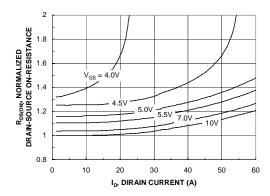


Figure 2. On-Resistance Variation with Drain Current and Gate Voltage.

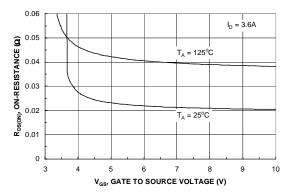


Figure 4. On-Resistance Variation with Gate-to-Source Voltage.

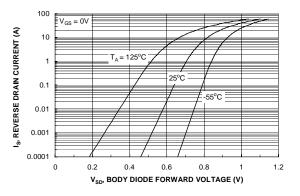


Figure 6. Body Diode Forward Voltage Variation with Source Current and Temperature.

Typical Characteristics

R_{DS(ON)} LIMIT

SINGLE PULSE

 $R_{\theta JA} = 125^{\circ}C/W$


T_A = 25°C

ID, DRAIN CURRENT (A)

10

0.1

0.01 L 0.1

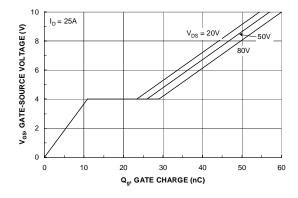

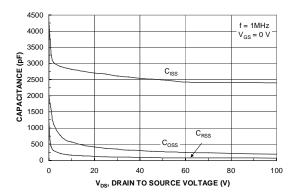


Figure 7. Gate Charge Characteristics.




Figure 8. Capacitance Characteristics.

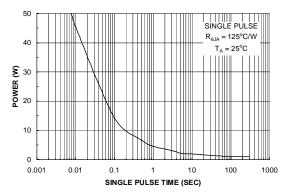


Figure 9. Maximum Safe Operating Area.



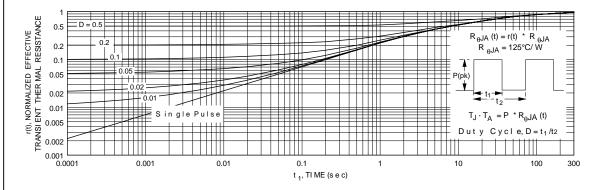


Figure 11. Transient Thermal Response Curve.

Thermal characterization performed using the conditions described in Note 1c. Transient thermal response will change depending on the circuit board design.

TRADEMARKS

The following are registered and unregistered trademarks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

 $ACEx^{TM}$ FASTr™ PowerTrench® SyncFET™ Bottomless™ QFET™ TinyLogic™ GlobalOptoisolator™ QSTM UHC™ CoolFET™ GTO™ **VCX**TM $CROSSVOLT^{TM}$ QT Optoelectronics™ HiSeC™

DOME™ ISOPLANAR™ Quiet Series™

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

PRODUCT STATUS DEFINITIONS

Definition of Terms

Datasheet Identification	Product Status	Definition		
Advance Information Formative or In Design		This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.		
Preliminary	First Production	This datasheet contains preliminary data, and supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.		
No Identification Needed Full Production		This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.		
Obsolete	Not In Production	This datasheet contains specifications on a product that has been discontinued by Fairchild semiconductor. The datasheet is printed for reference information only.		