

Thick Film Chip Resistor 0603



RoHS
Compliant




Features

- Small size and light weight
- Suitable for both wave and reflow soldering
- Reduction of assembly costs

Performance Specification

Temperature Coefficient	: 1Ω to 10Ω ±400PPM/°C 11Ω to 100Ω ±200PPM/°C >100Ω ±100PPM/°C
Short Time Overload	: ±5% : ±(2% +0.1Ω)Max. ±1% : ±(1% +0.1Ω)Max.
Insulation Resistance	: Min. 1,000MΩ
Dielectric Withstanding Voltage	: No evidence of flashover, mechanical damage, arcing or insulation breakdown.
Terminal Bending	: ±(1% +0.05Ω) Max.
Soldering Heat	: ±(1% +0.05Ω) Max.
Solderability	: Min. 95% coverage
Temperature Cycling	: ±5% : ±(1% +0.05Ω) Max. ±1% : ±(0.5% +0.05Ω) Max.
Humidity (Steady State)	: ±5% : ±(3% +0.1Ω) Max. ±1% : ±(0.5% +0.1Ω) Max.
Load Life in Humidity	: ±5% : ±(3% +0.1Ω) Max. ±1% : ±(1% +0.1Ω) Max.
Load Life	: ±5% : ±(3% +0.1Ω) Max. ±1% : ±(1% +0.1Ω) Max.


Derating Curve

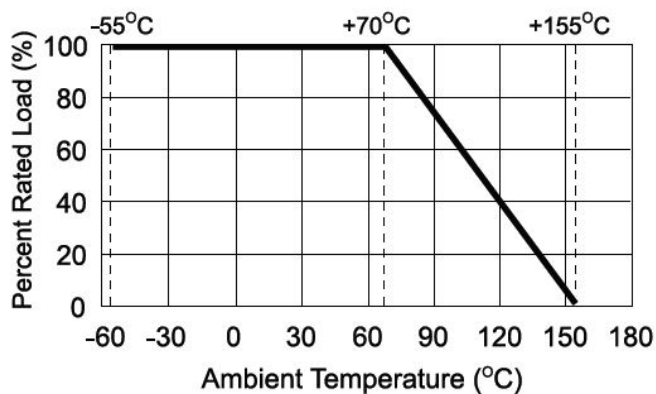

Thick Film Chip Resistor 0603



Dimension

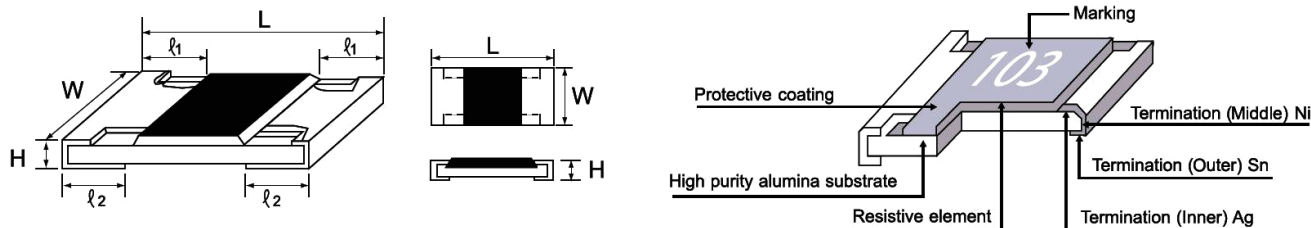

Type	Dimension (mm)				
	L	W	H	ℓ ₁	ℓ ₂
0603	1.6 ±0.1	0.8 ^{+0.15} / _{+0.1}	0.45 ±0.1	0.3 ±0.2	0.3 ±0.2

Type	Power Rating at 70°C	Max. Working Voltage	Max. Overload Voltage	Dielectric Withstanding Voltage	Tolerance %	Resistance Range
0603	1/10W-S 1/16W	1A	2A	-	Jumper	<50mΩ
		50V	100V	300V	±1%	10Ω to 1MΩ
					±2%	1Ω to 10MΩ
					±5%	1Ω to 10MΩ

Part Number Table

Description	Part Number
Resistor, 1K, 0.063W, 1%, 0603, Reel	MC0063W060311K
Resistor, 1K, 0.063W, 1%, 0603	MC0063W060311K
Resistor, 1M, 0.063W, 1%, 0603, Reel	MC0063W060311M
Resistor, 1M, 0.063W, 1%, 0603	MC0063W060311M
Resistor, 1R, 0.063W, 1%, 0603, Reel	MC0063W060311R0
Resistor, 1R, 0.063W, 1%, 0603	MC0063W060311R0
Resistor, 1K05, 0.063W, 1%, 0603, Reel	MC0063W060311K05
Resistor, 1K05, 0.063W, 1%, 0603	MC0063W060311K05
Resistor, 1M05, 0.063W, 1%, 0603, Reel	MC0063W060311M05
Resistor, 1M05, 0.063W, 1%, 0603	MC0063W060311M05
Resistor, 1K1, 0.063W, 1%, 0603, Reel	MC0063W060311K1
Resistor, 1K1, 0.063W, 1%, 0603	MC0063W060311K1
Resistor, 1M1, 0.063W, 1%, 0603, Reel	MC0063W060311M10
Resistor, 1M1, 0.063W, 1%, 0603	MC0063W060311M10
Resistor, 1R1, 0.063W, 1%, 0603, Reel	MC0063W060311R10
Resistor, 1R1, 0.063W, 1%, 0603	MC0063W060311R10
Resistor, 1K15, 0.063W, 1%, 0603, Reel	MC0063W060311K15
Resistor, 1K15, 0.063W, 1%, 0603	MC0063W060311K15

Description	Part Number
Resistor, 1M15, 0.063W, 1%, 0603, Reel	MC0063W060311M15
Resistor, 1M15, 0.063W, 1%, 0603	MC0063W060311M15
Resistor, 1R15, 0.063W, 1%, 0603, Reel	MC0063W060311R15
Resistor, 1R15, 0.063W, 1%, 0603	MC0063W060311R15
Resistor, 1K2, 0.063W, 1%, 0603, Reel	MC0063W060311K2
Resistor, 1K2, 0.063W, 1%, 0603	MC0063W060311K2
Resistor, 1M2, 0.063W, 1%, 0603, Reel	MC0063W060311M20
Resistor, 1M2, 0.063W, 1%, 0603	MC0063W060311M20
Resistor, 1R2, 0.063W, 1%, 0603, Reel	MC0063W060311R20
Resistor, 1R2, 0.063W, 1%, 0603	MC0063W060311R20
Resistor, 1K21, 0.063W, 1%, 0603, Reel	MC0063W060311K21
Resistor, 1K21, 0.063W, 1%, 0603	MC0063W060311K21
Resistor, 1M21, 0.063W, 1%, 0603, Reel	MC0063W060311M21
Resistor, 1M21, 0.063W, 1%, 0603	MC0063W060311M21
Resistor, 1R21, 0.063W, 1%, 0603, Reel	MC0063W060311R21
Resistor, 1R21, 0.063W, 1%, 0603	MC0063W060311R21
Resistor, 1K27, 0.063W, 1%, 0603, Reel	MC0063W060311K27
Resistor, 1K27, 0.063W, 1%, 0603	MC0063W060311K27



Thick Film Chip Resistor 0603



Description	Part Number
Resistor, 1M27, 0.063W, 1%, 0603, Reel	MC0063W060311M27
Resistor, 1M27, 0.063W, 1%, 0603	MC0063W060311M27
Resistor, 1R27, 0.063W, 1%, 0603, Reel	MC0063W060311R27
Resistor, 1R27, 0.063W, 1%, 0603	MC0063W060311R27
Resistor, 1K3, 0.063W, 1%, 0603, Reel	MC0063W060311K3
Resistor, 1K3, 0.063W, 1%, 0603	MC0063W060311K3
Resistor, 1M3, 0.063W, 1%, 0603, Reel	MC0063W060311M30
Resistor, 1M3, 0.063W, 1%, 0603	MC0063W060311M30
Resistor, 1R3, 0.063W, 1%, 0603, Reel	MC0063W060311R30
Resistor, 1R3, 0.063W, 1%, 0603	MC0063W060311R30
Resistor, 1K33, 0.063W, 1%, 0603, Reel	MC0063W060311K33
Resistor, 1K33, 0.063W, 1%, 0603	MC0063W060311K33
Resistor, 1M33, 0.063W, 1%, 0603, Reel	MC0063W060311M33
Resistor, 1M33, 0.063W, 1%, 0603	MC0063W060311M33
Resistor, 1R33, 0.063W, 1%, 0603, Reel	MC0063W060311R33
Resistor, 1R33, 0.063W, 1%, 0603	MC0063W060311R33
Resistor, 1K4, 0.063W, 1%, 0603, Reel	MC0063W060311K4
Resistor, 1K4, 0.063W, 1%, 0603	MC0063W060311K4
Resistor, 1M4, 0.063W, 1%, 0603, Reel	MC0063W060311M40
Resistor, 1M4, 0.063W, 1%, 0603	MC0063W060311M40
Resistor, 1R4, 0.063W, 1%, 0603, Reel	MC0063W060311R40
Resistor, 1R4, 0.063W, 1%, 0603	MC0063W060311R40
Resistor, 1K47, 0.063W, 1%, 0603, Reel	MC0063W060311K47
Resistor, 1K47, 0.063W, 1%, 0603	MC0063W060311K47
Resistor, 1R47, 0.063W, 1%, 0603, Reel	MC0063W060311R47
Resistor, 1R47, 0.063W, 1%, 0603	MC0063W060311R47
Resistor, 1K5, 0.063W, 1%, 0603, Reel	MC0063W060311K5
Resistor, 1K5, 0.063W, 1%, 0603	MC0063W060311K5
Resistor, 1M5, 0.063W, 1%, 0603, Reel	MC0063W060311M50
Resistor, 1M5, 0.063W, 1%, 0603	MC0063W060311M50
Resistor, 1R5, 0.063W, 1%, 0603, Reel	MC0063W060311R5
Resistor, 1R5, 0.063W, 1%, 0603	MC0063W060311R5
Resistor, 1K54, 0.063W, 1%, 0603, Reel	MC0063W060311K54
Resistor, 1K54, 0.063W, 1%, 0603	MC0063W060311K54
Resistor, 1M54, 0.063W, 1%, 0603, Reel	MC0063W060311M54
Resistor, 1M54, 0.063W, 1%, 0603	MC0063W060311M54
Resistor, 1R54, 0.063W, 1%, 0603, Reel	MC0063W060311R54
Resistor, 1R54, 0.063W, 1%, 0603	MC0063W060311R54
Resistor, 1K6, 0.063W, 1%, 0603, Reel	MC0063W060311K6

Description	Part Number
Resistor, 1K6, 0.063W, 1%, 0603	MC0063W060311K6
Resistor, 1M6, 0.063W, 1%, 0603, Reel	MC0063W060311M60
Resistor, 1M6, 0.063W, 1%, 0603	MC0063W060311M60
Resistor, 1R6, 0.063W, 1%, 0603, Reel	MC0063W060311R60
Resistor, 1R6, 0.063W, 1%, 0603	MC0063W060311R60
Resistor, 1K62, 0.063W, 1%, 0603, Reel	MC0063W060311K62
Resistor, 1K62, 0.063W, 1%, 0603	MC0063W060311K62
Resistor, 1M62, 0.063W, 1%, 0603, Reel	MC0063W060311M62
Resistor, 1M62, 0.063W, 1%, 0603	MC0063W060311M62
Resistor, 1R62, 0.063W, 1%, 0603, Reel	MC0063W060311R62
Resistor, 1R62, 0.063W, 1%, 0603	MC0063W060311R62
Resistor, 1K69, 0.063W, 1%, 0603, Reel	MC0063W060311K69
Resistor, 1K69, 0.063W, 1%, 0603	MC0063W060311K69
Resistor, 1M69, 0.063W, 1%, 0603, Reel	MC0063W060311M69
Resistor, 1M69, 0.063W, 1%, 0603	MC0063W060311M69
Resistor, 1K78, 0.063W, 1%, 0603, Reel	MC0063W060311K78
Resistor, 1K78, 0.063W, 1%, 0603	MC0063W060311K78
Resistor, 1M78, 0.063W, 1%, 0603, Reel	MC0063W060311M78
Resistor, 1M78, 0.063W, 1%, 0603	MC0063W060311M78
Resistor, 1R78, 0.063W, 1%, 0603, Reel	MC0063W060311R78
Resistor, 1R78, 0.063W, 1%, 0603	MC0063W060311R78
Resistor, 1K8, 0.063W, 1%, 0603, Reel	MC0063W060311K8
Resistor, 1K8, 0.063W, 1%, 0603	MC0063W060311K8
Resistor, 1M8, 0.063W, 1%, 0603, Reel	MC0063W060311M80
Resistor, 1M8, 0.063W, 1%, 0603	MC0063W060311M80
Resistor, 1R8, 0.063W, 1%, 0603, Reel	MC0063W060311R80
Resistor, 1R8, 0.063W, 1%, 0603	MC0063W060311R80
Resistor, 1K87, 0.063W, 1%, 0603, Reel	MC0063W060311K87
Resistor, 1K87, 0.063W, 1%, 0603	MC0063W060311K87
Resistor, 1M87, 0.063W, 1%, 0603, Reel	MC0063W060311M87
Resistor, 1M87, 0.063W, 1%, 0603	MC0063W060311M87
Resistor, 1R87, 0.063W, 1%, 0603, Reel	MC0063W060311R87
Resistor, 1R87, 0.063W, 1%, 0603	MC0063W060311R87
Resistor, 1K96, 0.063W, 1%, 0603, Reel	MC0063W060311K96
Resistor, 1K96, 0.063W, 1%, 0603	MC0063W060311K96
Resistor, 1R96, 0.063W, 1%, 0603, Reel	MC0063W060311R96
Resistor, 1R96, 0.063W, 1%, 0603	MC0063W060311R96
Resistor, 10K, 0.063W, 1%, 0603, Reel	MC0063W0603110K
Resistor, 10K, 0.063W, 1%, 0603	MC0063W0603110K



Thick Film Chip Resistor 0603



Description	Part Number
Resistor, 10M, 0.063W, 1%, 0603, Reel	MC0063W0603110M0
Resistor, 10M, 0.063W, 1%, 0603	MC0063W0603110M0
Resistor, 10R, 0.063W, 1%, 0603, Reel	MC0063W0603110R
Resistor, 10R, 0.063W, 1%, 0603	MC0063W0603110R
Resistor, 10K5, 0.063W, 1%, 0603, Reel	MC0063W0603110K5
Resistor, 10K5, 0.063W, 1%, 0603	MC0063W0603110K5
Resistor, 10R5, 0.063W, 1%, 0603, Reel	MC0063W0603110R5
Resistor, 10R5, 0.063W, 1%, 0603	MC0063W0603110R5
Resistor, 100K, 0.063W, 1%, 0603, Reel	MC0063W06031100K
Resistor, 100K, 0.063W, 1%, 0603	MC0063W06031100K
Resistor, 100R, 0.063W, 1%, 0603, Reel	MC0063W06031100R
Resistor, 100R, 0.063W, 1%, 0603	MC0063W06031100R
Resistor, 105K, 0.063W, 1%, 0603, Reel	MC0063W06031105K
Resistor, 105K, 0.063W, 1%, 0603	MC0063W06031105K
Resistor, 105R, 0.063W, 1%, 0603, Reel	MC0063W06031105R
Resistor, 105R, 0.063W, 1%, 0603	MC0063W06031105R
Resistor, 11K, 0.063W, 1%, 0603, Reel	MC0063W0603111K
Resistor, 11K, 0.063W, 1%, 0603	MC0063W0603111K
Resistor, 11R, 0.063W, 1%, 0603, Reel	MC0063W0603111R
Resistor, 11R, 0.063W, 1%, 0603	MC0063W0603111R
Resistor, 11K5, 0.063W, 1%, 0603, Reel	MC0063W0603111K5
Resistor, 11K5, 0.063W, 1%, 0603	MC0063W0603111K5
Resistor, 11R5, 0.063W, 1%, 0603, Reel	MC0063W0603111R5
Resistor, 11R5, 0.063W, 1%, 0603	MC0063W0603111R5
Resistor, 110K, 0.063W, 1%, 0603, Reel	MC0063W06031110K
Resistor, 110K, 0.063W, 1%, 0603	MC0063W06031110K
Resistor, 110R, 0.063W, 1%, 0603, Reel	MC0063W06031110R
Resistor, 110R, 0.063W, 1%, 0603	MC0063W06031110R
Resistor, 115K, 0.063W, 1%, 0603, Reel	MC0063W06031115K
Resistor, 115K, 0.063W, 1%, 0603	MC0063W06031115K
Resistor, 115R, 0.063W, 1%, 0603, Reel	MC0063W06031115R
Resistor, 115R, 0.063W, 1%, 0603	MC0063W06031115R
Resistor, 12K, 0.063W, 1%, 0603, Reel	MC0063W0603112K
Resistor, 12K, 0.063W, 1%, 0603	MC0063W0603112K
Resistor, 12R, 0.063W, 1%, 0603, Reel	MC0063W0603112R
Resistor, 12R, 0.063W, 1%, 0603	MC0063W0603112R
Resistor, 12K1, 0.063W, 1%, 0603, Reel	MC0063W0603112K1
Resistor, 12K1, 0.063W, 1%, 0603	MC0063W0603112K1
Resistor, 12R1, 0.063W, 1%, 0603, Reel	MC0063W0603112R1

Description	Part Number
Resistor, 12R1, 0.063W, 1%, 0603	MC0063W0603112R1
Resistor, 12K4, 0.063W, 1%, 0603, Reel	MC0063W0603112K4
Resistor, 12K4, 0.063W, 1%, 0603	MC0063W0603112K4
Resistor, 12K7, 0.063W, 1%, 0603, Reel	MC0063W0603112K7
Resistor, 12K7, 0.063W, 1%, 0603	MC0063W0603112K7
Resistor, 120K, 0.063W, 1%, 0603, Reel	MC0063W06031120K
Resistor, 120K, 0.063W, 1%, 0603	MC0063W06031120K
Resistor, 120R, 0.063W, 1%, 0603, Reel	MC0063W06031120R
Resistor, 120R, 0.063W, 1%, 0603	MC0063W06031120R
Resistor, 121K, 0.063W, 1%, 0603, Reel	MC0063W06031121K
Resistor, 121K, 0.063W, 1%, 0603	MC0063W06031121K
Resistor, 121R, 0.063W, 1%, 0603, Reel	MC0063W06031121R
Resistor, 121R, 0.063W, 1%, 0603	MC0063W06031121R
Resistor, 127K, 0.063W, 1%, 0603, Reel	MC0063W06031127K
Resistor, 127K, 0.063W, 1%, 0603	MC0063W06031127K
Resistor, 127R, 0.063W, 1%, 0603, Reel	MC0063W06031127R
Resistor, 127R, 0.063W, 1%, 0603	MC0063W06031127R
Resistor, 13K, 0.063W, 1%, 0603, Reel	MC0063W0603113K
Resistor, 13K, 0.063W, 1%, 0603	MC0063W0603113K
Resistor, 13R, 0.063W, 1%, 0603, Reel	MC0063W0603113R
Resistor, 13R, 0.063W, 1%, 0603	MC0063W0603113R
Resistor, 13K3, 0.063W, 1%, 0603, Reel	MC0063W0603113K3
Resistor, 13K3, 0.063W, 1%, 0603	MC0063W0603113K3
Resistor, 130K, 0.063W, 1%, 0603, Reel	MC0063W06031130K
Resistor, 130K, 0.063W, 1%, 0603	MC0063W06031130K
Resistor, 130R, 0.063W, 1%, 0603, Reel	MC0063W06031130R
Resistor, 130R, 0.063W, 1%, 0603	MC0063W06031130R
Resistor, 133K, 0.063W, 1%, 0603, Reel	MC0063W06031133K
Resistor, 133K, 0.063W, 1%, 0603	MC0063W06031133K
Resistor, 133R, 0.063W, 1%, 0603, Reel	MC0063W06031133R
Resistor, 133R, 0.063W, 1%, 0603	MC0063W06031133R
Resistor, 14K, 0.063W, 1%, 0603, Reel	MC0063W0603114K
Resistor, 14K, 0.063W, 1%, 0603	MC0063W0603114K
Resistor, 14R, 0.063W, 1%, 0603, Reel	MC0063W0603114R
Resistor, 14R, 0.063W, 1%, 0603	MC0063W0603114R
Resistor, 14K7, 0.063W, 1%, 0603, Reel	MC0063W0603114K7
Resistor, 14K7, 0.063W, 1%, 0603	MC0063W0603114K7
Resistor, 14R7, 0.063W, 1%, 0603, Reel	MC0063W0603114R7
Resistor, 14R7, 0.063W, 1%, 0603	MC0063W0603114R7



Thick Film Chip Resistor 0603



Description	Part Number
Resistor, 140K, 0.063W, 1%, 0603, Reel	MC0063W06031140K
Resistor, 140K, 0.063W, 1%, 0603	MC0063W06031140K
Resistor, 140R, 0.063W, 1%, 0603, Reel	MC0063W06031140R
Resistor, 140R, 0.063W, 1%, 0603	MC0063W06031140R
Resistor, 147K, 0.063W, 1%, 0603, Reel	MC0063W06031147K
Resistor, 147K, 0.063W, 1%, 0603	MC0063W06031147K
Resistor, 147R, 0.063W, 1%, 0603, Reel	MC0063W06031147R
Resistor, 147R, 0.063W, 1%, 0603	MC0063W06031147R
Resistor, 15K, 0.063W, 1%, 0603, Reel	MC0063W0603115K
Resistor, 15K, 0.063W, 1%, 0603	MC0063W0603115K
Resistor, 15R, 0.063W, 1%, 0603, Reel	MC0063W0603115R
Resistor, 15R, 0.063W, 1%, 0603	MC0063W0603115R
Resistor, 15K4, 0.063W, 1%, 0603, Reel	MC0063W0603115K4
Resistor, 15K4, 0.063W, 1%, 0603	MC0063W0603115K4
Resistor, 15R4, 0.063W, 1%, 0603, Reel	MC0063W0603115R4
Resistor, 15R4, 0.063W, 1%, 0603	MC0063W0603115R4
Resistor, 150K, 0.063W, 1%, 0603, Reel	MC0063W06031150K
Resistor, 150K, 0.063W, 1%, 0603	MC0063W06031150K
Resistor, 150R, 0.063W, 1%, 0603, Reel	MC0063W06031150R
Resistor, 150R, 0.063W, 1%, 0603	MC0063W06031150R
Resistor, 154K, 0.063W, 1%, 0603, Reel	MC0063W06031154K
Resistor, 154K, 0.063W, 1%, 0603	MC0063W06031154K
Resistor, 154R, 0.063W, 1%, 0603, Reel	MC0063W06031154R
Resistor, 154R, 0.063W, 1%, 0603	MC0063W06031154R
Resistor, 16K, 0.063W, 1%, 0603, Reel	MC0063W0603116K
Resistor, 16K, 0.063W, 1%, 0603	MC0063W0603116K
Resistor, 16R, 0.063W, 1%, 0603, Reel	MC0063W0603116R
Resistor, 16R, 0.063W, 1%, 0603	MC0063W0603116R
Resistor, 16K2, 0.063W, 1%, 0603, Reel	MC0063W0603116K2
Resistor, 16K2, 0.063W, 1%, 0603	MC0063W0603116K2
Resistor, 16R2, 0.063W, 1%, 0603, Reel	MC0063W0603116R2
Resistor, 16R2, 0.063W, 1%, 0603	MC0063W0603116R2
Resistor, 16K9, 0.063W, 1%, 0603, Reel	MC0063W0603116K9
Resistor, 16K9, 0.063W, 1%, 0603	MC0063W0603116K9
Resistor, 16R9, 0.063W, 1%, 0603, Reel	MC0063W0603116R9
Resistor, 16R9, 0.063W, 1%, 0603	MC0063W0603116R9
Resistor, 160K, 0.063W, 1%, 0603, Reel	MC0063W06031160K
Resistor, 160K, 0.063W, 1%, 0603	MC0063W06031160K
Resistor, 160R, 0.063W, 1%, 0603, Reel	MC0063W06031160R

Description	Part Number
Resistor, 160R, 0.063W, 1%, 0603	MC0063W06031160R
Resistor, 162K, 0.063W, 1%, 0603, Reel	MC0063W06031162K
Resistor, 162K, 0.063W, 1%, 0603	MC0063W06031162K
Resistor, 162R, 0.063W, 1%, 0603, Reel	MC0063W06031162R
Resistor, 162R, 0.063W, 1%, 0603	MC0063W06031162R
Resistor, 169K, 0.063W, 1%, 0603, Reel	MC0063W06031169K
Resistor, 169K, 0.063W, 1%, 0603	MC0063W06031169K
Resistor, 169R, 0.063W, 1%, 0603, Reel	MC0063W06031169R
Resistor, 169R, 0.063W, 1%, 0603	MC0063W06031169R
Resistor, 17K8, 0.063W, 1%, 0603, Reel	MC0063W0603117K8
Resistor, 17K8, 0.063W, 1%, 0603	MC0063W0603117K8
Resistor, 17R8, 0.063W, 1%, 0603, Reel	MC0063W0603117R8
Resistor, 17R8, 0.063W, 1%, 0603	MC0063W0603117R8
Resistor, 178K, 0.063W, 1%, 0603, Reel	MC0063W06031178K
Resistor, 178K, 0.063W, 1%, 0603	MC0063W06031178K
Resistor, 178R, 0.063W, 1%, 0603, Reel	MC0063W06031178R
Resistor, 178R, 0.063W, 1%, 0603	MC0063W06031178R
Resistor, 18K, 0.063W, 1%, 0603, Reel	MC0063W0603118K
Resistor, 18K, 0.063W, 1%, 0603	MC0063W0603118K
Resistor, 18R, 0.063W, 1%, 0603, Reel	MC0063W0603118R
Resistor, 18R, 0.063W, 1%, 0603	MC0063W0603118R
Resistor, 18K7, 0.063W, 1%, 0603, Reel	MC0063W0603118K7
Resistor, 18K7, 0.063W, 1%, 0603	MC0063W0603118K7
Resistor, 18R7, 0.063W, 1%, 0603, Reel	MC0063W0603118R7
Resistor, 18R7, 0.063W, 1%, 0603	MC0063W0603118R7
Resistor, 180K, 0.063W, 1%, 0603, Reel	MC0063W06031180K
Resistor, 180K, 0.063W, 1%, 0603	MC0063W06031180K
Resistor, 180R, 0.063W, 1%, 0603, Reel	MC0063W06031180R
Resistor, 180R, 0.063W, 1%, 0603	MC0063W06031180R
Resistor, 187K, 0.063W, 1%, 0603, Reel	MC0063W06031187K
Resistor, 187K, 0.063W, 1%, 0603	MC0063W06031187K
Resistor, 187R, 0.063W, 1%, 0603, Reel	MC0063W06031187R
Resistor, 187R, 0.063W, 1%, 0603	MC0063W06031187R
Resistor, 19K6, 0.063W, 1%, 0603, Reel	MC0063W0603119K6
Resistor, 19K6, 0.063W, 1%, 0603	MC0063W0603119K6
Resistor, 19R6, 0.063W, 1%, 0603, Reel	MC0063W0603119R6
Resistor, 19R6, 0.063W, 1%, 0603	MC0063W0603119R6
Resistor, 196K, 0.063W, 1%, 0603, Reel	MC0063W06031196K
Resistor, 196K, 0.063W, 1%, 0603	MC0063W06031196K



Thick Film Chip Resistor 0603



Description	Part Number
Resistor, 196R, 0.063W, 1%, 0603, Reel	MC0063W06031196R
Resistor, 196R, 0.063W, 1%, 0603	MC0063W06031196R
Resistor, 2K, 0.063W, 1%, 0603, Reel	MC0063W060312K
Resistor, 2K, 0.063W, 1%, 0603	MC0063W060312K
Resistor, 2M, 0.063W, 1%, 0603, Reel	MC0063W060312M00
Resistor, 2M, 0.063W, 1%, 0603	MC0063W060312M00
Resistor, 2R, 0.063W, 1%, 0603, Reel	MC0063W060312R0
Resistor, 2R, 0.063W, 1%, 0603	MC0063W060312R0
Resistor, 2K05, 0.063W, 1%, 0603, Reel	MC0063W060312K05
Resistor, 2K05, 0.063W, 1%, 0603	MC0063W060312K05
Resistor, 2K15, 0.063W, 1%, 0603, Reel	MC0063W060312K15
Resistor, 2K15, 0.063W, 1%, 0603	MC0063W060312K15
Resistor, 2K2, 0.063W, 1%, 0603, Reel	MC0063W060312K2
Resistor, 2K2, 0.063W, 1%, 0603	MC0063W060312K2
Resistor, 2M2, 0.063W, 1%, 0603, Reel	MC0063W060312M20
Resistor, 2M2, 0.063W, 1%, 0603	MC0063W060312M20
Resistor, 2R2, 0.063W, 1%, 0603, Reel	MC0063W060312R2
Resistor, 2R2, 0.063W, 1%, 0603	MC0063W060312R2
Resistor, 2K26, 0.063W, 1%, 0603, Reel	MC0063W060312K26
Resistor, 2K26, 0.063W, 1%, 0603	MC0063W060312K26
Resistor, 2M26, 0.063W, 1%, 0603, Reel	MC0063W060312M26
Resistor, 2M26, 0.063W, 1%, 0603	MC0063W060312M26
Resistor, 2K37, 0.063W, 1%, 0603, Reel	MC0063W060312K37
Resistor, 2K37, 0.063W, 1%, 0603	MC0063W060312K37
Resistor, 2M37, 0.063W, 1%, 0603, Reel	MC0063W060312M37
Resistor, 2M37, 0.063W, 1%, 0603	MC0063W060312M37
Resistor, 2K4, 0.063W, 1%, 0603, Reel	MC0063W060312K4
Resistor, 2K4, 0.063W, 1%, 0603	MC0063W060312K4
Resistor, 2M4, 0.063W, 1%, 0603, Reel	MC0063W060312M40
Resistor, 2M4, 0.063W, 1%, 0603	MC0063W060312M40
Resistor, 2R4, 0.063W, 1%, 0603, Reel	MC0063W060312R40
Resistor, 2R4, 0.063W, 1%, 0603	MC0063W060312R40
Resistor, 2K49, 0.063W, 1%, 0603, Reel	MC0063W060312K49
Resistor, 2K49, 0.063W, 1%, 0603	MC0063W060312K49
Resistor, 2M49, 0.063W, 1%, 0603, Reel	MC0063W060312M49
Resistor, 2M49, 0.063W, 1%, 0603	MC0063W060312M49
Resistor, 2R49, 0.063W, 1%, 0603, Reel	MC0063W060312R49
Resistor, 2R49, 0.063W, 1%, 0603	MC0063W060312R49
Resistor, 2K61, 0.063W, 1%, 0603, Reel	MC0063W060312K61

Description	Part Number
Resistor, 2K61, 0.063W, 1%, 0603	MC0063W060312K61
Resistor, 2M61, 0.063W, 1%, 0603, Reel	MC0063W060312M61
Resistor, 2M61, 0.063W, 1%, 0603	MC0063W060312M61
Resistor, 2K7, 0.063W, 1%, 0603, Reel	MC0063W060312K7
Resistor, 2K7, 0.063W, 1%, 0603	MC0063W060312K7
Resistor, 2M7, 0.063W, 1%, 0603, Reel	MC0063W060312M70
Resistor, 2M7, 0.063W, 1%, 0603	MC0063W060312M70
Resistor, 2R7, 0.063W, 1%, 0603, Reel	MC0063W060312R70
Resistor, 2R7, 0.063W, 1%, 0603	MC0063W060312R70
Resistor, 2K74, 0.063W, 1%, 0603, Reel	MC0063W060312K74
Resistor, 2K74, 0.063W, 1%, 0603	MC0063W060312K74
Resistor, 2M74, 0.063W, 1%, 0603, Reel	MC0063W060312M74
Resistor, 2M74, 0.063W, 1%, 0603	MC0063W060312M74
Resistor, 2R74, 0.063W, 1%, 0603, Reel	MC0063W060312R74
Resistor, 2R74, 0.063W, 1%, 0603	MC0063W060312R74
Resistor, 2K87, 0.063W, 1%, 0603, Reel	MC0063W060312K87
Resistor, 2K87, 0.063W, 1%, 0603	MC0063W060312K87
Resistor, 2M87, 0.063W, 1%, 0603, Reel	MC0063W060312M87
Resistor, 2M87, 0.063W, 1%, 0603	MC0063W060312M87
Resistor, 2R87, 0.063W, 1%, 0603, Reel	MC0063W060312R87
Resistor, 2R87, 0.063W, 1%, 0603	MC0063W060312R87
Resistor, 20K, 0.063W, 1%, 0603, Reel	MC0063W0603120K
Resistor, 20K, 0.063W, 1%, 0603	MC0063W0603120K
Resistor, 20R, 0.063W, 1%, 0603, Reel	MC0063W0603120R
Resistor, 20R, 0.063W, 1%, 0603	MC0063W0603120R
Resistor, 20K5, 0.063W, 1%, 0603, Reel	MC0063W0603120K5
Resistor, 20K5, 0.063W, 1%, 0603	MC0063W0603120K5
Resistor, 20R5, 0.063W, 1%, 0603, Reel	MC0063W0603120R5
Resistor, 20R5, 0.063W, 1%, 0603	MC0063W0603120R5
Resistor, 200K, 0.063W, 1%, 0603, Reel	MC0063W06031200K
Resistor, 200K, 0.063W, 1%, 0603	MC0063W06031200K
Resistor, 200R, 0.063W, 1%, 0603, Reel	MC0063W06031200R
Resistor, 200R, 0.063W, 1%, 0603	MC0063W06031200R
Resistor, 205K, 0.063W, 1%, 0603, Reel	MC0063W06031205K
Resistor, 205K, 0.063W, 1%, 0603	MC0063W06031205K
Resistor, 205R, 0.063W, 1%, 0603, Reel	MC0063W06031205R
Resistor, 205R, 0.063W, 1%, 0603	MC0063W06031205R
Resistor, 21K5, 0.063W, 1%, 0603, Reel	MC0063W0603121K5
Resistor, 21K5, 0.063W, 1%, 0603	MC0063W0603121K5



Thick Film Chip Resistor 0603



Description	Part Number
Resistor, 21R5, 0.063W, 1%, 0603, Reel	MC0063W0603121R5
Resistor, 21R5, 0.063W, 1%, 0603	MC0063W0603121R5
Resistor, 215K, 0.063W, 1%, 0603, Reel	MC0063W06031215K
Resistor, 215K, 0.063W, 1%, 0603	MC0063W06031215K
Resistor, 215R, 0.063W, 1%, 0603, Reel	MC0063W06031215R
Resistor, 215R, 0.063W, 1%, 0603	MC0063W06031215R
Resistor, 22K, 0.063W, 1%, 0603, Reel	MC0063W0603122K
Resistor, 22K, 0.063W, 1%, 0603	MC0063W0603122K
Resistor, 22R, 0.063W, 1%, 0603, Reel	MC0063W0603122R
Resistor, 22R, 0.063W, 1%, 0603	MC0063W0603122R
Resistor, 22K6, 0.063W, 1%, 0603, Reel	MC0063W0603122K6
Resistor, 22K6, 0.063W, 1%, 0603	MC0063W0603122K6
Resistor, 22R6, 0.063W, 1%, 0603, Reel	MC0063W0603122R6
Resistor, 22R6, 0.063W, 1%, 0603	MC0063W0603122R6
Resistor, 220K, 0.063W, 1%, 0603, Reel	MC0063W06031220K
Resistor, 220K, 0.063W, 1%, 0603	MC0063W06031220K
Resistor, 220R, 0.063W, 1%, 0603, Reel	MC0063W06031220R
Resistor, 220R, 0.063W, 1%, 0603	MC0063W06031220R
Resistor, 226K, 0.063W, 1%, 0603, Reel	MC0063W06031226K
Resistor, 226K, 0.063W, 1%, 0603	MC0063W06031226K
Resistor, 226R, 0.063W, 1%, 0603, Reel	MC0063W06031226R
Resistor, 226R, 0.063W, 1%, 0603	MC0063W06031226R
Resistor, 23K7, 0.063W, 1%, 0603, Reel	MC0063W0603123K7
Resistor, 23K7, 0.063W, 1%, 0603	MC0063W0603123K7
Resistor, 23R7, 0.063W, 1%, 0603, Reel	MC0063W0603123R7
Resistor, 23R7, 0.063W, 1%, 0603	MC0063W0603123R7
Resistor, 237K, 0.063W, 1%, 0603, Reel	MC0063W06031237K
Resistor, 237K, 0.063W, 1%, 0603	MC0063W06031237K
Resistor, 237R, 0.063W, 1%, 0603, Reel	MC0063W06031237R
Resistor, 237R, 0.063W, 1%, 0603	MC0063W06031237R
Resistor, 24K, 0.063W, 1%, 0603, Reel	MC0063W0603124K
Resistor, 24K, 0.063W, 1%, 0603	MC0063W0603124K
Resistor, 24R, 0.063W, 1%, 0603, Reel	MC0063W0603124R
Resistor, 24R, 0.063W, 1%, 0603	MC0063W0603124R
Resistor, 24K9, 0.063W, 1%, 0603, Reel	MC0063W0603124K9
Resistor, 24K9, 0.063W, 1%, 0603	MC0063W0603124K9
Resistor, 24R9, 0.063W, 1%, 0603, Reel	MC0063W0603124R9
Resistor, 24R9, 0.063W, 1%, 0603	MC0063W0603124R9
Resistor, 240K, 0.063W, 1%, 0603, Reel	MC0063W06031240K

Description	Part Number
Resistor, 240K, 0.063W, 1%, 0603	MC0063W06031240K
Resistor, 240R, 0.063W, 1%, 0603, Reel	MC0063W06031240R
Resistor, 240R, 0.063W, 1%, 0603	MC0063W06031240R
Resistor, 249K, 0.063W, 1%, 0603, Reel	MC0063W06031249K
Resistor, 249K, 0.063W, 1%, 0603	MC0063W06031249K
Resistor, 249R, 0.063W, 1%, 0603, Reel	MC0063W06031249R
Resistor, 249R, 0.063W, 1%, 0603	MC0063W06031249R
Resistor, 26K1, 0.063W, 1%, 0603, Reel	MC0063W0603126K1
Resistor, 26K1, 0.063W, 1%, 0603	MC0063W0603126K1
Resistor, 26R1, 0.063W, 1%, 0603, Reel	MC0063W0603126R1
Resistor, 26R1, 0.063W, 1%, 0603	MC0063W0603126R1
Resistor, 261K, 0.063W, 1%, 0603, Reel	MC0063W06031261K
Resistor, 261K, 0.063W, 1%, 0603	MC0063W06031261K
Resistor, 261R, 0.063W, 1%, 0603, Reel	MC0063W06031261R
Resistor, 261R, 0.063W, 1%, 0603	MC0063W06031261R
Resistor, 27K, 0.063W, 1%, 0603, Reel	MC0063W0603127K
Resistor, 27K, 0.063W, 1%, 0603	MC0063W0603127K
Resistor, 27R, 0.063W, 1%, 0603, Reel	MC0063W0603127R
Resistor, 27R, 0.063W, 1%, 0603	MC0063W0603127R
Resistor, 27K4, 0.063W, 1%, 0603, Reel	MC0063W0603127K4
Resistor, 27K4, 0.063W, 1%, 0603	MC0063W0603127K4
Resistor, 27R4, 0.063W, 1%, 0603, Reel	MC0063W0603127R4
Resistor, 27R4, 0.063W, 1%, 0603	MC0063W0603127R4
Resistor, 270K, 0.063W, 1%, 0603, Reel	MC0063W06031270K
Resistor, 270K, 0.063W, 1%, 0603	MC0063W06031270K
Resistor, 270R, 0.063W, 1%, 0603, Reel	MC0063W06031270R
Resistor, 270R, 0.063W, 1%, 0603	MC0063W06031270R
Resistor, 274K, 0.063W, 1%, 0603, Reel	MC0063W06031274K
Resistor, 274K, 0.063W, 1%, 0603	MC0063W06031274K
Resistor, 274R, 0.063W, 1%, 0603, Reel	MC0063W06031274R
Resistor, 274R, 0.063W, 1%, 0603	MC0063W06031274R
Resistor, 28K7, 0.063W, 1%, 0603, Reel	MC0063W0603128K7
Resistor, 28K7, 0.063W, 1%, 0603	MC0063W0603128K7
Resistor, 28R7, 0.063W, 1%, 0603, Reel	MC0063W0603128R7
Resistor, 28R7, 0.063W, 1%, 0603	MC0063W0603128R7
Resistor, 287K, 0.063W, 1%, 0603, Reel	MC0063W06031287K
Resistor, 287K, 0.063W, 1%, 0603	MC0063W06031287K
Resistor, 287R, 0.063W, 1%, 0603, Reel	MC0063W06031287R
Resistor, 287R, 0.063W, 1%, 0603	MC0063W06031287R



Thick Film Chip Resistor 0603



Description	Part Number
Resistor, 3K, 0.063W, 1%, 0603, Reel	MC0063W060313K
Resistor, 3K, 0.063W, 1%, 0603	MC0063W060313K
Resistor, 3M, 0.063W, 1%, 0603, Reel	MC0063W060313M00
Resistor, 3M, 0.063W, 1%, 0603	MC0063W060313M00
Resistor, 3R, 0.063W, 1%, 0603, Reel	MC0063W060313R0
Resistor, 3R, 0.063W, 1%, 0603	MC0063W060313R0
Resistor, 3K01, 0.063W, 1%, 0603, Reel	MC0063W060313K01
Resistor, 3K01, 0.063W, 1%, 0603	MC0063W060313K01
Resistor, 3M01, 0.063W, 1%, 0603, Reel	MC0063W060313M01
Resistor, 3M01, 0.063W, 1%, 0603	MC0063W060313M01
Resistor, 3K16, 0.063W, 1%, 0603, Reel	MC0063W060313K16
Resistor, 3K16, 0.063W, 1%, 0603	MC0063W060313K16
Resistor, 3R16, 0.063W, 1%, 0603, Reel	MC0063W060313R16
Resistor, 3R16, 0.063W, 1%, 0603	MC0063W060313R16
Resistor, 3K3, 0.063W, 1%, 0603, Reel	MC0063W060313K3
Resistor, 3K3, 0.063W, 1%, 0603	MC0063W060313K3
Resistor, 3M3, 0.063W, 1%, 0603, Reel	MC0063W060313M30
Resistor, 3M3, 0.063W, 1%, 0603	MC0063W060313M30
Resistor, 3R3, 0.063W, 1%, 0603, Reel	MC0063W060313R3
Resistor, 3R3, 0.063W, 1%, 0603	MC0063W060313R3
Resistor, 3K32, 0.063W, 1%, 0603, Reel	MC0063W060313K32
Resistor, 3K32, 0.063W, 1%, 0603	MC0063W060313K32
Resistor, 3M32, 0.063W, 1%, 0603, Reel	MC0063W060313M32
Resistor, 3M32, 0.063W, 1%, 0603	MC0063W060313M32
Resistor, 3R32, 0.063W, 1%, 0603, Reel	MC0063W060313R32
Resistor, 3R32, 0.063W, 1%, 0603	MC0063W060313R32
Resistor, 3K48, 0.063W, 1%, 0603, Reel	MC0063W060313K48
Resistor, 3K48, 0.063W, 1%, 0603	MC0063W060313K48
Resistor, 3M48, 0.063W, 1%, 0603, Reel	MC0063W060313M48
Resistor, 3M48, 0.063W, 1%, 0603	MC0063W060313M48
Resistor, 3R48, 0.063W, 1%, 0603, Reel	MC0063W060313R48
Resistor, 3R48, 0.063W, 1%, 0603	MC0063W060313R48
Resistor, 3K6, 0.063W, 1%, 0603, Reel	MC0063W060313K6
Resistor, 3K6, 0.063W, 1%, 0603	MC0063W060313K6
Resistor, 3M6, 0.063W, 1%, 0603, Reel	MC0063W060313M60
Resistor, 3M6, 0.063W, 1%, 0603	MC0063W060313M60
Resistor, 3R6, 0.063W, 1%, 0603, Reel	MC0063W060313R60
Resistor, 3R6, 0.063W, 1%, 0603	MC0063W060313R60
Resistor, 3K65, 0.063W, 1%, 0603, Reel	MC0063W060313K65

Description	Part Number
Resistor, 3K65, 0.063W, 1%, 0603	MC0063W060313K65
Resistor, 3M65, 0.063W, 1%, 0603, Reel	MC0063W060313M65
Resistor, 3M65, 0.063W, 1%, 0603	MC0063W060313M65
Resistor, 3R65, 0.063W, 1%, 0603, Reel	MC0063W060313R65
Resistor, 3R65, 0.063W, 1%, 0603	MC0063W060313R65
Resistor, 3K83, 0.063W, 1%, 0603, Reel	MC0063W060313K83
Resistor, 3K83, 0.063W, 1%, 0603	MC0063W060313K83
Resistor, 3M83, 0.063W, 1%, 0603, Reel	MC0063W060313M83
Resistor, 3M83, 0.063W, 1%, 0603	MC0063W060313M83
Resistor, 3R83, 0.063W, 1%, 0603, Reel	MC0063W060313R83
Resistor, 3R83, 0.063W, 1%, 0603	MC0063W060313R83
Resistor, 3K9, 0.063W, 1%, 0603, Reel	MC0063W060313K9
Resistor, 3K9, 0.063W, 1%, 0603	MC0063W060313K9
Resistor, 3M9, 0.063W, 1%, 0603, Reel	MC0063W060313M90
Resistor, 3M9, 0.063W, 1%, 0603	MC0063W060313M90
Resistor, 3R9, 0.063W, 1%, 0603, Reel	MC0063W060313R90
Resistor, 3R9, 0.063W, 1%, 0603	MC0063W060313R90
Resistor, 30K, 0.063W, 1%, 0603, Reel	MC0063W0603130K
Resistor, 30K, 0.063W, 1%, 0603	MC0063W0603130K
Resistor, 30R, 0.063W, 1%, 0603, Reel	MC0063W0603130R
Resistor, 30R, 0.063W, 1%, 0603	MC0063W0603130R
Resistor, 30K1, 0.063W, 1%, 0603, Reel	MC0063W0603130K1
Resistor, 30K1, 0.063W, 1%, 0603	MC0063W0603130K1
Resistor, 30R1, 0.063W, 1%, 0603, Reel	MC0063W0603130R1
Resistor, 30R1, 0.063W, 1%, 0603	MC0063W0603130R1
Resistor, 300K, 0.063W, 1%, 0603, Reel	MC0063W06031300K
Resistor, 300K, 0.063W, 1%, 0603	MC0063W06031300K
Resistor, 300R, 0.063W, 1%, 0603, Reel	MC0063W06031300R
Resistor, 300R, 0.063W, 1%, 0603	MC0063W06031300R
Resistor, 301K, 0.063W, 1%, 0603, Reel	MC0063W06031301K
Resistor, 301K, 0.063W, 1%, 0603	MC0063W06031301K
Resistor, 301R, 0.063W, 1%, 0603, Reel	MC0063W06031301R
Resistor, 301R, 0.063W, 1%, 0603	MC0063W06031301R
Resistor, 31K6, 0.063W, 1%, 0603, Reel	MC0063W0603131K6
Resistor, 31K6, 0.063W, 1%, 0603	MC0063W0603131K6
Resistor, 31R6, 0.063W, 1%, 0603, Reel	MC0063W0603131R6
Resistor, 31R6, 0.063W, 1%, 0603	MC0063W0603131R6
Resistor, 316K, 0.063W, 1%, 0603, Reel	MC0063W06031316K
Resistor, 316K, 0.063W, 1%, 0603	MC0063W06031316K



Thick Film Chip Resistor 0603



Description	Part Number
Resistor, 316R, 0.063W, 1%, 0603, Reel	MC0063W06031316R
Resistor, 316R, 0.063W, 1%, 0603	MC0063W06031316R
Resistor, 33K, 0.063W, 1%, 0603, Reel	MC0063W0603133K
Resistor, 33K, 0.063W, 1%, 0603	MC0063W0603133K
Resistor, 33R, 0.063W, 1%, 0603, Reel	MC0063W0603133R
Resistor, 33R, 0.063W, 1%, 0603	MC0063W0603133R
Resistor, 33K2, 0.063W, 1%, 0603, Reel	MC0063W0603133K2
Resistor, 33K2, 0.063W, 1%, 0603	MC0063W0603133K2
Resistor, 33R2, 0.063W, 1%, 0603, Reel	MC0063W0603133R2
Resistor, 33R2, 0.063W, 1%, 0603	MC0063W0603133R2
Resistor, 330K, 0.063W, 1%, 0603, Reel	MC0063W06031330K
Resistor, 330K, 0.063W, 1%, 0603	MC0063W06031330K
Resistor, 330R, 0.063W, 1%, 0603, Reel	MC0063W06031330R
Resistor, 330R, 0.063W, 1%, 0603	MC0063W06031330R
Resistor, 332K, 0.063W, 1%, 0603, Reel	MC0063W06031332K
Resistor, 332K, 0.063W, 1%, 0603	MC0063W06031332K
Resistor, 332R, 0.063W, 1%, 0603, Reel	MC0063W06031332R
Resistor, 332R, 0.063W, 1%, 0603	MC0063W06031332R
Resistor, 34K8, 0.063W, 1%, 0603, Reel	MC0063W0603134K8
Resistor, 34K8, 0.063W, 1%, 0603	MC0063W0603134K8
Resistor, 34R8, 0.063W, 1%, 0603, Reel	MC0063W0603134R8
Resistor, 34R8, 0.063W, 1%, 0603	MC0063W0603134R8
Resistor, 348K, 0.063W, 1%, 0603, Reel	MC0063W06031348K
Resistor, 348K, 0.063W, 1%, 0603	MC0063W06031348K
Resistor, 348R, 0.063W, 1%, 0603, Reel	MC0063W06031348R
Resistor, 348R, 0.063W, 1%, 0603	MC0063W06031348R
Resistor, 36K, 0.063W, 1%, 0603, Reel	MC0063W0603136K
Resistor, 36K, 0.063W, 1%, 0603	MC0063W0603136K
Resistor, 36R, 0.063W, 1%, 0603, Reel	MC0063W0603136R
Resistor, 36R, 0.063W, 1%, 0603	MC0063W0603136R
Resistor, 36K5, 0.063W, 1%, 0603, Reel	MC0063W0603136K5
Resistor, 36K5, 0.063W, 1%, 0603	MC0063W0603136K5
Resistor, 36R5, 0.063W, 1%, 0603, Reel	MC0063W0603136R5
Resistor, 36R5, 0.063W, 1%, 0603	MC0063W0603136R5
Resistor, 360K, 0.063W, 1%, 0603, Reel	MC0063W06031360K
Resistor, 360K, 0.063W, 1%, 0603	MC0063W06031360K
Resistor, 360R, 0.063W, 1%, 0603, Reel	MC0063W06031360R
Resistor, 360R, 0.063W, 1%, 0603	MC0063W06031360R
Resistor, 365K, 0.063W, 1%, 0603, Reel	MC0063W06031365K

Description	Part Number
Resistor, 365K, 0.063W, 1%, 0603	MC0063W06031365K
Resistor, 365R, 0.063W, 1%, 0603, Reel	MC0063W06031365R
Resistor, 365R, 0.063W, 1%, 0603	MC0063W06031365R
Resistor, 38K3, 0.063W, 1%, 0603, Reel	MC0063W0603138K3
Resistor, 38K3, 0.063W, 1%, 0603	MC0063W0603138K3
Resistor, 38R3, 0.063W, 1%, 0603, Reel	MC0063W0603138R3
Resistor, 38R3, 0.063W, 1%, 0603	MC0063W0603138R3
Resistor, 383R, 0.063W, 1%, 0603, Reel	MC0063W06031383R
Resistor, 383R, 0.063W, 1%, 0603	MC0063W06031383R
Resistor, 39K, 0.063W, 1%, 0603, Reel	MC0063W0603139K
Resistor, 39K, 0.063W, 1%, 0603	MC0063W0603139K
Resistor, 39R, 0.063W, 1%, 0603, Reel	MC0063W0603139R
Resistor, 39R, 0.063W, 1%, 0603	MC0063W0603139R
Resistor, 390K, 0.063W, 1%, 0603, Reel	MC0063W06031390K
Resistor, 390K, 0.063W, 1%, 0603	MC0063W06031390K
Resistor, 390R, 0.063W, 1%, 0603, Reel	MC0063W06031390R
Resistor, 390R, 0.063W, 1%, 0603	MC0063W06031390R
Resistor, 4K02, 0.063W, 1%, 0603, Reel	MC0063W060314K02
Resistor, 4K02, 0.063W, 1%, 0603	MC0063W060314K02
Resistor, 4M02, 0.063W, 1%, 0603, Reel	MC0063W060314M02
Resistor, 4M02, 0.063W, 1%, 0603	MC0063W060314M02
Resistor, 4K22, 0.063W, 1%, 0603, Reel	MC0063W060314K22
Resistor, 4K22, 0.063W, 1%, 0603	MC0063W060314K22
Resistor, 4R22, 0.063W, 1%, 0603, Reel	MC0063W060314R22
Resistor, 4R22, 0.063W, 1%, 0603	MC0063W060314R22
Resistor, 4K3, 0.063W, 1%, 0603, Reel	MC0063W060314K3
Resistor, 4K3, 0.063W, 1%, 0603	MC0063W060314K3
Resistor, 4M3, 0.063W, 1%, 0603, Reel	MC0063W060314M30
Resistor, 4M3, 0.063W, 1%, 0603	MC0063W060314M30
Resistor, 4R3, 0.063W, 1%, 0603, Reel	MC0063W060314R30
Resistor, 4R3, 0.063W, 1%, 0603	MC0063W060314R30
Resistor, 4K42, 0.063W, 1%, 0603, Reel	MC0063W060314K42
Resistor, 4K42, 0.063W, 1%, 0603	MC0063W060314K42
Resistor, 4M42, 0.063W, 1%, 0603, Reel	MC0063W060314M42
Resistor, 4M42, 0.063W, 1%, 0603	MC0063W060314M42
Resistor, 4R42, 0.063W, 1%, 0603, Reel	MC0063W060314R42
Resistor, 4R42, 0.063W, 1%, 0603	MC0063W060314R42
Resistor, 4K64, 0.063W, 1%, 0603, Reel	MC0063W060314K64
Resistor, 4K64, 0.063W, 1%, 0603	MC0063W060314K64



Thick Film Chip Resistor 0603



Description	Part Number
Resistor, 4M64, 0.063W, 1%, 0603, Reel	MC0063W060314M64
Resistor, 4M64, 0.063W, 1%, 0603	MC0063W060314M64
Resistor, 4R64, 0.063W, 1%, 0603, Reel	MC0063W060314R64
Resistor, 4R64, 0.063W, 1%, 0603	MC0063W060314R64
Resistor, 4K7, 0.063W, 1%, 0603, Reel	MC0063W060314K7
Resistor, 4K7, 0.063W, 1%, 0603	MC0063W060314K7
Resistor, 4M7, 0.063W, 1%, 0603, Reel	MC0063W060314M70
Resistor, 4M7, 0.063W, 1%, 0603	MC0063W060314M70
Resistor, 4R7, 0.063W, 1%, 0603, Reel	MC0063W060314R7
Resistor, 4R7, 0.063W, 1%, 0603	MC0063W060314R7
Resistor, 4K75, 0.063W, 1%, 0603, Reel	MC0063W060314K75
Resistor, 4K75, 0.063W, 1%, 0603	MC0063W060314K75
Resistor, 4K87, 0.063W, 1%, 0603, Reel	MC0063W060314K87
Resistor, 4K87, 0.063W, 1%, 0603	MC0063W060314K87
Resistor, 4R87, 0.063W, 1%, 0603, Reel	MC0063W060314R87
Resistor, 4R87, 0.063W, 1%, 0603	MC0063W060314R87
Resistor, 4K99, 0.063W, 1%, 0603, Reel	MC0063W060314K99
Resistor, 4K99, 0.063W, 1%, 0603	MC0063W060314K99
Resistor, 40K2, 0.063W, 1%, 0603, Reel	MC0063W0603140K2
Resistor, 40K2, 0.063W, 1%, 0603	MC0063W0603140K2
Resistor, 40R2, 0.063W, 1%, 0603, Reel	MC0063W0603140R2
Resistor, 40R2, 0.063W, 1%, 0603	MC0063W0603140R2
Resistor, 402K, 0.063W, 1%, 0603, Reel	MC0063W06031402K
Resistor, 402K, 0.063W, 1%, 0603	MC0063W06031402K
Resistor, 402R, 0.063W, 1%, 0603, Reel	MC0063W06031402R
Resistor, 402R, 0.063W, 1%, 0603	MC0063W06031402R
Resistor, 42K2, 0.063W, 1%, 0603, Reel	MC0063W0603142K2
Resistor, 42K2, 0.063W, 1%, 0603	MC0063W0603142K2
Resistor, 42R2, 0.063W, 1%, 0603, Reel	MC0063W0603142R2
Resistor, 42R2, 0.063W, 1%, 0603	MC0063W0603142R2
Resistor, 422K, 0.063W, 1%, 0603, Reel	MC0063W06031422K
Resistor, 422K, 0.063W, 1%, 0603	MC0063W06031422K
Resistor, 422R, 0.063W, 1%, 0603, Reel	MC0063W06031422R
Resistor, 422R, 0.063W, 1%, 0603	MC0063W06031422R
Resistor, 43K, 0.063W, 1%, 0603, Reel	MC0063W0603143K
Resistor, 43K, 0.063W, 1%, 0603	MC0063W0603143K
Resistor, 43R, 0.063W, 1%, 0603, Reel	MC0063W0603143R
Resistor, 43R, 0.063W, 1%, 0603	MC0063W0603143R
Resistor, 430K, 0.063W, 1%, 0603, Reel	MC0063W06031430K

Description	Part Number
Resistor, 430K, 0.063W, 1%, 0603	MC0063W06031430K
Resistor, 430R, 0.063W, 1%, 0603, Reel	MC0063W06031430R
Resistor, 430R, 0.063W, 1%, 0603	MC0063W06031430R
Resistor, 44K2, 0.063W, 1%, 0603, Reel	MC0063W0603144K2
Resistor, 44K2, 0.063W, 1%, 0603	MC0063W0603144K2
Resistor, 44R2, 0.063W, 1%, 0603, Reel	MC0063W0603144R2
Resistor, 44R2, 0.063W, 1%, 0603	MC0063W0603144R2
Resistor, 442K, 0.063W, 1%, 0603, Reel	MC0063W06031442K
Resistor, 442K, 0.063W, 1%, 0603	MC0063W06031442K
Resistor, 442R, 0.063W, 1%, 0603, Reel	MC0063W06031442R
Resistor, 442R, 0.063W, 1%, 0603	MC0063W06031442R
Resistor, 46K4, 0.063W, 1%, 0603, Reel	MC0063W0603146K4
Resistor, 46K4, 0.063W, 1%, 0603	MC0063W0603146K4
Resistor, 46R4, 0.063W, 1%, 0603, Reel	MC0063W0603146R4
Resistor, 46R4, 0.063W, 1%, 0603	MC0063W0603146R4
Resistor, 464K, 0.063W, 1%, 0603, Reel	MC0063W06031464K
Resistor, 464K, 0.063W, 1%, 0603	MC0063W06031464K
Resistor, 464R, 0.063W, 1%, 0603, Reel	MC0063W06031464R
Resistor, 464R, 0.063W, 1%, 0603	MC0063W06031464R
Resistor, 47K, 0.063W, 1%, 0603, Reel	MC0063W0603147K
Resistor, 47K, 0.063W, 1%, 0603	MC0063W0603147K
Resistor, 47R, 0.063W, 1%, 0603, Reel	MC0063W0603147R
Resistor, 47R, 0.063W, 1%, 0603	MC0063W0603147R
Resistor, 47K5, 0.063W, 1%, 0603, Reel	MC0063W0603147K5
Resistor, 47K5, 0.063W, 1%, 0603	MC0063W0603147K5
Resistor, 470K, 0.063W, 1%, 0603, Reel	MC0063W06031470K
Resistor, 470K, 0.063W, 1%, 0603	MC0063W06031470K
Resistor, 470R, 0.063W, 1%, 0603, Reel	MC0063W06031470R
Resistor, 470R, 0.063W, 1%, 0603	MC0063W06031470R
Resistor, 475R, 0.063W, 1%, 0603, Reel	MC0063W06031475R
Resistor, 475R, 0.063W, 1%, 0603	MC0063W06031475R
Resistor, 48K7, 0.063W, 1%, 0603, Reel	MC0063W0603148K7
Resistor, 48K7, 0.063W, 1%, 0603	MC0063W0603148K7
Resistor, 48R7, 0.063W, 1%, 0603, Reel	MC0063W0603148R7
Resistor, 48R7, 0.063W, 1%, 0603	MC0063W0603148R7
Resistor, 487K, 0.063W, 1%, 0603, Reel	MC0063W06031487K
Resistor, 487K, 0.063W, 1%, 0603	MC0063W06031487K
Resistor, 487R, 0.063W, 1%, 0603, Reel	MC0063W06031487R
Resistor, 487R, 0.063W, 1%, 0603	MC0063W06031487R



Thick Film Chip Resistor 0603



Description	Part Number
Resistor, 49K9, 0.063W, 1%, 0603, Reel	MC0063W0603149K9
Resistor, 49K9, 0.063W, 1%, 0603	MC0063W0603149K9
Resistor, 49R9, 0.063W, 1%, 0603, Reel	MC0063W0603149R9
Resistor, 49R9, 0.063W, 1%, 0603	MC0063W0603149R9
Resistor, 499K, 0.063W, 1%, 0603, Reel	MC0063W06031499K
Resistor, 499K, 0.063W, 1%, 0603	MC0063W06031499K
Resistor, 5K1, 0.063W, 1%, 0603, Reel	MC0063W060315K1
Resistor, 5K1, 0.063W, 1%, 0603	MC0063W060315K1
Resistor, 5M1, 0.063W, 1%, 0603, Reel	MC0063W060315M10
Resistor, 5M1, 0.063W, 1%, 0603	MC0063W060315M10
Resistor, 5R1, 0.063W, 1%, 0603, Reel	MC0063W060315R10
Resistor, 5R1, 0.063W, 1%, 0603	MC0063W060315R10
Resistor, 5K11, 0.063W, 1%, 0603, Reel	MC0063W060315K11
Resistor, 5K11, 0.063W, 1%, 0603	MC0063W060315K11
Resistor, 5M11, 0.063W, 1%, 0603, Reel	MC0063W060315M11
Resistor, 5M11, 0.063W, 1%, 0603	MC0063W060315M11
Resistor, 5R11, 0.063W, 1%, 0603, Reel	MC0063W060315R11
Resistor, 5R11, 0.063W, 1%, 0603	MC0063W060315R11
Resistor, 5K36, 0.063W, 1%, 0603, Reel	MC0063W060315K36
Resistor, 5K36, 0.063W, 1%, 0603	MC0063W060315K36
Resistor, 5K6, 0.063W, 1%, 0603, Reel	MC0063W060315K6
Resistor, 5K6, 0.063W, 1%, 0603	MC0063W060315K6
Resistor, 5M6, 0.063W, 1%, 0603, Reel	MC0063W060315M60
Resistor, 5M6, 0.063W, 1%, 0603	MC0063W060315M60
Resistor, 5R6, 0.063W, 1%, 0603, Reel	MC0063W060315R60
Resistor, 5R6, 0.063W, 1%, 0603	MC0063W060315R60
Resistor, 5K62, 0.063W, 1%, 0603, Reel	MC0063W060315K62
Resistor, 5K62, 0.063W, 1%, 0603	MC0063W060315K62
Resistor, 5M62, 0.063W, 1%, 0603, Reel	MC0063W060315M62
Resistor, 5M62, 0.063W, 1%, 0603	MC0063W060315M62
Resistor, 5R62, 0.063W, 1%, 0603, Reel	MC0063W060315R62
Resistor, 5R62, 0.063W, 1%, 0603	MC0063W060315R62
Resistor, 5K9, 0.063W, 1%, 0603, Reel	MC0063W060315K9
Resistor, 5K9, 0.063W, 1%, 0603	MC0063W060315K9
Resistor, 5M9, 0.063W, 1%, 0603, Reel	MC0063W060315M90
Resistor, 5M9, 0.063W, 1%, 0603	MC0063W060315M90
Resistor, 5R9, 0.063W, 1%, 0603, Reel	MC0063W060315R90
Resistor, 5R9, 0.063W, 1%, 0603	MC0063W060315R90
Resistor, 51K, 0.063W, 1%, 0603, Reel	MC0063W0603151K

Description	Part Number
Resistor, 51K, 0.063W, 1%, 0603	MC0063W0603151K
Resistor, 51R, 0.063W, 1%, 0603, Reel	MC0063W0603151R
Resistor, 51R, 0.063W, 1%, 0603	MC0063W0603151R
Resistor, 51K1, 0.063W, 1%, 0603, Reel	MC0063W0603151K1
Resistor, 51K1, 0.063W, 1%, 0603	MC0063W0603151K1
Resistor, 51R1, 0.063W, 1%, 0603, Reel	MC0063W0603151R1
Resistor, 51R1, 0.063W, 1%, 0603	MC0063W0603151R1
Resistor, 510K, 0.063W, 1%, 0603, Reel	MC0063W06031510K
Resistor, 510K, 0.063W, 1%, 0603	MC0063W06031510K
Resistor, 510R, 0.063W, 1%, 0603, Reel	MC0063W06031510R
Resistor, 510R, 0.063W, 1%, 0603	MC0063W06031510R
Resistor, 511K, 0.063W, 1%, 0603, Reel	MC0063W06031511K
Resistor, 511K, 0.063W, 1%, 0603	MC0063W06031511K
Resistor, 511R, 0.063W, 1%, 0603, Reel	MC0063W06031511R
Resistor, 511R, 0.063W, 1%, 0603	MC0063W06031511R
Resistor, 53K6, 0.063W, 1%, 0603, Reel	MC0063W0603153K6
Resistor, 53K6, 0.063W, 1%, 0603	MC0063W0603153K6
Resistor, 53R6, 0.063W, 1%, 0603, Reel	MC0063W0603153R6
Resistor, 53R6, 0.063W, 1%, 0603	MC0063W0603153R6
Resistor, 536K, 0.063W, 1%, 0603, Reel	MC0063W06031536K
Resistor, 536K, 0.063W, 1%, 0603	MC0063W06031536K
Resistor, 536R, 0.063W, 1%, 0603, Reel	MC0063W06031536R
Resistor, 536R, 0.063W, 1%, 0603	MC0063W06031536R
Resistor, 56K, 0.063W, 1%, 0603, Reel	MC0063W0603156K
Resistor, 56K, 0.063W, 1%, 0603	MC0063W0603156K
Resistor, 56R, 0.063W, 1%, 0603, Reel	MC0063W0603156R
Resistor, 56R, 0.063W, 1%, 0603	MC0063W0603156R
Resistor, 56K2, 0.063W, 1%, 0603, Reel	MC0063W0603156K2
Resistor, 56K2, 0.063W, 1%, 0603	MC0063W0603156K2
Resistor, 56R2, 0.063W, 1%, 0603, Reel	MC0063W0603156R2
Resistor, 56R2, 0.063W, 1%, 0603	MC0063W0603156R2
Resistor, 560K, 0.063W, 1%, 0603, Reel	MC0063W06031560K
Resistor, 560K, 0.063W, 1%, 0603	MC0063W06031560K
Resistor, 560R, 0.063W, 1%, 0603, Reel	MC0063W06031560R
Resistor, 560R, 0.063W, 1%, 0603	MC0063W06031560R
Resistor, 562K, 0.063W, 1%, 0603, Reel	MC0063W06031562K
Resistor, 562K, 0.063W, 1%, 0603	MC0063W06031562K
Resistor, 562R, 0.063W, 1%, 0603, Reel	MC0063W06031562R
Resistor, 562R, 0.063W, 1%, 0603	MC0063W06031562R



Thick Film Chip Resistor 0603



Description	Part Number
Resistor, 59K, 0.063W, 1%, 0603, Reel	MC0063W0603159K
Resistor, 59K, 0.063W, 1%, 0603	MC0063W0603159K
Resistor, 59R, 0.063W, 1%, 0603, Reel	MC0063W0603159R
Resistor, 59R, 0.063W, 1%, 0603	MC0063W0603159R
Resistor, 590K, 0.063W, 1%, 0603, Reel	MC0063W06031590K
Resistor, 590K, 0.063W, 1%, 0603	MC0063W06031590K
Resistor, 590R, 0.063W, 1%, 0603, Reel	MC0063W06031590R
Resistor, 590R, 0.063W, 1%, 0603	MC0063W06031590R
Resistor, 6K04, 0.063W, 1%, 0603, Reel	MC0063W060316K04
Resistor, 6K04, 0.063W, 1%, 0603	MC0063W060316K04
Resistor, 6K19, 0.063W, 1%, 0603, Reel	MC0063W060316K19
Resistor, 6K19, 0.063W, 1%, 0603	MC0063W060316K19
Resistor, 6R19, 0.063W, 1%, 0603, Reel	MC0063W060316R19
Resistor, 6R19, 0.063W, 1%, 0603	MC0063W060316R19
Resistor, 6K2, 0.063W, 1%, 0603, Reel	MC0063W060316K2
Resistor, 6K2, 0.063W, 1%, 0603	MC0063W060316K2
Resistor, 6M2, 0.063W, 1%, 0603, Reel	MC0063W060316M20
Resistor, 6M2, 0.063W, 1%, 0603	MC0063W060316M20
Resistor, 6R2, 0.063W, 1%, 0603, Reel	MC0063W060316R20
Resistor, 6R2, 0.063W, 1%, 0603	MC0063W060316R20
Resistor, 6K49, 0.063W, 1%, 0603, Reel	MC0063W060316K49
Resistor, 6K49, 0.063W, 1%, 0603	MC0063W060316K49
Resistor, 6M49, 0.063W, 1%, 0603, Reel	MC0063W060316M49
Resistor, 6M49, 0.063W, 1%, 0603	MC0063W060316M49
Resistor, 6R49, 0.063W, 1%, 0603, Reel	MC0063W060316R49
Resistor, 6R49, 0.063W, 1%, 0603	MC0063W060316R49
Resistor, 6K8, 0.063W, 1%, 0603, Reel	MC0063W060316K8
Resistor, 6K8, 0.063W, 1%, 0603	MC0063W060316K8
Resistor, 6M8, 0.063W, 1%, 0603, Reel	MC0063W060316M80
Resistor, 6M8, 0.063W, 1%, 0603	MC0063W060316M80
Resistor, 6R8, 0.063W, 1%, 0603, Reel	MC0063W060316R8
Resistor, 6R8, 0.063W, 1%, 0603	MC0063W060316R8
Resistor, 6K81, 0.063W, 1%, 0603, Reel	MC0063W060316K81
Resistor, 6K81, 0.063W, 1%, 0603	MC0063W060316K81
Resistor, 6R81, 0.063W, 1%, 0603, Reel	MC0063W060316R81
Resistor, 6R81, 0.063W, 1%, 0603	MC0063W060316R81
Resistor, 61K9, 0.063W, 1%, 0603, Reel	MC0063W0603161K9
Resistor, 61K9, 0.063W, 1%, 0603	MC0063W0603161K9
Resistor, 61R9, 0.063W, 1%, 0603, Reel	MC0063W0603161R9

Description	Part Number
Resistor, 61R9, 0.063W, 1%, 0603	MC0063W0603161R9
Resistor, 619K, 0.063W, 1%, 0603, Reel	MC0063W06031619K
Resistor, 619K, 0.063W, 1%, 0603	MC0063W06031619K
Resistor, 619R, 0.063W, 1%, 0603, Reel	MC0063W06031619R
Resistor, 619R, 0.063W, 1%, 0603	MC0063W06031619R
Resistor, 62K, 0.063W, 1%, 0603, Reel	MC0063W0603162K
Resistor, 62K, 0.063W, 1%, 0603	MC0063W0603162K
Resistor, 62R, 0.063W, 1%, 0603, Reel	MC0063W0603162R
Resistor, 62R, 0.063W, 1%, 0603	MC0063W0603162R
Resistor, 620K, 0.063W, 1%, 0603, Reel	MC0063W06031620K
Resistor, 620K, 0.063W, 1%, 0603	MC0063W06031620K
Resistor, 620R, 0.063W, 1%, 0603, Reel	MC0063W06031620R
Resistor, 620R, 0.063W, 1%, 0603	MC0063W06031620R
Resistor, 64K9, 0.063W, 1%, 0603, Reel	MC0063W0603164K9
Resistor, 64K9, 0.063W, 1%, 0603	MC0063W0603164K9
Resistor, 64R9, 0.063W, 1%, 0603, Reel	MC0063W0603164R9
Resistor, 64R9, 0.063W, 1%, 0603	MC0063W0603164R9
Resistor, 649K, 0.063W, 1%, 0603, Reel	MC0063W06031649K
Resistor, 649K, 0.063W, 1%, 0603	MC0063W06031649K
Resistor, 649R, 0.063W, 1%, 0603, Reel	MC0063W06031649R
Resistor, 649R, 0.063W, 1%, 0603	MC0063W06031649R
Resistor, 68K, 0.063W, 1%, 0603, Reel	MC0063W0603168K
Resistor, 68K, 0.063W, 1%, 0603	MC0063W0603168K
Resistor, 68R, 0.063W, 1%, 0603, Reel	MC0063W0603168R
Resistor, 68R, 0.063W, 1%, 0603	MC0063W0603168R
Resistor, 68K1, 0.063W, 1%, 0603, Reel	MC0063W0603168K1
Resistor, 68K1, 0.063W, 1%, 0603	MC0063W0603168K1
Resistor, 68R1, 0.063W, 1%, 0603, Reel	MC0063W0603168R1
Resistor, 68R1, 0.063W, 1%, 0603	MC0063W0603168R1
Resistor, 680K, 0.063W, 1%, 0603, Reel	MC0063W06031680K
Resistor, 680K, 0.063W, 1%, 0603	MC0063W06031680K
Resistor, 680R, 0.063W, 1%, 0603, Reel	MC0063W06031680R
Resistor, 680R, 0.063W, 1%, 0603	MC0063W06031680R
Resistor, 681K, 0.063W, 1%, 0603, Reel	MC0063W06031681K
Resistor, 681K, 0.063W, 1%, 0603	MC0063W06031681K
Resistor, 681R, 0.063W, 1%, 0603, Reel	MC0063W06031681R
Resistor, 681R, 0.063W, 1%, 0603	MC0063W06031681R
Resistor, 7K15, 0.063W, 1%, 0603, Reel	MC0063W060317K15
Resistor, 7K15, 0.063W, 1%, 0603	MC0063W060317K15



Thick Film Chip Resistor 0603



Description	Part Number
Resistor, 7R15, 0.063W, 1%, 0603, Reel	MC0063W060317R15
Resistor, 7R15, 0.063W, 1%, 0603	MC0063W060317R15
Resistor, 7K5, 0.063W, 1%, 0603, Reel	MC0063W060317K5
Resistor, 7K5, 0.063W, 1%, 0603	MC0063W060317K5
Resistor, 7M5, 0.063W, 1%, 0603, Reel	MC0063W060317M50
Resistor, 7M5, 0.063W, 1%, 0603	MC0063W060317M50
Resistor, 7R5, 0.063W, 1%, 0603, Reel	MC0063W060317R50
Resistor, 7R5, 0.063W, 1%, 0603	MC0063W060317R50
Resistor, 7K87, 0.063W, 1%, 0603, Reel	MC0063W060317K87
Resistor, 7K87, 0.063W, 1%, 0603	MC0063W060317K87
Resistor, 7R87, 0.063W, 1%, 0603, Reel	MC0063W060317R87
Resistor, 7R87, 0.063W, 1%, 0603	MC0063W060317R87
Resistor, 71K5, 0.063W, 1%, 0603, Reel	MC0063W0603171K5
Resistor, 71K5, 0.063W, 1%, 0603	MC0063W0603171K5
Resistor, 71R5, 0.063W, 1%, 0603, Reel	MC0063W0603171R5
Resistor, 71R5, 0.063W, 1%, 0603	MC0063W0603171R5
Resistor, 715K, 0.063W, 1%, 0603, Reel	MC0063W06031715K
Resistor, 715K, 0.063W, 1%, 0603	MC0063W06031715K
Resistor, 715R, 0.063W, 1%, 0603, Reel	MC0063W06031715R
Resistor, 715R, 0.063W, 1%, 0603	MC0063W06031715R
Resistor, 75K, 0.063W, 1%, 0603, Reel	MC0063W0603175K
Resistor, 75K, 0.063W, 1%, 0603	MC0063W0603175K
Resistor, 75R, 0.063W, 1%, 0603, Reel	MC0063W0603175R
Resistor, 75R, 0.063W, 1%, 0603	MC0063W0603175R
Resistor, 750K, 0.063W, 1%, 0603, Reel	MC0063W06031750K
Resistor, 750K, 0.063W, 1%, 0603	MC0063W06031750K
Resistor, 750R, 0.063W, 1%, 0603, Reel	MC0063W06031750R
Resistor, 750R, 0.063W, 1%, 0603	MC0063W06031750R
Resistor, 78K7, 0.063W, 1%, 0603, Reel	MC0063W0603178K7
Resistor, 78K7, 0.063W, 1%, 0603	MC0063W0603178K7
Resistor, 78R7, 0.063W, 1%, 0603, Reel	MC0063W0603178R7
Resistor, 78R7, 0.063W, 1%, 0603	MC0063W0603178R7
Resistor, 787K, 0.063W, 1%, 0603, Reel	MC0063W06031787K
Resistor, 787K, 0.063W, 1%, 0603	MC0063W06031787K
Resistor, 787R, 0.063W, 1%, 0603, Reel	MC0063W06031787R
Resistor, 787R, 0.063W, 1%, 0603	MC0063W06031787R
Resistor, 8K2, 0.063W, 1%, 0603, Reel	MC0063W060318K2
Resistor, 8K2, 0.063W, 1%, 0603	MC0063W060318K2
Resistor, 8M2, 0.063W, 1%, 0603, Reel	MC0063W060318M20

Description	Part Number
Resistor, 8M2, 0.063W, 1%, 0603	MC0063W060318M20
Resistor, 8R2, 0.063W, 1%, 0603, Reel	MC0063W060318R20
Resistor, 8R2, 0.063W, 1%, 0603	MC0063W060318R20
Resistor, 8K25, 0.063W, 1%, 0603, Reel	MC0063W060318K25
Resistor, 8K25, 0.063W, 1%, 0603	MC0063W060318K25
Resistor, 8R25, 0.063W, 1%, 0603, Reel	MC0063W060318R25
Resistor, 8R25, 0.063W, 1%, 0603	MC0063W060318R25
Resistor, 8K66, 0.063W, 1%, 0603, Reel	MC0063W060318K66
Resistor, 8K66, 0.063W, 1%, 0603	MC0063W060318K66
Resistor, 8R66, 0.063W, 1%, 0603, Reel	MC0063W060318R66
Resistor, 8R66, 0.063W, 1%, 0603	MC0063W060318R66
Resistor, 82K, 0.063W, 1%, 0603, Reel	MC0063W0603182K
Resistor, 82K, 0.063W, 1%, 0603	MC0063W0603182K
Resistor, 82R, 0.063W, 1%, 0603, Reel	MC0063W0603182R
Resistor, 82R, 0.063W, 1%, 0603	MC0063W0603182R
Resistor, 82K5, 0.063W, 1%, 0603, Reel	MC0063W0603182K5
Resistor, 82K5, 0.063W, 1%, 0603	MC0063W0603182K5
Resistor, 82R5, 0.063W, 1%, 0603, Reel	MC0063W0603182R5
Resistor, 82R5, 0.063W, 1%, 0603	MC0063W0603182R5
Resistor, 820K, 0.063W, 1%, 0603, Reel	MC0063W06031820K
Resistor, 820K, 0.063W, 1%, 0603	MC0063W06031820K
Resistor, 820R, 0.063W, 1%, 0603, Reel	MC0063W06031820R
Resistor, 820R, 0.063W, 1%, 0603	MC0063W06031820R
Resistor, 825K, 0.063W, 1%, 0603, Reel	MC0063W06031825K
Resistor, 825K, 0.063W, 1%, 0603	MC0063W06031825K
Resistor, 825R, 0.063W, 1%, 0603, Reel	MC0063W06031825R
Resistor, 825R, 0.063W, 1%, 0603	MC0063W06031825R
Resistor, 86K6, 0.063W, 1%, 0603, Reel	MC0063W0603186K6
Resistor, 86K6, 0.063W, 1%, 0603	MC0063W0603186K6
Resistor, 86R6, 0.063W, 1%, 0603, Reel	MC0063W0603186R6
Resistor, 86R6, 0.063W, 1%, 0603	MC0063W0603186R6
Resistor, 866K, 0.063W, 1%, 0603, Reel	MC0063W06031866K
Resistor, 866K, 0.063W, 1%, 0603	MC0063W06031866K
Resistor, 866R, 0.063W, 1%, 0603, Reel	MC0063W06031866R
Resistor, 866R, 0.063W, 1%, 0603	MC0063W06031866R
Resistor, 9K09, 0.063W, 1%, 0603, Reel	MC0063W060319K09
Resistor, 9K09, 0.063W, 1%, 0603	MC0063W060319K09
Resistor, 9K1, 0.063W, 1%, 0603, Reel	MC0063W060319K1
Resistor, 9K1, 0.063W, 1%, 0603	MC0063W060319K1



Thick Film Chip Resistor 0603



Description	Part Number
Resistor, 9M1, 0.063W, 1%, 0603, Reel	MC0063W060319M10
Resistor, 9M1, 0.063W, 1%, 0603	MC0063W060319M10
Resistor, 9R1, 0.063W, 1%, 0603, Reel	MC0063W060319R10
Resistor, 9R1, 0.063W, 1%, 0603	MC0063W060319R10
Resistor, 9K53, 0.063W, 1%, 0603, Reel	MC0063W060319K53
Resistor, 9K53, 0.063W, 1%, 0603	MC0063W060319K53
Resistor, 9M53, 0.063W, 1%, 0603, Reel	MC0063W060319M53
Resistor, 9M53, 0.063W, 1%, 0603	MC0063W060319M53
Resistor, 9R53, 0.063W, 1%, 0603, Reel	MC0063W060319R53
Resistor, 9R53, 0.063W, 1%, 0603	MC0063W060319R53
Resistor, 90K9, 0.063W, 1%, 0603, Reel	MC0063W0603190K9
Resistor, 90K9, 0.063W, 1%, 0603	MC0063W0603190K9
Resistor, 90R9, 0.063W, 1%, 0603, Reel	MC0063W0603190R9
Resistor, 90R9, 0.063W, 1%, 0603	MC0063W0603190R9
Resistor, 909K, 0.063W, 1%, 0603, Reel	MC0063W06031909K
Resistor, 909K, 0.063W, 1%, 0603	MC0063W06031909K
Resistor, 909R, 0.063W, 1%, 0603, Reel	MC0063W06031909R

Description	Part Number
Resistor, 909R, 0.063W, 1%, 0603	MC0063W06031909R
Resistor, 91K, 0.063W, 1%, 0603, Reel	MC0063W0603191K
Resistor, 91K, 0.063W, 1%, 0603	MC0063W0603191K
Resistor, 91R, 0.063W, 1%, 0603, Reel	MC0063W0603191R
Resistor, 91R, 0.063W, 1%, 0603	MC0063W0603191R
Resistor, 910K, 0.063W, 1%, 0603, Reel	MC0063W06031910K
Resistor, 910K, 0.063W, 1%, 0603	MC0063W06031910K
Resistor, 910R, 0.063W, 1%, 0603, Reel	MC0063W06031910R
Resistor, 910R, 0.063W, 1%, 0603	MC0063W06031910R
Resistor, 95K3, 0.063W, 1%, 0603, Reel	MC0063W0603195K3
Resistor, 95K3, 0.063W, 1%, 0603	MC0063W0603195K3
Resistor, 95R3, 0.063W, 1%, 0603, Reel	MC0063W0603195R3
Resistor, 95R3, 0.063W, 1%, 0603	MC0063W0603195R3
Resistor, 953K, 0.063W, 1%, 0603, Reel	MC0063W06031953K
Resistor, 953K, 0.063W, 1%, 0603	MC0063W06031953K
Resistor, 953R, 0.063W, 1%, 0603, Reel	MC0063W06031953R
Resistor, 953R, 0.063W, 1%, 0603	MC0063W06031953R

