


# Wire Wound Type Common Mode Filter




1. High common mode impedance at high frequency cause excellent noise suppression performance.
2. WBA0805D series realizes small size and low profile. 2.0x1.2x1.2 mm.
3. 100% Lead(Pb) & Halogen-Free and RoHS compliant.

Part Number	Z (Ω)Min	Freq (MHz)	Rdc (Ω) max.	Irms (mA)max.	Rated Volt. (Vdc)max.	IR (MΩ) min.
WBA0805D801PT-HF M	800	100	0.88	300	50	10

## MECHANICAL

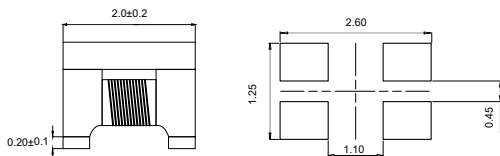


SUGGEST LAYOUT

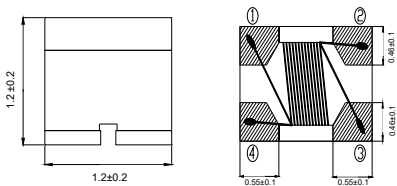


Dimension : mm


## SCHEMATICS

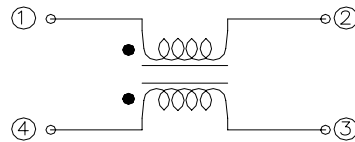

## IMPEDEANCE FREQUENCY

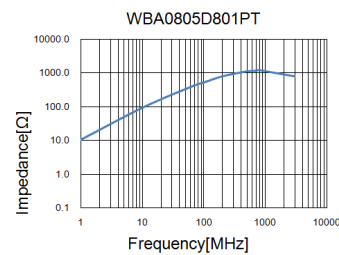


## TAPING AND PACKING

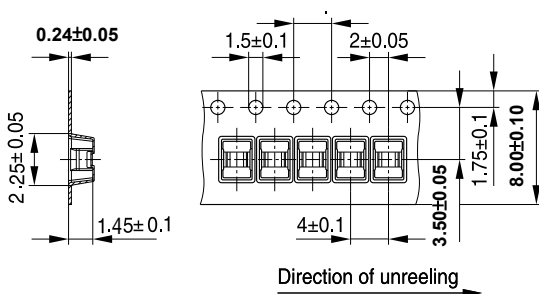

Direction of unreeling

IND1752-J-E

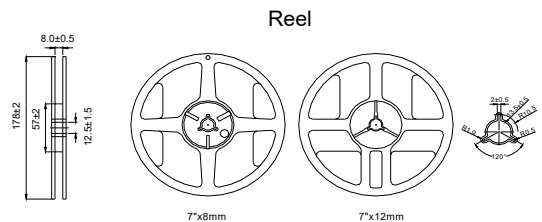

Dimensions in mm

Quantity (pcs):  
2000 PCS PER REEL  
5 REELS PER CARTON  
10000PCS PER CARTON