## SIEMENS

## Data sheet

## 3RU2126-4FC1



Overload relay 34...40 A Thermal For motor protection Size S0, Class 10 Stand-alone installation Main circuit: Spring-type terminal Auxiliary circuit: spring-type terminal Manual-Automatic-Reset

product brand name	SIRIUS
product designation	thermal overload relay
product type designation	3RU2
General technical data	
size of overload relay	S0
size of contactor can be combined company-specific	S0
power loss [W] for rated value of the current at AC in hot operating state	9.6 W
per pole	3.2 W
insulation voltage with degree of pollution 3 at AC rated value	690 V
surge voltage resistance rated value	6 kV
maximum permissible voltage for safe isolation in networks with grounded star point	
<ul> <li>between auxiliary and auxiliary circuit</li> </ul>	440 V
<ul> <li>between auxiliary and auxiliary circuit</li> </ul>	440 V
<ul> <li>between main and auxiliary circuit</li> </ul>	440 V
<ul> <li>between main and auxiliary circuit</li> </ul>	440 V
shock resistance acc. to IEC 60068-2-27	8g / 11 ms
type of protection according to ATEX directive 2014/34/EU	Ex II (2) GD
certificate of suitability according to ATEX directive 2014/34/EU	DMT 98 ATEX G 001
reference code acc. to IEC 81346-2	F
Substance Prohibitance (Date)	01.10.2009 00:00:00
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
<ul> <li>ambient temperature during operation</li> </ul>	-40 +70 °C
<ul> <li>ambient temperature during storage</li> </ul>	-55 +80 °C
<ul> <li>ambient temperature during transport</li> </ul>	-55 +80 °C
temperature compensation	-40 +60 °C
relative humidity during operation	10 95 %
Main circuit	
number of poles for main current circuit	3
adjustable current response value current of the current-dependent overload release	34 40 A
<ul> <li>operating voltage rated value</li> </ul>	690 V
• operating voltage at AC-3 rated value maximum	690 V

operating frequency rated value	50 60 Hz			
operating frequency rated value	40 A			
operational current rated value operating power at AC-3	40 A			
at 400 V rated value	18.5 kW			
at 500 V rated value				
at 690 V rated value	22 kW 37 kW			
	57 KVV			
Auxiliary circuit				
design of the auxiliary switch	integrated			
number of NC contacts for auxiliary contacts	1			
note	for contactor disconnection			
number of NO contacts for auxiliary contacts	1			
note	for message "Tripped"			
number of CO contacts for auxiliary contacts	0			
operational current of auxiliary contacts at AC-15 • at 24 V	3 A			
	3 A			
● at 110 V ● at 120 V	3 A			
• at 120 V	3 A			
• at 230 V	2 A 1 A			
• at 400 V	1 A			
operational current of auxiliary contacts at DC-13 • at 24 V	2 A			
• at 24 v	2 A 0.3 A			
• at 10 V	0.3 A 0.22 A			
• at 125 V	0.22 A 0.22 A			
• at 220 V	0.22 A 0.11 A			
contact rating of auxiliary contacts according to UL	B600 / R300			
	B0007 K300			
Protective and monitoring functions	01400.40			
trip class	CLASS 10			
design of the overload release	thermal			
UL/CSA ratings				
full-load current (FLA) for 3-phase AC motor				
at 480 V rated value	40 A			
at 600 V rated value	40 A			
Short-circuit protection				
design of the fuse link				
<ul> <li>for short-circuit protection of the auxiliary switch</li> </ul>	fuse gG: 6 A, quick: 10 A			
required				
Installation/mounting/dimensions				
Installation/ mounting/ dimensions				
mounting position	any			
mounting position fastening method	stand-alone installation			
mounting position fastening method height	stand-alone installation 114 mm			
mounting position fastening method height width	stand-alone installation 114 mm 45 mm			
mounting position fastening method height width depth	stand-alone installation 114 mm			
mounting position         fastening method         height         width         depth         Connections/ Terminals	stand-alone installation 114 mm 45 mm 95 mm			
mounting position         fastening method         height         width         depth         Connections/ Terminals         product function removable terminal for auxiliary and	stand-alone installation 114 mm 45 mm			
mounting position         fastening method         height         width         depth         Connections/ Terminals         product function removable terminal for auxiliary and control circuit	stand-alone installation 114 mm 45 mm 95 mm			
mounting position         fastening method         height         width         depth         Connections/ Terminals         product function removable terminal for auxiliary and control circuit         type of electrical connection	stand-alone installation 114 mm 45 mm 95 mm No			
mounting position         fastening method         height         width         depth         Connections/ Terminals         product function removable terminal for auxiliary and control circuit         type of electrical connection         • for main current circuit	stand-alone installation 114 mm 45 mm 95 mm No Spring-loaded terminals			
mounting position         fastening method         height         width         depth         Connections/ Terminals         product function removable terminal for auxiliary and control circuit         type of electrical connection         • for main current circuit         • for auxiliary and control circuit	stand-alone installation 114 mm 45 mm 95 mm No spring-loaded terminals spring-loaded terminals			
mounting position         fastening method         height         width         depth         Connections/ Terminals         product function removable terminal for auxiliary and control circuit         type of electrical connection         • for main current circuit	stand-alone installation 114 mm 45 mm 95 mm No Spring-loaded terminals			
mounting position         fastening method         height         width         depth         Connections/ Terminals         product function removable terminal for auxiliary and control circuit         type of electrical connection         • for main current circuit         • for auxiliary and control circuit         arrangement of electrical connectors for main current	stand-alone installation 114 mm 45 mm 95 mm No spring-loaded terminals spring-loaded terminals			
mounting position         fastening method         height         width         depth         Connections/ Terminals         product function removable terminal for auxiliary and control circuit         type of electrical connection         • for main current circuit         • for auxiliary and control circuit         arrangement of electrical connectors for main current circuit	stand-alone installation 114 mm 45 mm 95 mm No spring-loaded terminals spring-loaded terminals			
mounting position         fastening method         height         width         depth         Connections/ Terminals         product function removable terminal for auxiliary and control circuit         type of electrical connection         • for main current circuit         • for auxiliary and control circuit         arrangement of electrical connectors for main current circuit         type of connectable conductor cross-sections	stand-alone installation 114 mm 45 mm 95 mm No spring-loaded terminals spring-loaded terminals			
mounting position         fastening method         height         width         depth         Connections/ Terminals         product function removable terminal for auxiliary and control circuit         type of electrical connection         • for main current circuit         • for auxiliary and control circuit         arrangement of electrical connectors for main current circuit         type of connectable conductor cross-sections         • for main contacts	stand-alone installation 114 mm 45 mm 95 mm No Spring-loaded terminals spring-loaded terminals Top and bottom			
mounting position         fastening method         height         width         depth         Connections/ Terminals         product function removable terminal for auxiliary and control circuit         type of electrical connection         • for main current circuit         • for auxiliary and control circuit         arrangement of electrical connectors for main current circuit         type of connectable conductor cross-sections         • for main contacts         — solid or stranded	stand-alone installation 114 mm 45 mm 95 mm No spring-loaded terminals spring-loaded terminals Top and bottom 1x (1 10 mm <sup>2</sup> )			
mounting position         fastening method         height         width         depth         Connections/ Terminals         product function removable terminal for auxiliary and control circuit         type of electrical connection         • for main current circuit         • for auxiliary and control circuit         arrangement of electrical connectors for main current circuit         type of connectable conductor cross-sections         • for main contacts         — solid or stranded         — finely stranded with core end processing	stand-alone installation 114 mm 45 mm 95 mm No spring-loaded terminals spring-loaded terminals Top and bottom 1x (1 10 mm <sup>2</sup> ) 1x (1 6 mm <sup>2</sup> )			

	le conductor cross-sec	tions				
<ul> <li>for auxiliary c</li> </ul>	ontacts					
— solid or stranded			2x (0.5 2.5 mm²)			
<ul> <li>finely stranded with core end processing</li> </ul>		cessing 2x	(0.5 1.5 mm <sup>2</sup> ), 2x (0.7	5 2.5 mm²)		
<ul> <li>— finely stranded without core end processing</li> </ul>		processing 2x	2x (0.5 1.5 mm²)			
<ul> <li>at AWG cables for auxiliary contacts</li> </ul>		2x	2x (20 14)			
design of screwdriver shaft		Dia	Diameter 3 mm			
size of the screwdriver tip		3,0	3,0 x 0,5 mm			
Safety related data						
failure rate [FIT] with low demand rate acc. to SN 31920		o SN 31920 50	50 FIT			
MTTF with high demand rate		22	2 280 у			
T1 value for proof IEC 61508	test interval or service	life acc. to 20	20 у			
protection class IP	protection class IP on the front acc. to IEC 60529		IP20			
touch protection on the front acc. to IEC 60529		<b>60529</b> fin	finger-safe, for vertical contact from the front			
Display						
display version for s	witching status	Sli	de switch			
Certificates/ approv	•					
General Product A				For use in hazardo	us locations	
(Ch	(m)	ŝ	r M F	IFCF.		
(QP)	$(\mathbf{m})$	( <sup>v</sup> L)	FHI	IECEX	(Ex)	
CSA		UL UL	LIIL	IECEx	ATEX	
	e 14	T (0 ())		M · (0) · ·		
Declaration of Conformity Test Certifica		Test Certificates		Marine / Shipping		
	Miscellaneous	Special Test	Type Test		10.70	
()	<u>IMISCEIIdHEOUS</u>	Certificate	<u>Certificates/Test</u>	Start Wast	ALL A	
			Report	a second		
EG-Konf.				ABS	BUREAU	
					VERITAS	
Marine / Shipping					other	
	0		-		Oraction	
Llovdis	(BA)			Armonie	<b>Confirmation</b>	
Kegister				DNV-GL		
LRS	PRS	RINA	RMRS	DAVOLICINENT		
Railway						
Vibration and Shock	<u>í</u>					
Further information						
Information- and Downloadcenter (Catalogs, Brochures,)						
https://www.siemen	<u>s.com/ic10</u> ne ordering system)					
	.siemens.com/mall/en/er	n/Catalog/product?mlf	<u> =3RU21</u> 26-4FC1			
Cax online generator						

Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RU2126-4FC1


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3RU2126-4FC1


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RU2126-4FC1&lang=en


## Characteristic: Tripping characteristics, I<sup>2</sup>t, Let-through current https://support.industry.siemens.com/cs/ww/en/ps/3RU2126-4FC1/char Further characteristics (e.g. electrical endurance, switching frequency) http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RU2126-4FC1&objecttype=14&gridview=view1

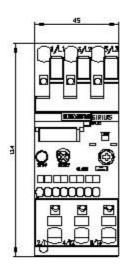

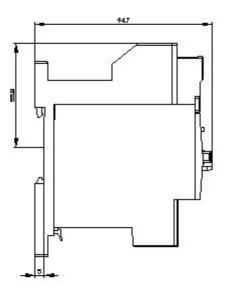

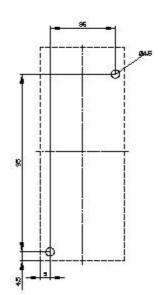

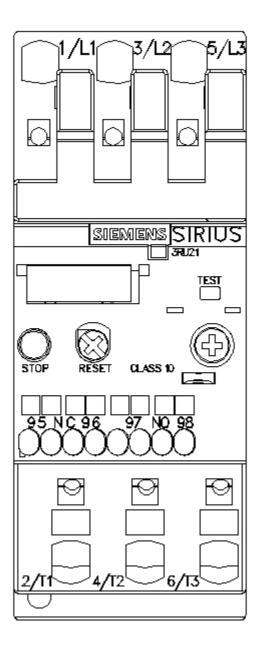

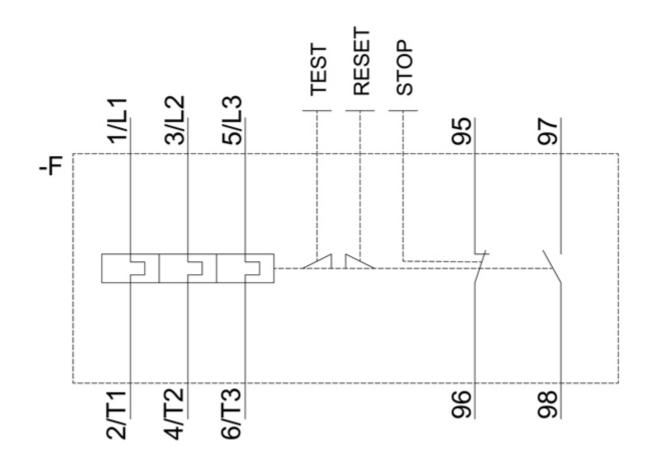

last modified:

12/15/2020 🖸