


Lead Lengths 40mm +5/-0mm

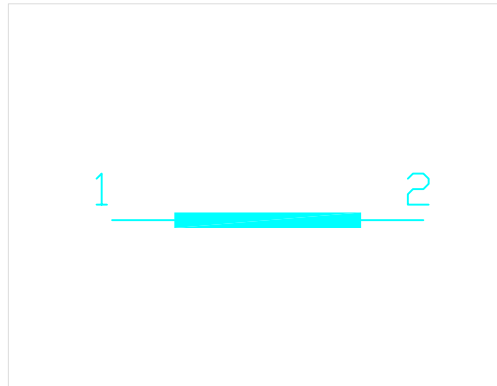

### TOR

PART No	T106-26A	AL 67
SIZE (OD/ID/Ht)	26.9/14.5/7.92	
COATING	NA	
MATERIAL	IRON POWDER	
K VALUE	NA	

### Cu Wire


PART No	COP224	WEIGHT (g)
SIZE (Dia)	0.56mm	
COATING	SOL 2	
COAT MATERIAL	NA	

### Winding

No Turns	189
No Layers	CONTINUOUS
No Strands	ONE
Direction	AS PER SKETCH

TEST	Nom	Tolerance	Min	Max
Inductance (mH)	2.4	+20/-20%	1.9	2.9
Res (Ohm)	0.4	+15/-15%	0.34	0.46
Hi Pot (V AC)	N/A			

ALL DIMENSIONS IN MM / ANGLES IN DECIMAL DEGREES



ROXBURGH ELECTRONICS LTD

TITLE ASSEMBLY FOR SF1123

DrgNo SF1123-CHK

ISSUE 2

PROCUREMENT SPECIFICATION  
FOR SF1123-CHK

CUSTOMER  
REFERENCE

Sheet 1 of 1 | Aprvd Date 30/06/00 | Aprvd By SW | Drwn by BFS | SCALE NTS | CNN--- | Location N: \DWG\PS\CHK\CHK00098

© ROXBURGH ELECTRONICS LTD, FOXHILLS INDUSTRIAL PARK, SCUNTHORPE, NORTH LINCOLNSHIRE, DN15 8QJ TEL +44 1724 281770 F +44 1724 270230