

TE Internal #: 603504-2


Butt Splice, 12 – 10 AWG Wire Size, 3 – 6 mm<sup>2</sup> Wire Size, Sealable, 6.1 mm [.24 in] Barrel Inside Diameter, 5180 – 13100 CMA Wire Size,

Copper, Splices

View on TE.com >



Terminals & Splices > Splices

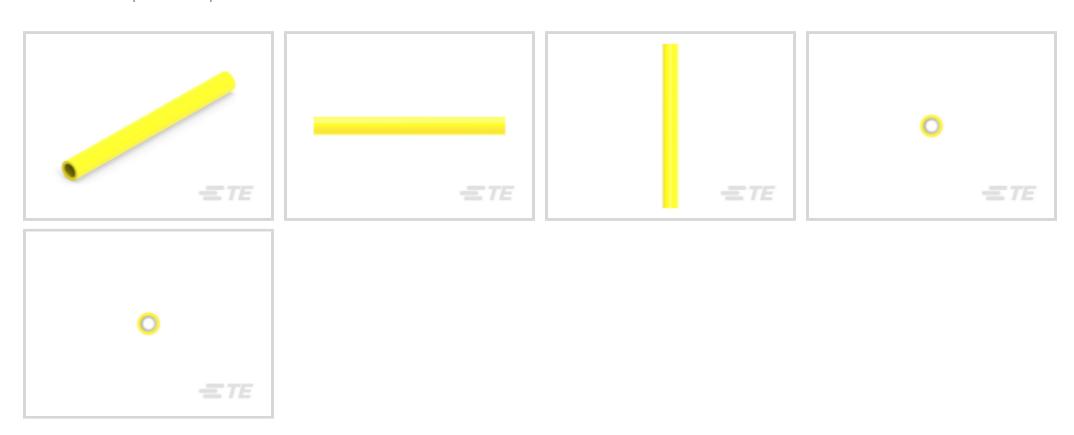

Splice Type: Butt Splice
Wire Size: 3-6 mm<sup>2</sup>

Sealable: Yes

Compatible Insulation Diameter Range: 6.1 mm [ .24 in ]

## **Features**

Product Type Features	
Splice Type	Butt Splice
Sealable	Yes
Compatible With Discrete Wire Type	Stranded
Wire Insulation Support Retention Type	Insulation Support
Configuration Features	
Compatible With Wire & Cable Type	Discrete Wire
Electrical Characteristics	
Operating Voltage	600 V
Body Features	
Insulation Type	Pre-Insulated
Insulation Material	Nylon
	.007 oz
Primary Product Color	Yellow

Tin

**Contact Features** 

Terminal Plating Material



Contact Base Material	Copper
Barrel Type	Closed
Mechanical Attachment	
Wire Insulation Support	With
Dimensions	
Recovered Inside Diameter	2.92 mm[.115 in]
Outside Diameter	6.35 mm[.25 in]
Wire Size	5180 – 13100 CMA
Compatible Insulation Diameter Range	6.1 mm[.24 in]
Barrel Inside Diameter	6.1 mm[.24 in]
Product Length	47.5 mm[1.87 in]
Usage Conditions	
Insulation Option	Fully Insulated
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]
Industry Standards	
Government Qualified Splice	No
Packaging Features	
Packaging Quantity	50
Packaging Method	Loose Piece

## **Product Compliance**

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JAN 2022 (223) Does not contain REACH SVHC
Halogen Content	Not Yet Reviewed for halogen content
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer




This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

## **Customers Also Bought**







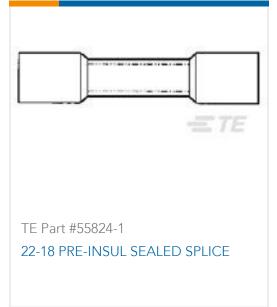









TE Part #6-23629-1
PIN,STRAIGHT,GROOVED,.3125 OD,
1.519 LG

## **Documents**

Product Drawings
12-10 PRE-INSUL SEALED SPLICE

English

**CAD Files** 

3D PDF

3D



**Customer View Model** 

ENG\_CVM\_CVM\_603504-2\_K.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_603504-2\_K.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_603504-2\_K.3d\_stp.zip

English

**Customer View Model** 

ENG\_CVM\_603504-2\_N.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_603504-2\_N.3d\_stp.zip

English

**Customer View Model** 

ENG\_CVM\_603504-2\_N.2d\_dxf.zip

English

3D PDF

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.