555856-3



AMPINNERGY® Power Entry Cable Assembly, 8-wire/4-circuit (4-2-2), shared neutral, 4 feet

- Used to interface between manufactured wiring and other wiring systems, such as building wiring, fixture wiring, or access floor module wiring
- Mates to line connector cable assemblies, power junction boxes, power distribution modules (PDMs), zone distribution modules (ZDBs) and power transition units (PTUs)

OBSOLETE

This product was discontinued on: June 30, 2020

Product Classification

Regional Availability North America

Product Type Power entry cable assembly

Product Brand AMPINNERGY®
Product Series AMPINNERGY

General Specifications

Application Line entry connection

Construction TypeCorrugated hoseInterface, Connector APower male plug

Interface, Connector B Unterminated

Neutral Type Shared

Wiring 8-Wire/4 Circuit (4-2-2)

Dimensions

Cord Length 1.22 m | 4.003 ft


Exposed Conductor Length 304.8 mm | 12 in

Neutral Conductor Gauge, solid 10-12 AWG

Outline Drawing



555856-3

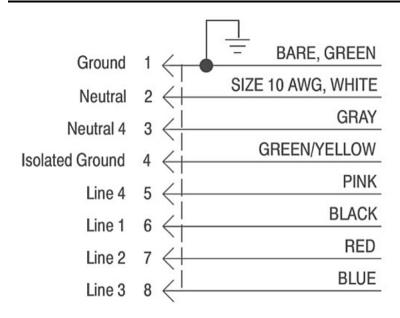

Electrical Specifications

Current Rating, maximum 20 A

Voltage Rating, maximum 125 Vac | 250 Vac

Environmental Specifications

Environmental Space Indoor

Safety Standard CEC 2015 | CSA 22.2 | NEC 2013 | UL 1286 | UL 183 | UL 498

Packaging and Weights

Packaging quantity 1
Packaging Type Bag

Regulatory Compliance/Certifications

Agency Classification

CHINA-ROHS Below maximum concentration value

REACH-SVHC Compliant as per SVHC revision on www.commscope.com/ProductCompliance

ROHS Compliant



COMMSCOPE COMMSCOPE