



REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	2024.03.02	







03~15P



02P

- Specifications(规格):
- 1.Voltage rating(额定电压):125V AC DC
 - 2.Current rating(额定电流):2.5A AC/DC
 - 3.Withstanding voltage(耐压值):≥800V AC/minute
 - 4. Insulation resistance(绝缘电阻):1000MΩ Min
 - 5.Contact resistance(绝缘电阻):20mΩ Max
 - 6. Temperature range(使用温度):-25℃~+85℃

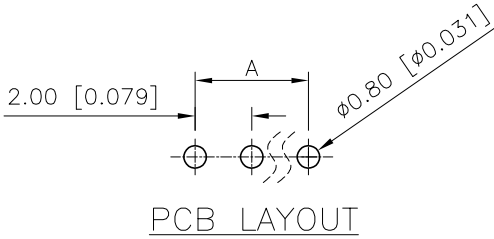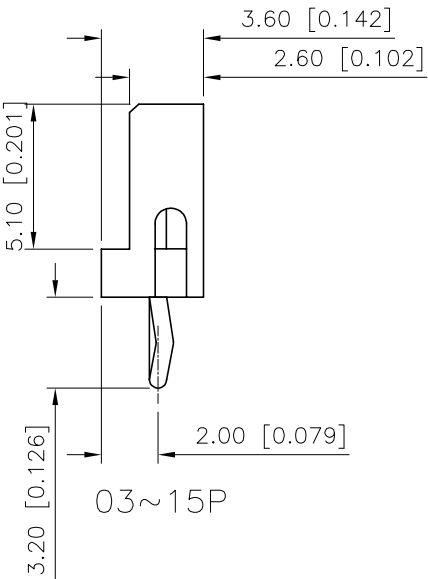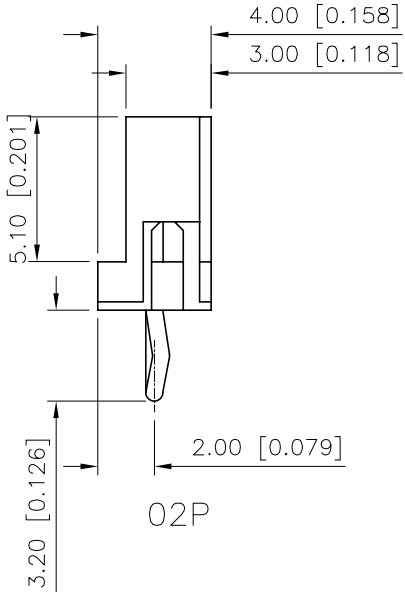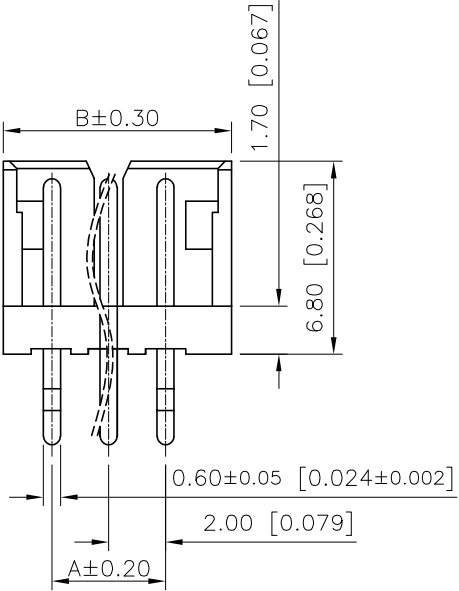

- PART NO.:
X2004 W V-XX-NO SN
① ② ③ ④ ⑤ ⑥
- ① Series No
 - ② Category:W-Wafer
 - ③ Welding Board Angle:V-Straight 180°
 - ④ Row No-Pin: XX-02P~15P
 - ⑤ Material:N0-PA66 UL94V-0
 - ⑥ Plating:SN-Bright Tin Plated

NUMBER OF POSITIONS	DIM.A	DIM.B	NUMBER OF POSITIONS	DIM.A	DIM.B
02	2.00	6.00	09	16.00	20.00
03	4.00	8.00	10	18.00	22.00
04	6.00	10.00	12	20.00	24.00
05	8.00	12.00	13	24.00	28.00
06	10.00	14.00	14	26.00	30.00
07	12.00	16.00	15	28.00	32.00
08	14.00	18.00			

X2004WV-XX-N0SN	PA66 UL 94V-0	BRASS	Tin PLATED	X2004H
PART NO.	MATERIAL	MATERIAL(PIN)	FINISH(PIN)	Suitable XKB Terminal

ANGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	

DESIGN	桑 葚	VIEW:	MODEL TYPE: 2.0mm Crimp Style Connector
CHECKED		UNIT: mm/in	PART NO.: X2004WV-XX-N0SN
APPROVED		SIZE: A4	DWG NO.:

XKB INDUSTRIAL PRECISION CO.,LIMITED

SCALE	PAGE	REVISION
N/A	1/1	A0