

REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A1	N/A		图框升级整理图面	2024.08.06	阿 树

Specifications:
规格:
Voltage rating:600V AC/DC
额定电压: 600V AC/DC
Current rating:9A AC/DC
额定电流: 9A AC/DC
Withstanding voltage:1500V AC/minute
耐受电压: 1500V AC/分钟
Temperature range:-25℃~+85℃
温度范围: -25℃~+85℃
Insulation resistance:≥1000MΩ
绝缘电阻: ≥1000MΩ
Contact resistance:≤10mΩ
接触电阻: ≤10mΩ
After environmental testing:≤20mΩ
环境测试后: ≤20兆欧

PART NO.:
X9357 W V-2xXX HB-NO SN XX
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No
② Category:W-Wafer
③ Welding Board Angle:V-Straight 180°
④ Row No-Pin No: 2xXX-2x02P~2x12P
⑤ Plug the Pin&Specal NO.:HB-The hollow needle with positioning column arrange ushering
⑥ Material:NO-PA66 94V-0; N2-PA66 94V-2
⑦ Planting Category:SN-Bright tin plating
⑧ Color:Blank-natural color

Poles	Dimensions(mm)		Poles	Dimensions(mm)	
	A	B		A	B
2x02	4.20	15.10	2x08	29.40	40.30
2x03	8.40	19.30	2x09	33.60	44.50
2x04	12.60	23.50	2x10	37.80	48.70
2x05	16.80	27.70	2x11	42.00	52.90
2x06	21.00	31.90	2x12	46.20	57.10
2x07	25.20	36.10			

X9357WV-2xXXHB-N0SN	Nylon 66 UL 94V-0	Brass	Tin-Plated	X9357HM-B
X9357WV-2xXXHB-N2SN	Nylon 66 UL 94V-2			
PART NO	Material	Material(Pin)	Finish(Pin)	Suitable XKB Terminal




ANGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿 树	VIEW:		MODEL TYPE: 4.20 mm Crimp Style Connectors
CHECKED		UNIT:	mm/in	PART NO.: X9357WV-2xXXHB-N0SN
APPROVED		SIZE:	A4	DWG NO.:

XKB INDUSTRIAL PRECISION CO.,LIMITED

SCALE	PAGE	REVISION
N/A	1/1	A1

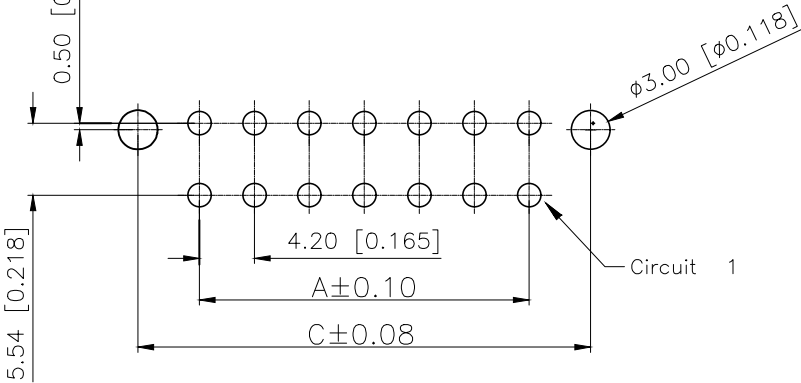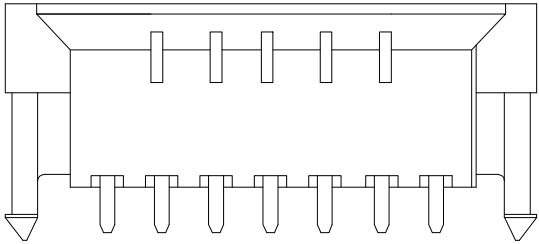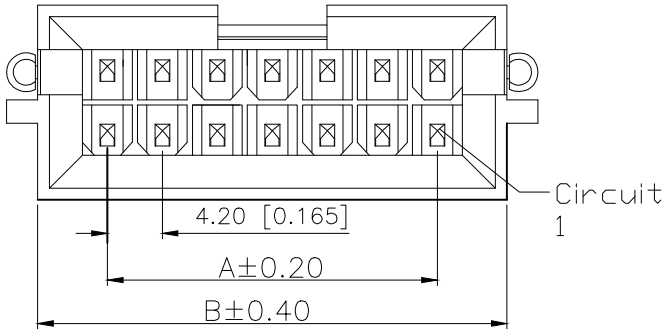

P.C.B Layout