


for low current rectification and high speed switching applications

Features

- Extremely small surface mounting type

PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode




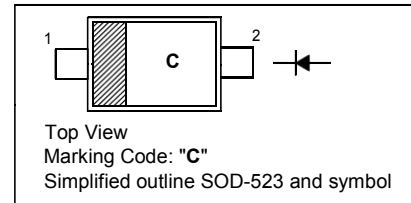


Absolute Maximum Ratings ($T_a = 25\text{ }^\circ\text{C}$)


Parameter	Symbol	Value	Unit
Reverse Voltage	V_R	30	V
Mean Rectifying Current	I_O	200	mA
Peak Forward Surge Current (60Hz for Cyc.)	I_{FSM}	1	A
Junction Temperature	T_j	125	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	- 40 to + 125	$^\circ\text{C}$

Characteristics at $T_a = 25\text{ }^\circ\text{C}$


Parameter	Symbol	Max.	Unit
Forward Voltage at $I_F = 200\text{ mA}$	V_F	0.6	V
Reverse Current at $V_R = 10\text{ V}$	I_R	30	μA

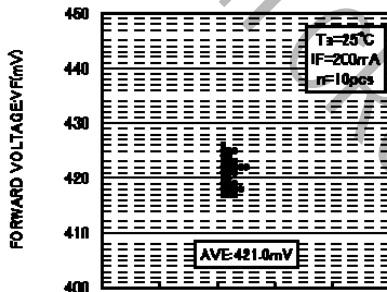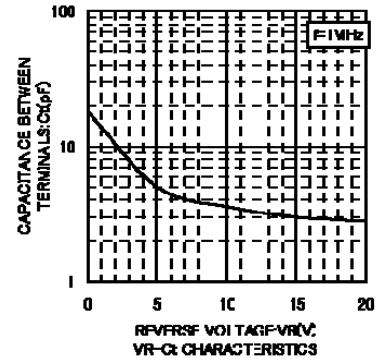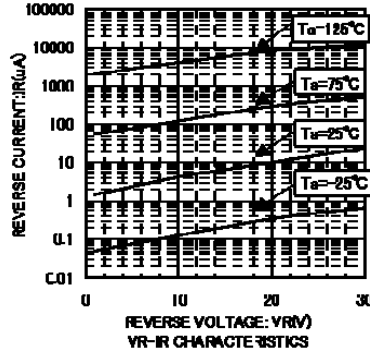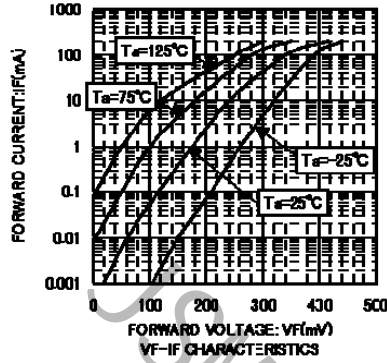


VF DISPERSION MAP








IR DISPERSION MAP

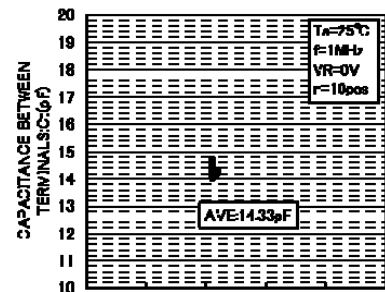

Ct DISPERSION MAP

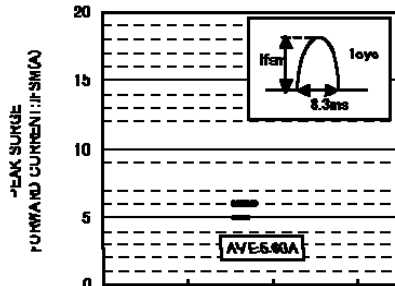

FSM DISPERSION MAP

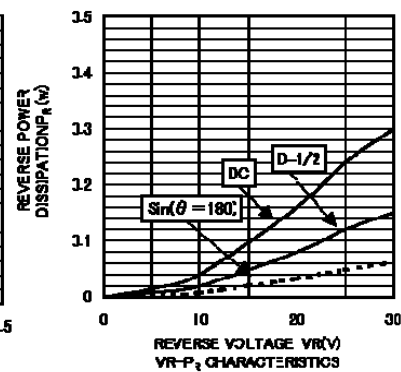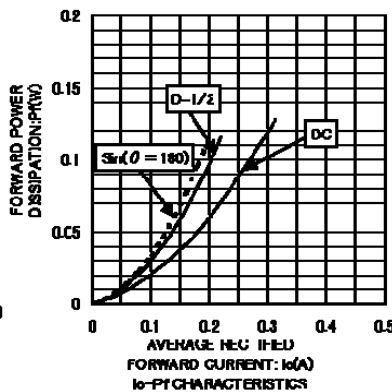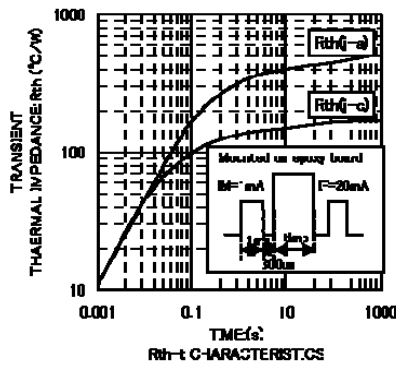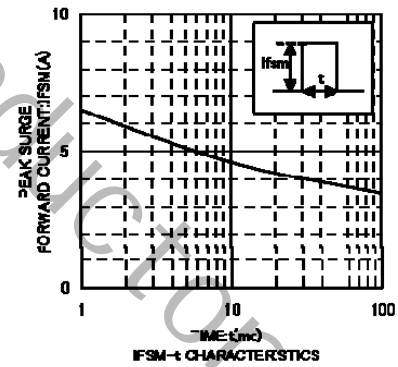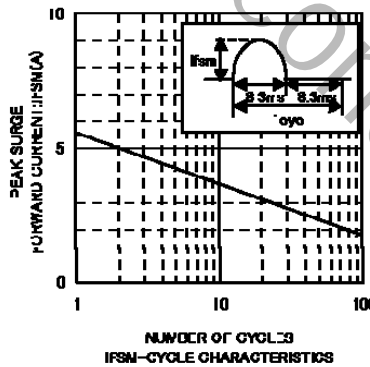

PACKAGE OUTLINE

Plastic surface mounted package; 2 leads

SOD-523

