


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	LEN1630329~332	2016/03/09	Vicky	Update Logo
D	C210636	2021/04/23	Vicky	△X8
E	C221880	2022/12/06	Vicky	△X1

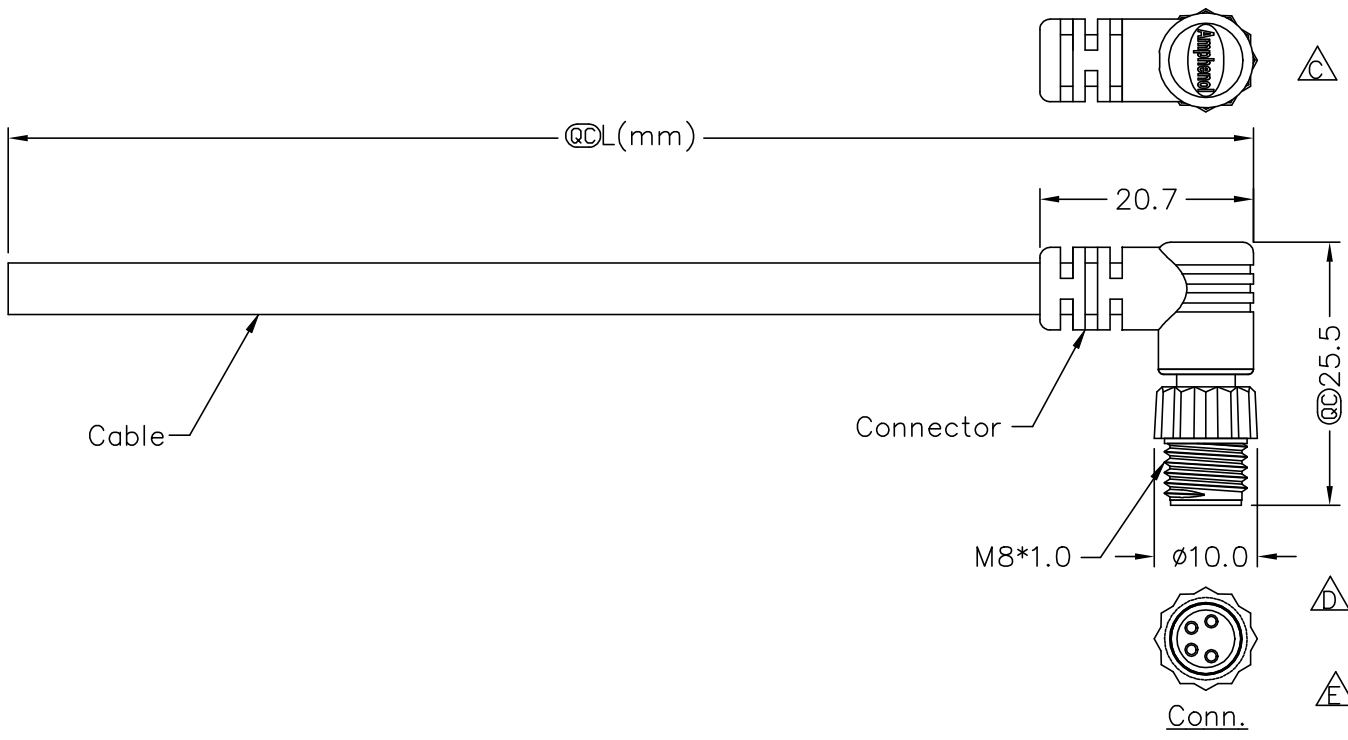

- △ Note:
- * RoHS Compliant
 - * @C Important dimension
 - △ * Waterproof rate: IP67, mated Connector
 - Housing: Thermoplastic, Black
 - Pin: Copper alloy, Gold plated
 - Nut: Thermoplastic, Black
 - Outer mold: Thermoplastic, Black
 - * Cable: UL2464, PVC Jacket, Black
 - △ * Cable length tolerance:
 - 1M: +50/-0 mm
 - 1M < L ≤ 3M: +100/-0 mm
 - 3M < L ≤ 5M: +150/-0 mm
 - 5M < L ≤ 10M: ±100 mm
 - 10M < L ≤ 20M: ±200 mm
 - 20M < L ≤ 30M: ±300 mm
 - 30M < L ≤ 99M: ±500 mm

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF AMPHENOL LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY AMPHENOL LTW.

UNIT:mm	TITLE O SEN, M8 PLASTIC CABLE W/SR, M, M, MOLDING	
TOLERANCE ±0.5 mm	SCALE Free	SHEET 1 OF 2
REV. E	SIZE A4	@C: Inspection Item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Vicky	DATE 2016/03/09
DWG. NO △ 8P-XXAMMM-SR7AXX	CHECKED BY Rita	DATE 2016/03/09
CUSTOMER ALTW	APPROVED BY Lisa	DATE 2016/03/09

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

4P	5.0	22	8P-04AMMM-SR7AXX
3P			8P-03AMMM-SR7AXX
△ Contacts	Cable OD	AWG	Item No.

△ 8P-XXAMMM-SR7AXX

XX: No. Of Pin

↑
 XX: 01~99Meters
 01: 01Meter
 02: 02Meters
 :
 :
 99: 99Meters

Cable Length(L): 01~99Meters

Pin Out	4	Black	黑	4	Black	黑
	3	Blue	藍	3	Blue	藍
	1	Brown	棕	2	White	白
				1	Brown	棕
	Pin #	Wire		Pin #	Wire	
Conn.						
	3P			4P		

△ Pin Assignments Front View

UNIT: mm		TITLE O SEN, M8 PLASTIC CABLE W/SR, M, M, MOLDING	
TOLERANCE	±0.5 mm	SCALE Free	SHEET 2 OF 2
REV.	E	SIZE A4	QC: Inspection Item

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Vicky	DATE 2016/03/09
DWG. NO △ 8P-XXAMMM-SR7AXX	CHECKED BY Rita	DATE 2016/03/09
CUSTOMER ALTW	APPROVED BY Lisa	DATE 2016/03/09