



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C191412	2019/07/27	JC Chen	Add dimension

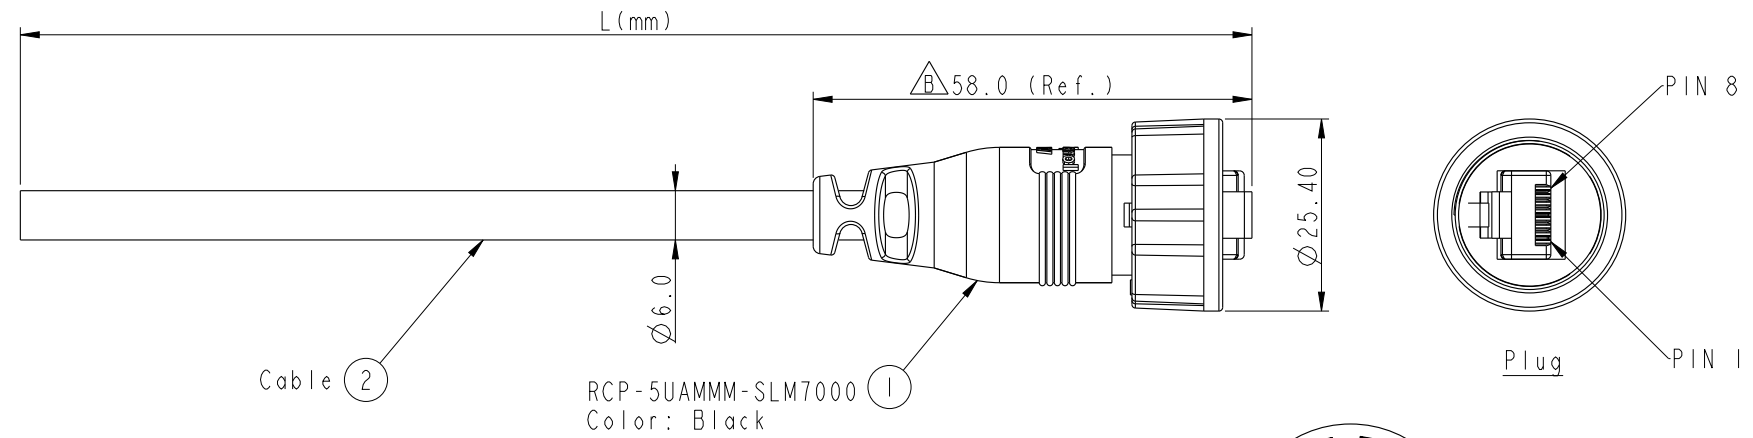

Pin Out		Plug
Wire Color		
Drain Wire	接地	
Brown	棕	8
Brown/white	棕/白	7
Green	綠	6
Blue/white	藍/白	5
Blue	藍	4
Green/white	綠/白	3
Orange	橙	2
Orange/white	橙/白	1

RCP-5UAMMM-SLM7AXX
 XX: 01~99Meter
 01: 01Meter
 02: 02Meters
 ...
 99: 99Meters
 Cable Length(L):01~99Meters
 X:
 (A)CAT5E UTP

Note:
 * (C) Important Dimension
 * Waterproof Rate:IP67.
 * Plug:PC,UL94V-2,Gold Plated,
 * Screw Nut:Nylon+GF,Black.
 * Gasket:EPDM,Black.
 * Cable: (A)CAT5E UTP,OD Max.: \varnothing 6.0,Black.
 * Cable Length Tolerance: 01M: \pm 40mm
 02~05M: \pm 60mm
 06~10M: \pm 100mm
 11~30M: \pm 200mm
 30~99M: \pm 500mm

UNIT:mm			TITLE RJ45,C SIZE CABLE 3P_LOCK 5E M CONN M PIN
TOLERANCE .X \pm 0.25 .XX \pm 0.1 .XXX \pm 0.05 ANGLES \pm 1°	SCALE 1:1	SIZE A4	SHEET 1 OF 1
REV. B	WC-REV. A.17	QC: Inspection item	

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY JC Chen	DATE 2019-07-27
DWG NO RCP-5UAMMM-SLM7AXX	CHECKED BY Li Feng	DATE 2019-07-27
CUSTOMER ALTW	APPROVED BY Jerry	DATE 2019-07-27